PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2407E010

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7116-4158 * SEQUENCE Nº 9








Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-4158-02	*	**MYC**	**YSD 4514105424**	**IMLER TRUCK B**

Applicable Terminals for this Tool:

7116-4158-02	**7116-4158-06**			

Anvil		Wire Crimper		Insulation Crimper	
7116-4158XA	(N)	7116-4158XW	(1)	7116-4158XI	(2)
CW (c) 3,22	*CW (i)* 3,90	*CW* 3,20		*CW* 3,90	


1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	O	0.00~0.50mm 0.30~0.90mm	0 0.46		The Bell Mouth is within the spec.**(*)**	O
	Not found any Bell Mouth in the insulation area.	O	0.00~0.30mm	0.12		The dimension of the cutting carrier is within the spec.**(*)**	O
	The lance height and shape are not deformed.	O	0.00~0.30mm 0.00~0.30mm	0.07 --		Bend up and Bend down are within the criteria**(*)**	O
	Not found any burr in the cutting carrier.	O	0.10~0.70mm	0.53		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	3º	0.4		The terminal is not bent sideway, look-king from the top**(*)**	O
	The wire barrel is free from major burrs.	O	3º	0.1		The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

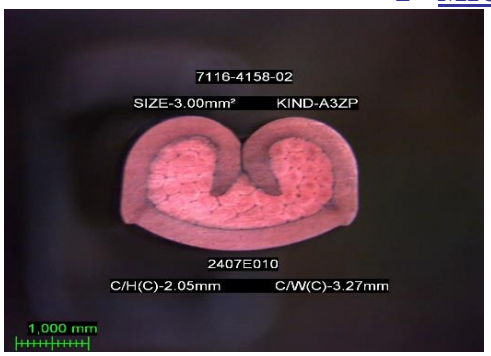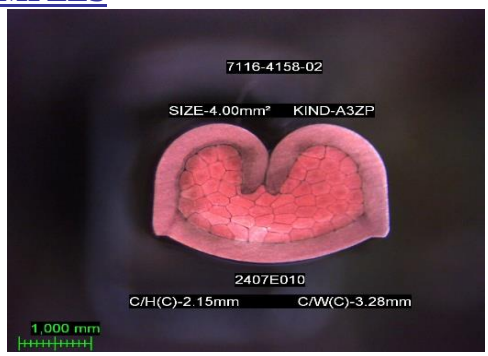2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	2,05	2,05	7,21
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	2,15	2,15	6,44
	+/-0.05		

REMARKS:

Aplicable wire range 3.00mm²~4.00mm²
SIZE-3.00mm² C/W(I)-4.01mm
SIZE-4.00mm² C/W(I)-4.02mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2024/set/20	Date: 2024/set/17	Date: 2024/set/17

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2407E010

LOWER WIRE KIND & SIZE

Wire kind: A3ZP

Wire size: 3 mm²

Nominal Cr. Height:	2,05	3,7	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,050	3,703
2	2,050	3,703
3	2,054	3,709
4	2,050	3,703
5	2,049	3,706
6	2,050	3,698
7	2,054	3,707
8	2,050	3,707
9	2,047	3,706
10	2,049	3,703
11	2,052	3,707
12	2,055	3,709
13	2,049	3,698
14	2,054	3,703
15	2,050	3,703
16	2,047	3,698
17	2,049	3,706
18	2,050	3,703
19	2,055	3,706
20	2,050	3,703
21	2,054	3,709
22	2,050	3,698
23	2,047	3,707
24	2,050	3,703
25	2,054	3,706
26	2,050	3,703
27	2,047	3,703
28	2,050	3,703
29	2,049	3,698
30	2,050	3,706
31	2,054	3,703
32	2,050	3,709
33	2,049	3,706
34	2,050	3,703
35	2,047	3,698
36	2,052	3,703
37	2,050	3,698
38	2,049	3,703
39	2,050	3,706
40	2,054	3,703
41	2,050	3,709
42	2,047	3,703
43	2,049	3,707
44	2,050	3,703
45	2,054	3,706
46	2,052	3,707
47	2,050	3,709
48	2,049	3,703
49	2,054	3,698
50	2,050	3,703
Average	2,05	3,70
Cmk	7,21	9,57

UPPER WIRE KIND & SIZE

Wire kind: A3ZP

Wire size: 4 mm²

Nominal Cr. Height:	2,15	4	mm
+/-	0,05	0,1	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,151	4,005
2	2,149	4,001
3	2,155	4,009
4	2,155	4,005
5	2,151	4,007
6	2,155	3,999
7	2,155	4,005
8	2,151	4,007
9	2,155	4,005
10	2,149	4,005
11	2,155	4,009
12	2,155	4,001
13	2,151	4,005
14	2,155	3,999
15	2,155	4,006
16	2,155	4,005
17	2,150	4,001
18	2,155	4,005
19	2,149	4,005
20	2,155	4,006
21	2,155	3,999
22	2,151	4,007
23	2,155	4,005
24	2,155	4,005
25	2,155	4,009
26	2,155	4,001
27	2,149	4,006
28	2,155	4,005
29	2,151	4,009
30	2,155	4,005
31	2,155	4,007
32	2,155	4,005
33	2,155	4,009
34	2,151	4,006
35	2,155	4,007
36	2,149	4,005
37	2,151	4,006
38	2,155	4,009
39	2,155	4,005
40	2,155	3,999
41	2,149	4,001
42	2,155	4,005
43	2,151	4,009
44	2,155	4,005
45	2,155	4,001
46	2,149	4,007
47	2,155	4,009
48	2,151	3,999
49	2,151	4,007
50	2,155	4,001
Average	2,15	4,00
Cmk	6,44	10,44

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-1501	TERMINAL No. 端子品番	7116-4158
Common PN 共通品番	–	–	–
	–	–	

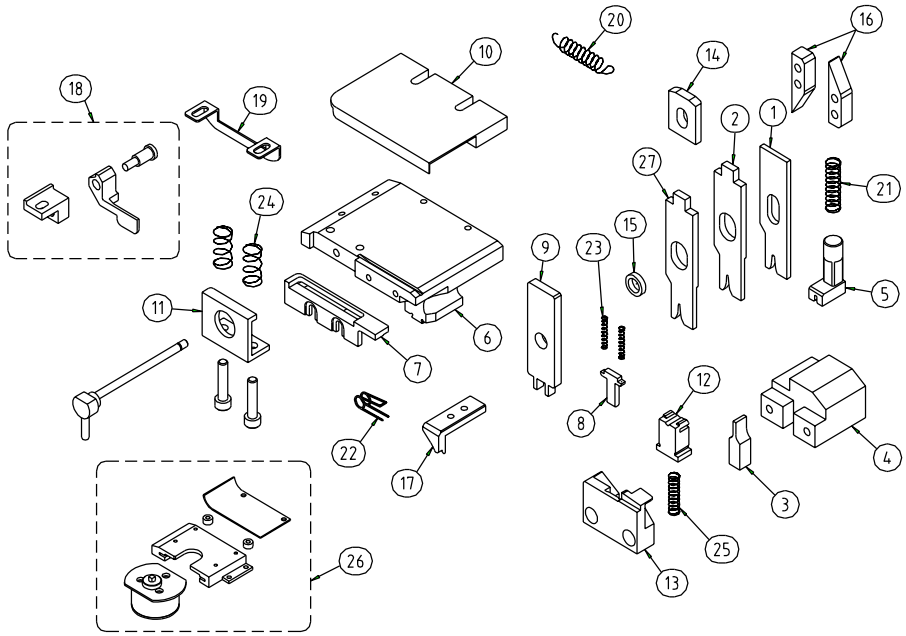

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4158XW		WIRE CRIMPER ワイヤークリンパー
2	7116-4158XI		INSULATION CRIMPER インシュレーションクリンパー
3	7116-4158XA		ANVIL アンビル
4	7116-4158XJE		ANVIL HOLDER アンビルホルダー
5	7116-4158XYY		SUPPORTING STOPPER サポーティングストッパー
6	7116-4158XYB		BASE ベース
7	7116-4158XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB
8	48A47016	001	WIRE HOLDER 電線押さえ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー
10	48A47020	A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ
12	48A47024	002	SHEARBLADE シャーブレード
13	48A47025	002	OUTER SHEARBLADE アウターシャーブレード
14	48A19007	016①	INSULATION ADJUSTING PIECE インシュレーション調整コマ
15	48A19019	033	BUSH ブッシュ
16	48A47014	005①	FEEDING CAM 送りカム

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
17	48A47013	001	FEEDING CLAW 送り爪
18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しスプリング
21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
	7116-4158XKP		BRACKET ブラケット
27			~~STABILIZER CRIMPER スタビライザークリンパー~~
〈OPTION オプション〉			
13	48A47025	101	OUTER SHEARBLADE アウターシャーブレード
14	48A47042	002	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
①	2008/8/1	020→016 001→005	QX7	C,Sato

APPRICATION POST 申請部署	
HIB	
DESIGNED DATE 設計日	
2008/3/27	
APPROVED 承認	DESIGNED 設計
T,Maki	C,Sato
2008/3/27	2008/3/27

ISSUED 発行

ISSUE
2018/03/22
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.