PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2410E001

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7116-5928 * SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-5928-02	*	**MXS**	**YSD-4514094411**	**MLER TRUCK BEV**

Applicable Terminals for this Tool:

7116-5928-02							

Anvil			Wire Crimper			Insulation Crimper		
7116-5928XA		(N)	7116-5928XW		(N)	7116-5928XI		(N)
CW (c)	1,58	*CW (i)* 2,20	*CW*	1,55		*CW*	2,20	


1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
					O - ok **X** - ng **NA** - not aplicable		
	The two sides of the insulation grips are in the correct position.	**O**	0~0.20mm 0.30~0.40mm	0 0.32		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**O**	0~0.20mm	0.04		The dimension of the cutting carrier is within the spec.**(*)**	**O**
	The lance height and shape are not deformed.	**NA**	0~0.20mm 0~0.20mm	0 -		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**O**	0.10~0.50mm	0.30		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	3º	0.3		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	0~0.40mm	0.09		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

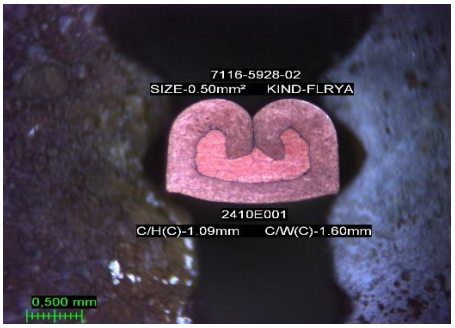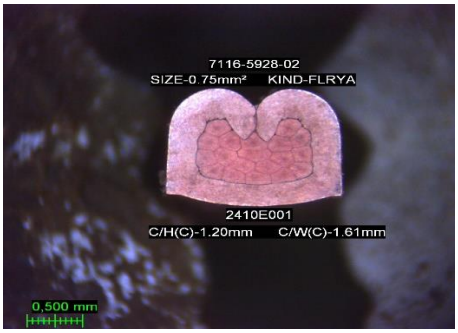2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,09	1,10	2,80
	+/-0.04		

	NOMINAL	AVERAGE	Cmk
mm	1,2	1,20	4,03
	+/-0.04		

REMARKS:

Aplicable wire range 0.50mm²~0.75mm².
Size 0.50mm² C/W(I)-2.06mm
Size 0.75mm² C/W(I)-2.17mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
Date: 2024/dez/17	Date: 2024/dez/17	Date: 2024/dez/16

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2410E001

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,5 mm²

Nominal Cr. Height:	1,09	1,75	mm
+/-	0,04	0,08	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,097	1,760
2	1,092	1,751
3	1,098	1,758
4	1,093	1,758
5	1,098	1,750
6	1,098	1,755
7	1,097	1,756
8	1,094	1,749
9	1,095	1,749
10	1,101	1,749
11	1,097	1,755
12	1,093	1,748
13	1,098	1,754
14	1,095	1,755
15	1,094	1,746
16	1,098	1,751
17	1,095	1,752
18	1,094	1,756
19	1,099	1,750
20	1,099	1,753
21	1,095	1,751
22	1,100	1,753
23	1,101	1,756
24	1,102	1,750
25	1,096	1,753
26	1,097	1,756
27	1,101	1,752
28	1,100	1,757
29	1,098	1,755
30	1,102	1,753
31	1,104	1,752
32	1,098	1,756
33	1,097	1,756
34	1,105	1,752
35	1,106	1,755
36	1,102	1,757
37	1,101	1,751
38	1,105	1,753
39	1,103	1,757
40	1,098	1,757
41	1,100	1,752
42	1,105	1,752
43	1,098	1,761
44	1,102	1,760
45	1,104	1,754
46	1,101	1,751
47	1,103	1,757
48	1,106	1,751
49	1,103	1,753
50	1,098	1,757
Average	1,10	1,75
Cmk	2,80	7,67

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,75 mm²

Nominal Cr. Height:	1,2	1,9	mm
+/-	0,04	0,08	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,198	1,905
2	1,207	1,899
3	1,200	1,905
4	1,198	1,900
5	1,204	1,899
6	1,200	1,906
7	1,201	1,906
8	1,202	1,907
9	1,196	1,911
10	1,199	1,911
11	1,202	1,903
12	1,196	1,907
13	1,201	1,910
14	1,202	1,903
15	1,198	1,900
16	1,196	1,907
17	1,200	1,909
18	1,201	1,912
19	1,195	1,904
20	1,200	1,900
21	1,202	1,906
22	1,199	1,908
23	1,199	1,900
24	1,202	1,896
25	1,201	1,906
26	1,197	1,908
27	1,201	1,896
28	1,199	1,894
29	1,195	1,906
30	1,195	1,907
31	1,203	1,897
32	1,201	1,905
33	1,194	1,907
34	1,193	1,903
35	1,198	1,896
36	1,203	1,906
37	1,202	1,908
38	1,194	1,899
39	1,199	1,905
40	1,201	1,908
41	1,194	1,911
42	1,193	1,901
43	1,198	1,899
44	1,196	1,910
45	1,193	1,903
46	1,200	1,908
47	1,201	1,909
48	1,196	1,907
49	1,196	1,904
50	1,199	1,908
Average	1,20	1,90
Cmk	4,03	5,53

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-5148	TERMINAL No. 端子品番	7116-5928
Common PN 共通品番	– – – – – –		

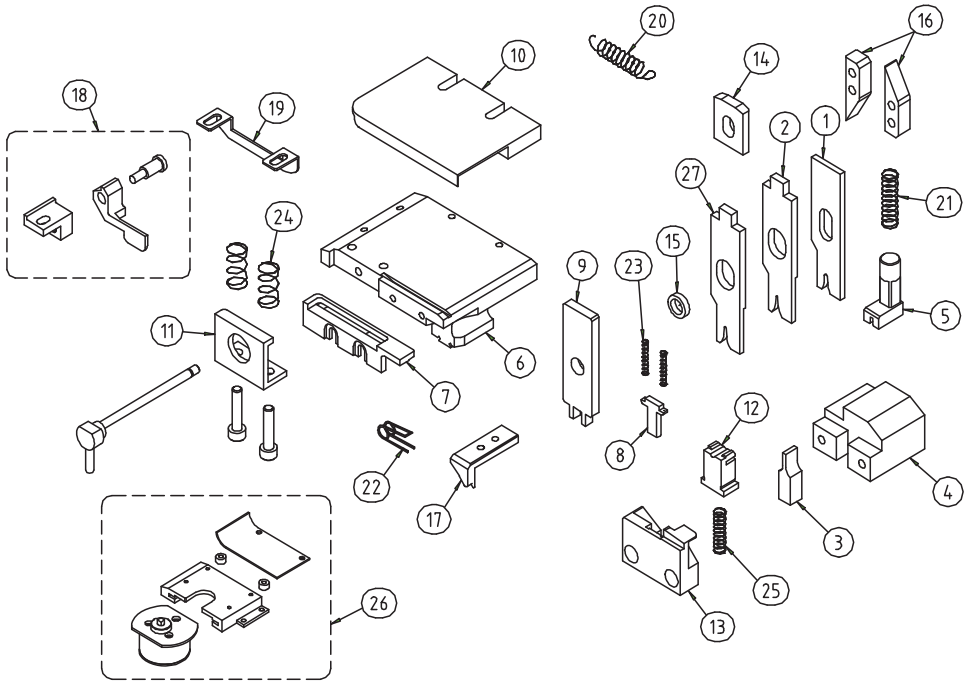

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-5928XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	①	FEEDING CLAW 送り爪
2	7116-5928XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-012 ①	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-5928XA		ANVIL アンビル	19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
4	7116-5928XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-5928XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-003	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-5928XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-5928XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074	-001 ①	TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
10	48A47020	-A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7116-5928XKP		BRACKET ブラケット
12	48A47024	-001	SHEARBLADE シャーブレード	27	~~7116-5928XQ~~		~~STABILIZER CRIMPER~~ ~~スタビライザークリンパー~~
13	48A47025	-002	OUTER SHEARBLADE アウターシャーブレード	〈OPTION オプション〉			
14	48A19007	-028 ①	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャーブレード
15	48A19019	-019	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-001	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計
①	2024/9/27	026→028, DELETED TYPE 001, 005→012,ADDED 001	C241043	H.HASEGAWA	T,Maki	S.Suzuki

APPRICATION POST
申請部署
TAP-B

DESIGNED DATE
設計日
2010/11/8

2010/11/8

REVISED

ISSUE
2024/10/16
YAZAKI PARTS CO.LTD
HAIBARA OFFICE

ISSUED
発行