PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2410E002

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7116-5928 * SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-5928-02	*	**MYS**	**YSD-4514094411**	**MLER TRUCK BEV**

Applicable Terminals for this Tool:

7116-5928-02							

Anvil			Wire Crimper			Insulation Crimper		
7116-5928XA		(N)	7116-5928XW		(N)	7116-5928XI		(N)
CW (c)	1,58	*CW (i)* 2,20	*CW*	1,55		*CW*	2,20	


1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
					O - ok **X** - ng **NA** - not aplicable		
	The two sides of the insulation grips are in the correct position.	**O**	0~0.20mm 0.30~0.40mm	0 0.36		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**O**	0~0.20mm	0.04		The dimension of the cutting carrier is within the spec.**(*)**	**O**
	The lance height and shape are not deformed.	**NA**	0~0.20mm 0~0.20mm	- 0.04		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**O**	0.10~0.50mm	0.33		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	3º	0.2		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	0~0.40mm	0.08		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

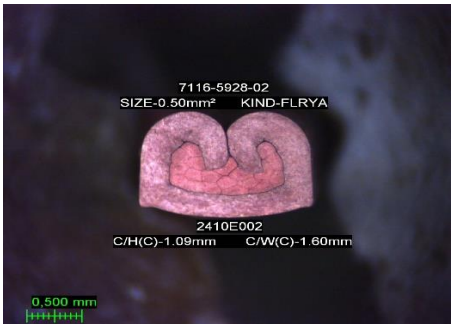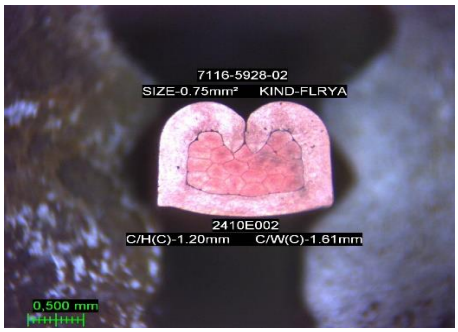2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk		NOMINAL	AVERAGE	Cmk
mm	1,09	1,10	2,82	mm	1,2	1,21	2,31
	+/-0.04				**+/-0.04**		

REMARKS:

Aplicable wire range 0.50mm²~0.75mm².
Size 0.50mm² C/W(I)-2.06mm
Size 0.75mm² C/W(I)-2.17mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
Date: 2025/jan/03	Date: 2024/dez/20	Date: 2024/dez/18

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2410E002

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,5 mm²

Nominal Cr. Height:	1,09	1,75	mm
+/-	0,04	0,08	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,095	1,754
2	1,095	1,755
3	1,100	1,754
4	1,093	1,756
5	1,099	1,749
6	1,104	1,752
7	1,099	1,749
8	1,095	1,749
9	1,101	1,751
10	1,102	1,755
11	1,095	1,749
12	1,099	1,747
13	1,101	1,755
14	1,097	1,750
15	1,102	1,751
16	1,099	1,757
17	1,096	1,751
18	1,095	1,747
19	1,101	1,753
20	1,102	1,760
21	1,097	1,749
22	1,102	1,750
23	1,102	1,756
24	1,095	1,750
25	1,103	1,750
26	1,102	1,754
27	1,098	1,760
28	1,096	1,752
29	1,104	1,753
30	1,104	1,760
31	1,104	1,755
32	1,100	1,752
33	1,098	1,751
34	1,105	1,762
35	1,105	1,759
36	1,099	1,752
37	1,104	1,758
38	1,106	1,754
39	1,104	1,762
40	1,099	1,755
41	1,102	1,763
42	1,104	1,755
43	1,105	1,754
44	1,103	1,761
45	1,098	1,764
46	1,104	1,758
47	1,106	1,753
48	1,100	1,758
49	1,100	1,764
50	1,104	1,758
Average	1,10	1,75
Cmk	2,82	5,55

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,75 mm²

Nominal Cr. Height:	1,2	1,9	mm
+/-	0,04	0,08	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,209	1,909
2	1,211	1,907
3	1,206	1,910
4	1,206	1,910
5	1,201	1,902
6	1,201	1,904
7	1,208	1,906
8	1,210	1,901
9	1,205	1,902
10	1,201	1,906
11	1,207	1,909
12	1,201	1,902
13	1,205	1,906
14	1,205	1,909
15	1,207	1,910
16	1,209	1,905
17	1,204	1,908
18	1,201	1,908
19	1,206	1,902
20	1,208	1,904
21	1,203	1,906
22	1,204	1,909
23	1,209	1,904
24	1,209	1,903
25	1,209	1,903
26	1,210	1,909
27	1,213	1,904
28	1,213	1,901
29	1,207	1,901
30	1,208	1,907
31	1,212	1,901
32	1,201	1,899
33	1,211	1,901
34	1,210	1,907
35	1,201	1,910
36	1,210	1,905
37	1,210	1,901
38	1,215	1,908
39	1,218	1,910
40	1,209	1,911
41	1,216	1,901
42	1,218	1,908
43	1,212	1,910
44	1,209	1,906
45	1,213	1,899
46	1,201	1,905
47	1,209	1,907
48	1,211	1,906
49	1,216	1,901
50	1,205	1,905
Average	1,21	1,91
Cmk	2,31	7,32

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-5148	TERMINAL No. 端子品番	7116-5928
Common PN 共通品番	– – – – – –		

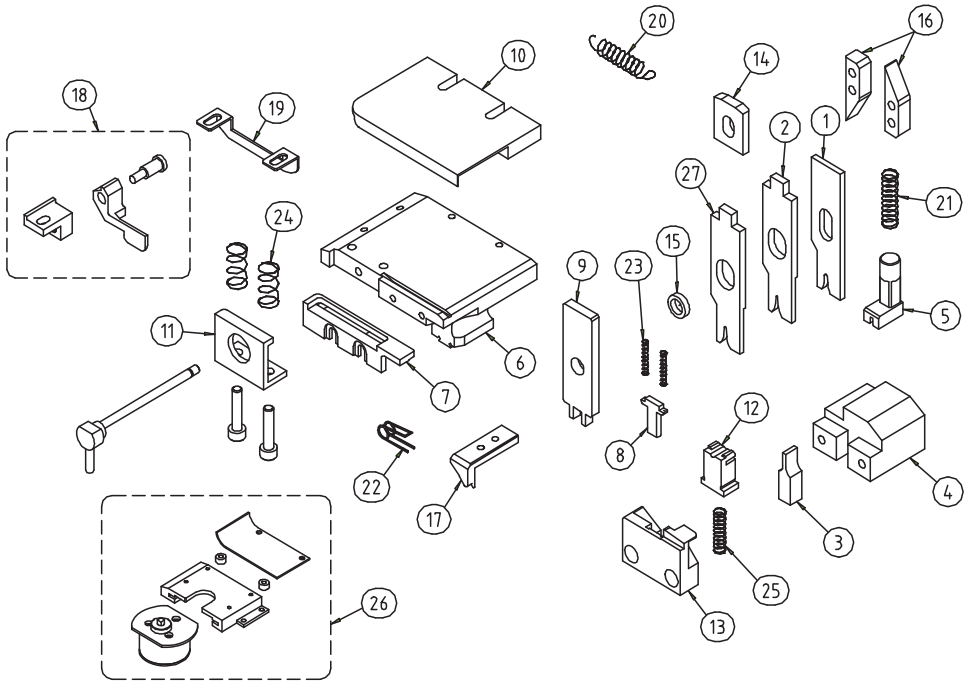

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-5928XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	①	FEEDING CLAW 送り爪
2	7116-5928XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-012 ①	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-5928XA		ANVIL アンビル	19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
4	7116-5928XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-5928XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-003	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-5928XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-5928XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074	-001 ①	TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
10	48A47020	-A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7116-5928XKP		BRACKET ブラケット
12	48A47024	-001	SHEARBLADE シャーブレード	27	~~7116-5928XQ~~		~~STABILIZER CRIMPER~~ ~~スタビライザークリンパー~~
13	48A47025	-002	OUTER SHEARBLADE アウターシャーブレード	〈OPTION オプション〉			
14	48A19007	-028 ①	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャーブレード
15	48A19019	-019	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-001	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計
①	2024/9/27	026→028, DELETED TYPE 001, 005→012,ADDED 001	C241043	H.HASEGAWA	T,Maki	S.Suzuki

APPRICATION POST
申請部署
TAP-B

DESIGNED DATE
設計日
2010/11/8

2010/11/8

REVISED

ISSUE
2024/10/16
YAZAKI PARTS CO.LTD
HAIBARA OFFICE

ISSUED
発行