PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2504E017

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71151873 * SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7115-1873-02	*	MXK	4514204126	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7115-1873-02	7115-1873-04		

Anvil			Wire Crimper			Insulation Crimper		
71151873XA		(A1)	71151873XW		(1)	71151973XI		(A1)
CW (c)	1.92	*CW (i)* 2.30	*CW*	1.90		*CW*	2.30	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.3 mm 0.13 - 0.76 mm	0.11 0.55		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.25 mm	0.19		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 5 ° 0 - 5 °	0.07		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0 - 0.8 mm	0.24		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 5 °	1.08		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 5 °	0.11		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable

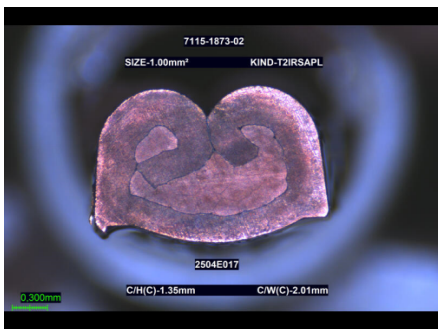
(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.35	1.35	6.28
	+/- **0.05**		

	NOMINAL	AVERAGE	Cmk
mm			
	+/-		

REMARKS:

Applicable wire range 1.00mm²
The wire size 0,50/0,75 mm² is not recommended
due to the micro-cut conditions
The micro-cut conditions are similar to the

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº44	PREPARED (Operator) nº19477
		Renato Tavares
Date: 28/05/2025	Date: 27/05/2025	Date: 26/05/2025

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

2504E017

LOWER WIRE KIND & SIZE

C/W(l): mm

Wire kind: T2IRSAPL

Wire size: 1.00 mm²

Nominal Cr. Height:	1.35	2.3	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.357	2.301
2	1.354	2.304
3	1.351	2.306
4	1.353	2.309
5	1.354	2.307
6	1.355	2.305
7	1.351	2.303
8	1.354	2.306
9	1.359	2.307
10	1.356	2.309
11	1.354	2.306
12	1.352	2.305
13	1.354	2.300
14	1.355	2.303
15	1.356	2.304
16	1.352	2.305
17	1.355	2.310
18	1.357	2.307
19	1.361	2.305
20	1.358	2.303
21	1.357	2.298
22	1.355	2.300
23	1.353	2.302
24	1.351	2.304
25	1.353	2.306
26	1.356	2.311
27	1.353	2.308
28	1.354	2.307
29	1.355	2.305
30	1.352	2.307
31	1.351	2.305
32	1.354	2.302
33	1.357	2.299
34	1.355	2.302
35	1.353	2.306
36	1.351	2.305
37	1.352	2.301
38	1.355	2.304
39	1.352	2.306
40	1.351	2.310
41	1.354	2.306
42	1.355	2.304
43	1.353	2.303
44	1.351	2.302
45	1.354	2.301
46	1.351	2.304
47	1.348	2.301
48	1.350	2.299
49	1.353	2.302
50	1.356	2.303
Average	1.35	2.30
Cmk	6.28	10.75

UPPER WIRE KIND & SIZE

C/W(l): mm

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		


Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1193	TERMINAL No. 端子品番	7115-1873
共通品番	- / -	- / -	- / -

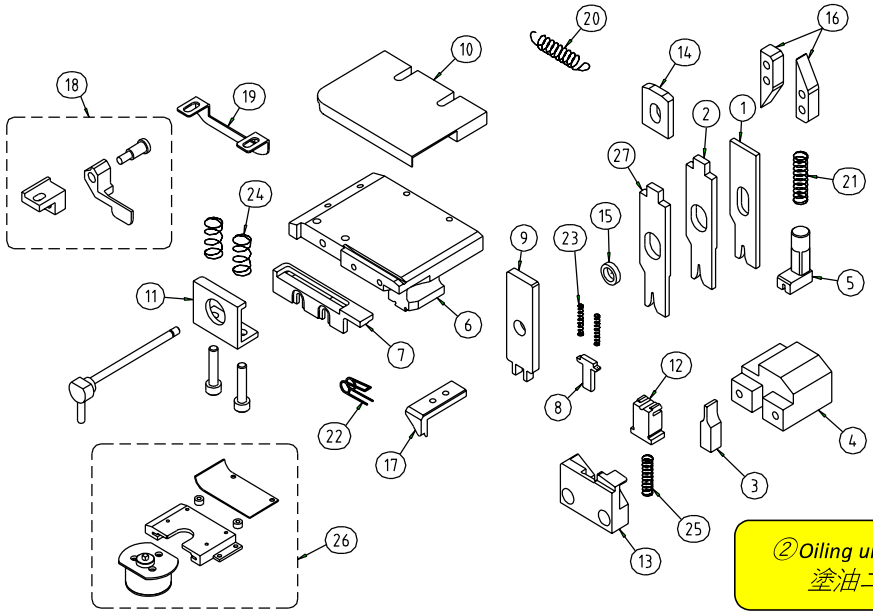Rev.1



②Oiling unit standard equipment.
塗油ユニット標準装備

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7115-1873XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ
2	7115-1873XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ
3	7115-1873XA		ANVIL ｱﾝﾋﾞﾙ
4	7115-1873XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ
5	7115-1873XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ
6	7115-1873XYB		BASE ﾍﾞｰｽ
7	7115-1873XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB
8	48A47016	001	WIRE HOLDER 電線押さえ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ
10	48A47020	A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ
12	48A47024	001	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ
13	48A47025	001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A19007	028 ①	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ
15	48A19019	020	BUSH ﾌﾞｯｼｭ
16	48A47014	001	FEEDING CAM 送りｶﾑ
17	48A47013	001	FEEDING CLAW 送り爪
18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
19	48A19047	001 ①	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
	7115-1873XKP		BRACKET ﾌﾞﾗｹｯﾄ
27			~~STABILIZER CRIMPER~~ ~~ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
〈OPTIONｵﾌﾟｼｮﾝ〉			
13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
②	11/17/2023	Oiling unit standard equipment	C23K032	H.KAMIYA
①	9/27/2007	027→028, 002→001	QX7	T,Suzuki

APPRICATION POST 申請部署	
HIB	
DESIGNED DATE 設計日	
8/27/2007	
APPROVED 承認	DESIGNED 設計
T,Maki	T,Suzuki
8/27/2007	8/27/2007

REVISED
ISSUE
11/22/2023
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED 発行