PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

# APPLICATOR VALIDATION REPORT

**(Spec. YEL-RP-02-0004)**

| Applicator Serial Nº |
|---|
| 2504E085 |

***TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71962322 Y2 SEQUENCE Nº*** 9

| Validation Terminal Nº | Accessory | Applicator Type | Purchasing Order Nº | Project / Model |
|---|---|---|---|---|
| 7196-2322-02 | * | MYK | 4514217128 | DAIMLER TRUCK - XVK84 |

**Applicable Terminals for this Tool:**

| 7196-2322-02 | | | | | |
|---|---|---|---|---|---|

| Anvil | | | Wire Crimper | | | Insulation Crimper | | |
|---|---|---|---|---|---|---|---|---|
| 7196-2322-00XA | | (N) | 7196-2322-00XW | | (N) | 7196-2322-00XI | | (N) |
| *CW (c)* | 1.04 | *CW (i)* 1.17 | *CW* | 1.04 | | *CW* | 1.17 | |

## 1 - VISUAL / MEASURED CHECK ITEMS


| | | | Spec. (*) | Value (**) | | | |
|---|---|---|---|---|---|---|---|
| | The two sides of the insulation grips are in the correct position. | O | 0.1 - 0.4 mm | 0.18 | | The Bell Mouth is within the spec. | O |
| | Not found any Bell Mouth in the insulation area. | O | 0 - 0.2 mm | 0.2 | | The dimension of the cutting carrier is within the spec. | O |
| | The lance height and shape are not deformed. | O | 0 - 1 °<br>0 - 1 ° | 0.3 | | Bend up and Bend down are within the criteria. | O |
| | Not found any burr in the cutting carrier. | O | 0.3 - 0.7 mm | 0.35 | | The exposed conductor is within the spec. | O |
| | Not found any crack in the terminal. | O | 0 - 3 ° | 1.5 | | The terminal is not bent sideways while looking from the top. | O |
| | The wire barrel is free from burrs. | O | 0 - 2 ° | 0.6 | | The body of the terminal is not twisted. | O |

**O** - ok **X** - ng **NA** - not aplicable

**(*)** - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

| **LOWER** WIRE KIND & SIZE | **UPPER** WIRE KIND & SIZE |
|---|---|

## 2 - MICRO CUT SAMPLES

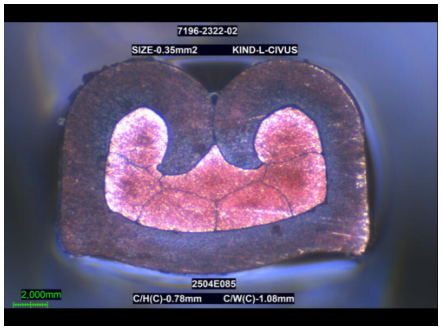


## 3 - CRIMPING HEIGHT STABILITY

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | 0.78 | 0.78 | 2.13 |
| | +/- **0.02** | | |

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | | | |
| | +/- | | |

**REMARKS:**

Applicable wire range- 0.35mm2

**EVALUATION DECISION**

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

| APPROVED (Section Chief) nº3485 | CHECKED (Operator) nº44 | PREPARED (Operator) nº2624 |
|---|---|---|
| Date: 13/06/2025 | Date: 13/06/2025 | Date: 13/06/2025 |

YAZAKI

PORTO TECHNICAL CENTRE

# APPLICATOR VALIDATION REPORT

**Applicator Serial N°**

2504E085

## LOWER WIRE KIND & SIZE

C/W(I): 1.27 mm

Wire kind: L-CIVUS

Wire size: 0.35 mm²

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | 0.78 | 1.3 | mm |
| +/- | 0.02 | 0.1 | mm |

| Sample number | Crimp height **WIRE** (mm) | Crimp height **INSULATION** (mm) |
|---|---|---|
| 1 | 0.781 | 1.314 |
| 2 | 0.778 | 1.310 |
| 3 | 0.781 | 1.312 |
| 4 | 0.780 | 1.315 |
| 5 | 0.782 | 1.308 |
| 6 | 0.779 | 1.312 |
| 7 | 0.780 | 1.304 |
| 8 | 0.778 | 1.311 |
| 9 | 0.781 | 1.306 |
| 10 | 0.781 | 1.307 |
| 11 | 0.781 | 1.309 |
| 12 | 0.783 | 1.313 |
| 13 | 0.777 | 1.309 |
| 14 | 0.778 | 1.308 |
| 15 | 0.776 | 1.314 |
| 16 | 0.776 | 1.303 |
| 17 | 0.777 | 1.308 |
| 18 | 0.783 | 1.309 |
| 19 | 0.776 | 1.302 |
| 20 | 0.775 | 1.316 |
| 21 | 0.776 | 1.310 |
| 22 | 0.782 | 1.311 |
| 23 | 0.780 | 1.303 |
| 24 | 0.777 | 1.307 |
| 25 | 0.778 | 1.302 |
| 26 | 0.775 | 1.301 |
| 27 | 0.779 | 1.311 |
| 28 | 0.775 | 1.307 |
| 29 | 0.778 | 1.317 |
| 30 | 0.779 | 1.309 |
| 31 | 0.776 | 1.310 |
| 32 | 0.778 | 1.310 |
| 33 | 0.777 | 1.319 |
| 34 | 0.779 | 1.307 |
| 35 | 0.774 | 1.322 |
| 36 | 0.779 | 1.309 |
| 37 | 0.776 | 1.304 |
| 38 | 0.779 | 1.317 |
| 39 | 0.780 | 1.315 |
| 40 | 0.782 | 1.317 |
| 41 | 0.776 | 1.319 |
| 42 | 0.779 | 1.310 |
| 43 | 0.782 | 1.311 |
| 44 | 0.781 | 1.306 |
| 45 | 0.777 | 1.306 |
| 46 | 0.779 | 1.302 |
| 47 | 0.780 | 1.309 |
| 48 | 0.789 | 1.317 |
| 49 | 0.777 | 1.311 |
| 50 | 0.788 | 1.316 |
| Average | 0.78 | 1.31 |
| Cmk | 2.13 | 6.06 |

## UPPER WIRE KIND & SIZE

C/W(I): mm

Wire kind: NA + NA

Wire size: NA + NA mm²

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | NA | NA | mm |
| +/- | NA | NA | mm |


| Sample number | Crimp height **WIRE** (mm) | Crimp height **INSULATION** (mm) |
|---|---|---|
| 1 | | |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |
| 7 | | |
| 8 | | |
| 9 | | |
| 10 | | |
| 11 | | |
| 12 | | |
| 13 | | |
| 14 | | |
| 15 | | |
| 16 | | |
| 17 | | |
| 18 | | |
| 19 | | |
| 20 | | |
| 21 | | |
| 22 | | |
| 23 | | |
| 24 | | |
| 25 | | |
| 26 | | |
| 27 | | |
| 28 | | |
| 29 | | |
| 30 | | |
| 31 | | |
| 32 | | |
| 33 | | |
| 34 | | |
| 35 | | |
| 36 | | |
| 37 | | |
| 38 | | |
| 39 | | |
| 40 | | |
| 41 | | |
| 42 | | |
| 43 | | |
| 44 | | |
| 45 | | |
| 46 | | |
| 47 | | |
| 48 | | |
| 49 | | |
| 50 | | |
| Average | | |
| Cmk | | |

**Acceptance criteria: Cmk >= 2**

**END**

# 04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

| PRODUCT No. 製品番号 | C0100-8189 | TERMINAL No. 端子品番 | 7196-2322Y2 |
|---|---|---|---|
| 共通品番 | - - | - - | - - |

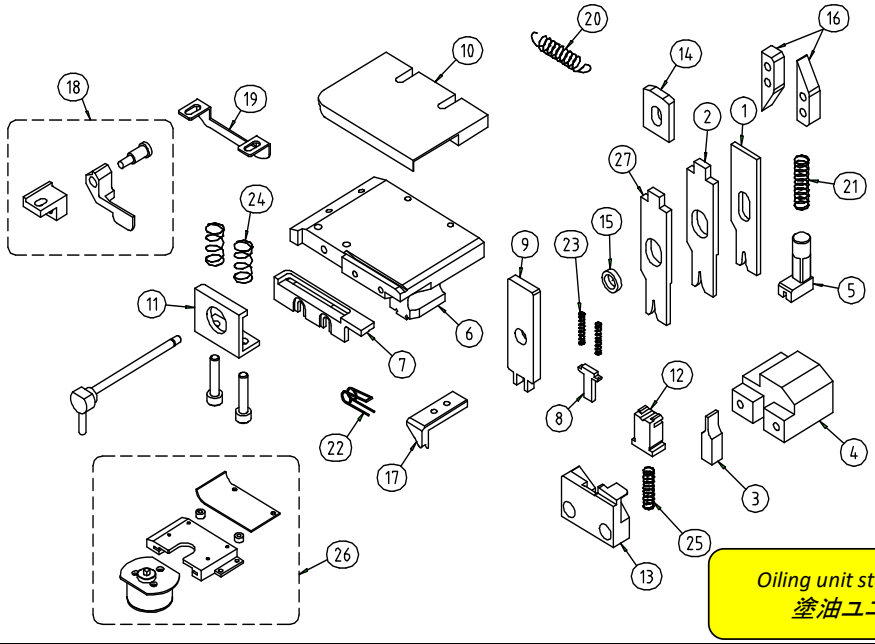


| No, | PARTS No, 部品番号 | DRW No, 図番 | PARTS NAME 部品名称 |
|---|---|---|---|
| 1 | 7196-2322-00XW | | WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ |
| 2 | 7196-2322-00XI | | INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ |
| 3 | 7196-2322-00XA | | ANVIL ｱﾝﾋﾞﾙ |
| 4 | 7196-1559XJE | | ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ |
| 5 | 7196-1559XYY | | SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ |
| 6 | 7196-1559XYB | | BASE ﾍﾞｰｽ |
| 7 | 7196-1559XYH | | TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB |
| 8 | 48A47016 | -001 | WIRE HOLDER 電線押さえ |
| 9 | 48A47017 | -002 | CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ |
| 10 | 48A47020 | -A03 | TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA |
| 11 | 48A47022 | -001 | TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ |
| 12 | 7196-2322XS | | SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ |
| 13 | 7196-2322XP | | OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ |
| 14 | 48A19007 | -027 | INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ |
| 15 | 48A19019 | -017 | BUSH ﾌﾞｯｼｭ |
| 16 | 48A47014 | -003 | FEEDING CAM 送りｶﾑ |

| No, | PARTS No, 部品番号 | DRW No, 図番 | PARTS NAME 部品名称 |
|---|---|---|---|
| 17 | 48A47013 | -003 | FEEDING CLAW 送り爪 |
| 18 | 48A19100 | -005 | WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ |
| 19 | 48A19047 | -002 | TERMINAL SCRAPER 端子掻き落とし |
| 20 | 48A47031 | | RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ |
| 21 | 48A47032 | -002 | SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ |
| 22 | 48A19017 | -003 | FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ |
| 23 | 48A19023 | -002 | WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ |
| 24 | 48A19074 | | TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ |
| 25 | 48A19050 | | SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ |
| 26 | 48A19999 | | TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ |
| | 7196-2322XKP | | BRACKET ﾌﾞﾗｹｯﾄ |
| 27 | - | | ~~STABILIZER CRIMPER スタビライザークリンパー~~ |
| 〈OPTION オプション〉 | | | |
| 13 | 48A47025 | -106 | OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ |
| 14 | 48A47042 | -001 | INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ) |

| MARK 記号 | DATE 日付 | REVISION RECORD 改訂記録 | No. 番号 | CHECKED 点検 |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| APPRICATION POST 申請部署 | |
|---|---|
| YAPT | |
| DESIGNED DATE 設計日 | |
| 04/10/2022 | |
| APPROVED 承認 | DESIGNED 設計 |
| H.Hasegawa | C.Almeida |
| 04/10/2022 | 04/10/2022 |

ISSUED 発行