PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2504E086

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71962322 Y2 SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7196-2322-02	*	MYK	4514217128	DAIMLER TRUCK - XVK84

Applicable Terminals for this Tool:

7196-2322-02							

Anvil			Wire Crimper			Insulation Crimper		
7196-2322-00XA		(N)	7196-2322-00XW		(N)	7196-2322-00XI		(N)
CW (c)	1.04	*CW (i)* 1.17	*CW*	1.04		*CW*	1.17	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0.1 - 0.4 mm	0.19		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.2 mm	0.03		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 1 ° 0 - 1 °	0.7		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.3 - 0.7 mm	0.37		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	0.6		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 2 °	0.7		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.78	0.78	2.37
	+/- **0.02**		

	NOMINAL	AVERAGE	Cmk
mm			
	+/-		

REMARKS:

Applicable wire range-0.35~0.35mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº44	PREPARED (Operator) nº2624
Date: 09/06/2025	Date: 06/06/2025	Date: 06/06/2025

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°
2504E086

LOWER WIRE KIND & SIZE

C/W(I): 1.26 mm

Wire kind: L-CIVUS

Wire size: 0.35 mm²

Nominal Cr. Height:	0.78	1.3	mm
+/-	0.02	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	0.786	1.305
2	0.779	1.301
3	0.772	1.302
4	0.782	1.305
5	0.779	1.306
6	0.780	1.310
7	0.781	1.302
8	0.779	1.301
9	0.784	1.310
10	0.781	1.310
11	0.778	1.303
12	0.778	1.304
13	0.783	1.302
14	0.779	1.311
15	0.777	1.301
16	0.782	1.299
17	0.776	1.308
18	0.778	1.300
19	0.782	1.304
20	0.778	1.301
21	0.783	1.306
22	0.776	1.310
23	0.777	1.306
24	0.780	1.309
25	0.780	1.312
26	0.779	1.314
27	0.777	1.313
28	0.780	1.311
29	0.781	1.306
30	0.782	1.308
31	0.779	1.302
32	0.779	1.318
33	0.780	1.307
34	0.778	1.309
35	0.781	1.316
36	0.776	1.313
37	0.778	1.314
38	0.776	1.304
39	0.774	1.311
40	0.787	1.312
41	0.779	1.313
42	0.780	1.313
43	0.781	1.312
44	0.779	1.312
45	0.780	1.308
46	0.780	1.301
47	0.782	1.319
48	0.783	1.302
49	0.783	1.296
50	0.779	1.306
Average	0.78	1.31
Cmk	2.37	5.90

UPPER WIRE KIND & SIZE

C/W(I): mm

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-8189	TERMINAL No. 端子品番	7196-2322Y2
共通品番	- -	- -	- -

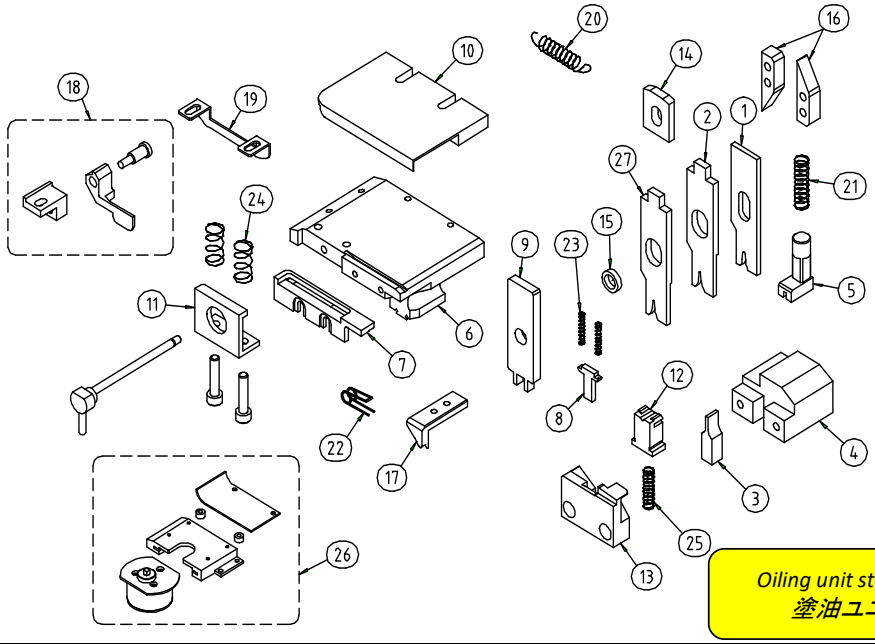

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7196-2322-00XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ
2	7196-2322-00XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ
3	7196-2322-00XA		ANVIL ｱﾝﾋﾞﾙ
4	7196-1559XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ
5	7196-1559XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ
6	7196-1559XYB		BASE ﾍﾞｰｽ
7	7196-1559XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB
8	48A47016	-001	WIRE HOLDER 電線押さえ
9	48A47017	-002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ
10	48A47020	-A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ
12	7196-2322XS		SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ
13	7196-2322XP		OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
14	48A19007	-027	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ
15	48A19019	-017	BUSH ﾌﾞｯｼｭ
16	48A47014	-003	FEEDING CAM 送りｶﾑ

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
17	48A47013	-003	FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
21	48A47032	-002	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
	7196-2322XKP		BRACKET ﾌﾞﾗｹｯﾄ
27	-		~~STABILIZER CRIMPER スタビライザークリンパー~~
〈OPTION オプション〉			
13	48A47025	-106	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署	
YAPT	
DESIGNED DATE 設計日	
04/10/2022	
APPROVED 承認	DESIGNED 設計
H.Hasegawa	C.Almeida
04/10/2022	04/10/2022

ISSUED 発行