PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2606E017

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71144446 * SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7114-4446-02	7157-3345-40	MXD	4514417508	DAIMLER TRUCK - XVK81/D1

Applicable Terminals for this Tool:

7114-4446-02			

Anvil			Wire Crimper			Insulation Crimper		
7114-4446XAD		(N)	7114-4446XW		(1)	7114-4446XID		(1)
CW (c)	1.97	*CW (i)* 3.20	*CW*	1.95		*CW*	3.20	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.3 mm 0.2 - 0.6 mm	0.18 0.45		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.5 mm	0.38		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.2 mm 0 - 0.2 mm	0.1		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 0.5 mm	0.42		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	1.37		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.4 mm	0.07		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable

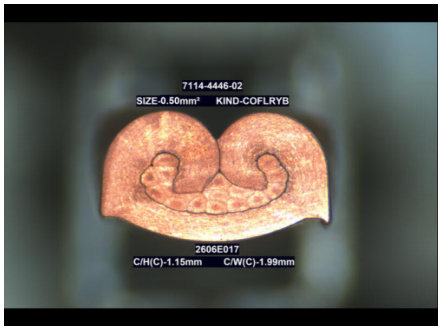
(*) - Specified on Crimping Spec.

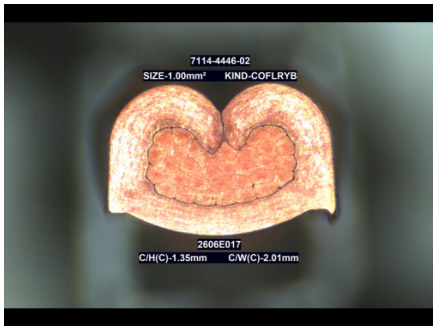
(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.15	1.15	4.00
	+/- 0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.35	1.35	4.01
	+/- 0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº2624	PREPARED (Operator) nº18388
Date: 04/08/2026	Date: 04/08/2026	Date: 04/08/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

2606E017

LOWER WIRE KIND & SIZE

C/W(I): 3.13 mm

Wire kind: COFLRYB

Wire size: 0.50 mm²

Nominal Cr. Height:	1.15	3	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.161	3.014
2	1.166	3.011
3	1.158	3.012
4	1.156	3.014
5	1.159	3.011
6	1.152	3.005
7	1.150	3.010
8	1.157	3.013
9	1.151	3.003
10	1.156	3.006
11	1.150	3.002
12	1.151	3.013
13	1.148	3.012
14	1.149	3.003
15	1.154	3.000
16	1.154	3.012
17	1.155	3.005
18	1.150	3.002
19	1.155	3.004
20	1.151	3.010
21	1.148	3.005
22	1.153	3.002
23	1.154	3.010
24	1.149	3.003
25	1.151	3.009
26	1.152	3.012
27	1.152	3.005
28	1.155	3.014
29	1.151	3.002
30	1.151	3.006
31	1.157	3.011
32	1.159	3.003
33	1.153	3.010
34	1.151	3.010
35	1.157	3.004
36	1.153	3.000
37	1.158	3.007
38	1.160	3.000
39	1.155	3.005
40	1.153	2.999
41	1.159	3.006
42	1.157	3.004
43	1.153	3.002
44	1.154	3.009
45	1.161	3.004
46	1.157	3.012
47	1.151	3.003
48	1.159	3.010
49	1.152	3.006
50	1.154	3.011
Average	1.15	3.01
Cmk	4.00	7.13

UPPER WIRE KIND & SIZE

C/W(I): 3.28 mm

Wire kind: COFLRYB

Wire size: 1.00 mm²

Nominal Cr. Height:	1.35	3.2	mm
+/-	0.05	0.1	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.357	3.203
2	1.352	3.205
3	1.357	3.196
4	1.356	3.197
5	1.354	3.205
6	1.356	3.202
7	1.358	3.208
8	1.351	3.199
9	1.356	3.201
10	1.355	3.210
11	1.357	3.198
12	1.356	3.200
13	1.359	3.208
14	1.359	3.200
15	1.352	3.207
16	1.351	3.197
17	1.357	3.204
18	1.358	3.201
19	1.351	3.196
20	1.360	3.201
21	1.359	3.198
22	1.351	3.200
23	1.348	3.202
24	1.354	3.203
25	1.358	3.199
26	1.349	3.203
27	1.353	3.211
28	1.359	3.199
29	1.356	3.205
30	1.350	3.207
31	1.357	3.206
32	1.360	3.202
33	1.354	3.205
34	1.353	3.199
35	1.360	3.207
36	1.360	3.203
37	1.351	3.208
38	1.359	3.199
39	1.352	3.212
40	1.348	3.212
41	1.350	3.206
42	1.357	3.206
43	1.348	3.199
44	1.348	3.211
45	1.353	3.204
46	1.358	3.202
47	1.358	3.201
48	1.352	3.211
49	1.348	3.203
50	1.352	3.209
Average	1.35	3.20
Cmk	4.01	7.34

Acceptance criteria: Cmk >= 2

END

04 アプリケーター 消耗部品表 ／04 APPLICATOR CONSUMABLE PARTS LIST

製品番号 PRODUCT No.	C0100-4126	端子品番 TERMINAL No.	7114-4446DD

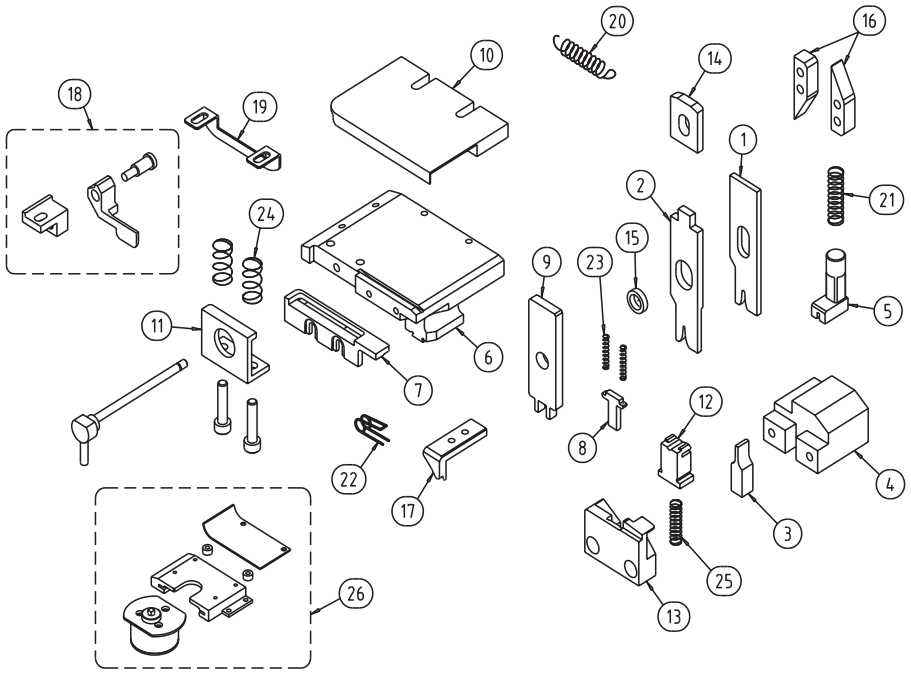

No.	部品番号 PARTS No.	図番 DRW. No.	部品名称 PARTS NAME
1	7114-4446XW		ワイヤークリンパー WIRE CRIMPER
2	7114-4446XID		インシュクリンパー INSULATION CRIMPER
3	7114-4446XAD		アンビル ANVIL
4	7114-4446DDXJE		アンビルホルダー ANVIL HOLDER
5	7114-4446DDXYY		サポーティングストッパー SUPPORTING STOPPER
6	7114-4446DDXYB		ベース BASE
7	7114-4446DDXYH		ターミナルガイドプレートB TERMINAL GUIDE PLATE B
8	48A47016	101 ②	電線押さえ WIRE HOLDER
9	48A47017	103 ②	切断ポンチ兼電線押さえホルダー CUTTING PUNCH & WIRE HOLDER
10	48A47020	A03	ターミナルガイドプレートA TERMINAL GUIDE PLATE A
11	48A47022	001 ①	ターミナル押さえ TERMINAL HOLDER
12	48A19049	018 ②	シャーブレード SHEARBLADE
13	48A47025	006|102 ②	アウターシャーブレード OUTER SHEARBLADE
14	48A19007	021 ①	インシュ調整コマ INSULATION ADJUSTING PIECE
15	48A19019	023	ブッシュ BUSH

No.	部品番号 PARTS No.	図番 DRW. No.	部品名称 PARTS NAME
16	48A47014	001	送りカム FEEDING CAM
17	48A47013		送り爪 FEEDING CLAW
18	48A19100	005	電線ストッパーAssy WIRE STOPPER Assy
19	48A19047	001	端子掻き落とし TERMINAL SCRAPER
20	48A47031		戻しスプリング RETURN SPRING
21	48A47032	001	サポーティングストッパースプリング SUPPORTING STOPPER SPRING
22	48A19017	003	送り爪スプリング FEEDING CLAW SPRING
23	48A19023	001	電線押さえスプリング WIRE HOLDER SPRING
24	48A19074		ターミナル押さえスプリング TERMINAL HOLDER SPRING
25	48A19050		シャーブレードスプリング SHEARBLADE SPRING
26	48A47999		ターミナル塗油ユニット TERMINAL OIL UNIT
27	7114-4446DDXKP		ブラケット BRACKET
〈オプション OPTION〉			
14	48A47042	-001 ①	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK	DATE	REVISION RECORD	No.	CHECKED
②	9/13/2016	SHEARBLADE 002→018 OUTER SHEARBLADE 003→006	161-010	Y.Nakamura
↓	↓	WIRE HOLDER 002→101 CUTTING PUNCH & WIRE HOLDER 003→103	↓	↓
①	11/5/2007	CHANGED No.	QX7	T,Suzuki

APPRICATION POST	
QX7	
DESIGNED DATE	
2006/12/4	
APPROVED	DESIGNED
Hiraguchi	Yagi
2006/12/4	2006/12/4

ISSUE
1/8/2018
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED MARK