PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2606E018

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71125087 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7112-5087-08	*	MXK	4514417508	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7112-5087-08			







Anvil		
7112-5087XA		(N)
CW (c) 1.32	*CW (i)* 1.85	

Wire Crimper		
7112-5087XW		(1)
CW 1.30		

Insulation Crimper		
7112-5087XI		(1)
CW 1.85		

1 - VISUAL / MEASURED CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.4 mm 0.1 - 0.5 mm	0.3 0.45		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.1		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 3 ° 0 - 3 °	2		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 0.5 mm	0.28		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 5 °	1.2		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 3 °	1.5		The body of the terminal is not twisted.	O

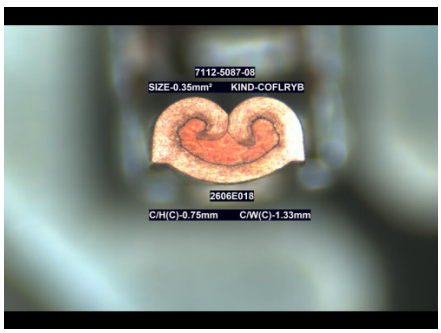
(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.75	0.75	2.87
	+/- **0.03**		

	NOMINAL	AVERAGE	Cmk
mm	0.87	0.87	3.44
	+/- **0.03**		

REMARKS:

Aplicable wire range 0.20mm²~0.60mm².
Section 0.22mm² not prepared due the miss wire samples.

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº2988
Date: 27/07/2026	Date: 27/07/2026	Date: 24/07/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

2606E018

LOWER WIRE KIND & SIZE

C/W(I): 1.77 mm

Wire kind: COFLRYB

Wire size: 0.35 mm²

Nominal Cr. Height:	0.75	1.45	mm
+/-	0.03	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	0.752	1.458
2	0.750	1.460
3	0.748	1.453
4	0.752	1.460
5	0.748	1.459
6	0.747	1.459
7	0.750	1.449
8	0.749	1.459
9	0.746	1.451
10	0.750	1.458
11	0.751	1.452
12	0.752	1.460
13	0.748	1.453
14	0.751	1.452
15	0.751	1.458
16	0.746	1.450
17	0.752	1.458
18	0.753	1.450
19	0.747	1.456
20	0.752	1.460
21	0.754	1.451
22	0.748	1.459
23	0.753	1.458
24	0.749	1.450
25	0.753	1.460
26	0.754	1.449
27	0.755	1.458
28	0.754	1.457
29	0.752	1.453
30	0.750	1.460
31	0.754	1.452
32	0.751	1.459
33	0.756	1.453
34	0.755	1.458
35	0.751	1.449
36	0.756	1.455
37	0.755	1.447
38	0.755	1.456
39	0.751	1.448
40	0.756	1.449
41	0.757	1.450
42	0.751	1.463
43	0.753	1.460
44	0.757	1.454
45	0.753	1.452
46	0.753	1.458
47	0.761	1.449
48	0.752	1.462
49	0.757	1.453
50	0.758	1.453
Average	0.75	1.46
Cmk	2.87	7.33

UPPER WIRE KIND & SIZE

C/W(I): 1.77 mm

Wire kind: COFLRYB

Wire size: 0.50 mm²

Nominal Cr. Height:	0.87	1.75	mm
+/-	0.03	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	0.875	1.759
2	0.873	1.759
3	0.876	1.751
4	0.871	1.752
5	0.871	1.757
6	0.875	1.754
7	0.876	1.756
8	0.870	1.758
9	0.868	1.755
10	0.872	1.748
11	0.873	1.755
12	0.868	1.753
13	0.873	1.753
14	0.872	1.757
15	0.866	1.748
16	0.872	1.754
17	0.875	1.758
18	0.869	1.757
19	0.870	1.751
20	0.875	1.758
21	0.870	1.754
22	0.868	1.751
23	0.872	1.758
24	0.874	1.752
25	0.867	1.758
26	0.871	1.751
27	0.874	1.756
28	0.868	1.749
29	0.874	1.753
30	0.873	1.753
31	0.869	1.748
32	0.868	1.750
33	0.875	1.755
34	0.872	1.746
35	0.870	1.753
36	0.875	1.754
37	0.871	1.748
38	0.869	1.755
39	0.871	1.754
40	0.875	1.750
41	0.871	1.758
42	0.868	1.747
43	0.875	1.753
44	0.869	1.748
45	0.866	1.751
46	0.869	1.750
47	0.872	1.746
48	0.867	1.755
49	0.871	1.747
50	0.873	1.754
Average	0.87	1.75
Cmk	3.44	8.81


Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-0907	TERMINAL No. 端子品番	7112-5087

共通品番	7FY9-9212	–	–	–
	–	–		

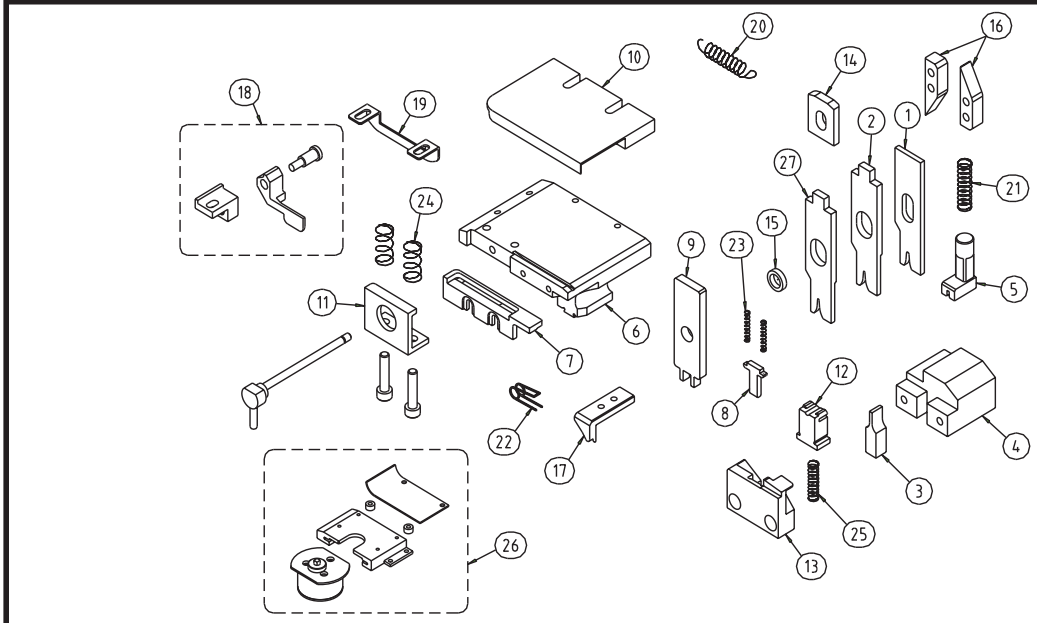

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7112-5087XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	001	FEEDING CLAW 送り爪
2	7112-5087XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7112-5087XA		ANVIL アンビル	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7112-5087XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7112-5087XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	002 ①	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7112-5087XYB		BASE ベース	22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
7	7112-5087XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	001	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレードスプリング
10	48A47020	A03	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ		7112-5087XKP		BRACKET ブラケット
12	48A47024	001	SHEARBLADE シャープレード	27			STABILIZER CRIMPER スタビライザークリンパー
13	48A47025	001	OUTER SHEARBLADE アウターシャープレード	〈OPTION オプション〉			
14	48A19007	025 ②	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	101	OUTER SHEARBLADE アウターシャープレード
15	48A19019	019	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	003	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
②	7/20/2007	026→025	QX7	T,Suzuki
①	6/29/2007	001→002	QX7	T,Suzuki

APPRICATION POST 申請部署		
PTC		
DESIGNED DATE 設計日		
2/9/2007		
APPROVED 承認	DESIGNED 設計	
K,Hiraguchi	T,Suzuki	
2/9/2007	2/9/2007	ISSUED 発行

ISSUE
2018/01/05
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.