PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2606E019

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71143342 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7114-3342-02	*	MXS	4514417508	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7114-3342-02			

Anvil		
7114-3342XA		(N)
CW (c) 2.05	CW (i) 2.54	

Wire Crimper		
7114-3342XW		(1)
CW 2.03		

Insulation Crimper		
7114-3342XI		(2)
CW 2.54		

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.3 mm 0.2 - 0.6 mm	0.23 0.46		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.5 mm	0.18		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.3 mm 0 - 0.3 mm	0.04		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 1 mm	0.56		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	0.9		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.5 mm	0.01		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec.


(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



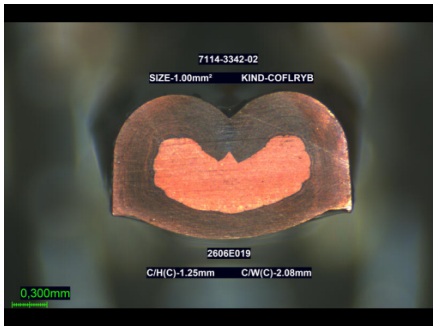

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.1	1.10	3.35
	+/- 0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.25	1.25	3.21
	+/- 0.05		

REMARKS:

Applicable wire range 0.50mm²~1.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº19147
Date: 28/07/2026	Date: 27/07/2026	Date: 27/07/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

2606E019

LOWER WIRE KIND & SIZE

C/W(l): 2.40 mm

Wire kind: COFLRYB

Wire size: 0.50 mm²

Nominal Cr. Height:	1.1	1.9	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.100	1.907
2	1.095	1.903
3	1.090	1.900
4	1.092	1.896
5	1.096	1.894
6	1.100	1.894
7	1.103	1.896
8	1.109	1.899
9	1.103	1.902
10	1.103	1.903
11	1.103	1.904
12	1.101	1.911
13	1.100	1.912
14	1.092	1.905
15	1.092	1.901
16	1.091	1.900
17	1.095	1.895
18	1.099	1.890
19	1.104	1.891
20	1.107	1.893
21	1.103	1.897
22	1.103	1.901
23	1.103	1.903
24	1.109	1.904
25	1.103	1.905
26	1.107	1.907
27	1.106	1.911
28	1.099	1.911
29	1.095	1.908
30	1.094	1.906
31	1.094	1.899
32	1.102	1.899
33	1.103	1.894
34	1.104	1.897
35	1.106	1.904
36	1.104	1.904
37	1.101	1.910
38	1.101	1.912
39	1.098	1.908
40	1.101	1.904
41	1.106	1.900
42	1.106	1.895
43	1.107	1.888
44	1.108	1.890
45	1.103	1.898
46	1.100	1.899
47	1.097	1.903
48	1.103	1.904
49	1.098	1.904
50	1.098	1.906
Average	1.10	1.90
Cmk	3.35	5.40

UPPER WIRE KIND & SIZE

C/W(l): 2.48 mm

Wire kind: COFLRYB

Wire size: 1.00 mm²

Nominal Cr. Height:	1.25	2.25	mm
+/-	0.05	0.1	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.244	2.256
2	1.246	2.255
3	1.249	2.257
4	1.250	2.258
5	1.256	2.263
6	1.257	2.264
7	1.258	2.263
8	1.247	2.262
9	1.248	2.258
10	1.244	2.258
11	1.250	2.248
12	1.254	2.245
13	1.254	2.248
14	1.257	2.255
15	1.258	2.258
16	1.251	2.259
17	1.251	2.263
18	1.261	2.265
19	1.253	2.265
20	1.253	2.253
21	1.246	2.253
22	1.248	2.251
23	1.253	2.246
24	1.251	2.244
25	1.251	2.240
26	1.251	2.253
27	1.264	2.253
28	1.258	2.257
29	1.257	2.257
30	1.251	2.258
31	1.249	2.259
32	1.248	2.262
33	1.250	2.262
34	1.255	2.256
35	1.259	2.251
36	1.251	2.249
37	1.263	2.246
38	1.263	2.246
39	1.259	2.252
40	1.251	2.257
41	1.251	2.257
42	1.250	2.259
43	1.245	2.261
44	1.245	2.263
45	1.251	2.261
46	1.253	2.258
47	1.254	2.252
48	1.255	2.255
49	1.255	2.252
50	1.250	2.255
Average	1.25	2.26
Cmk	3.21	5.30

Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-4292	TERMINAL No. 端子品番	7114-3342
共通品番	– / –	– / –	– / –

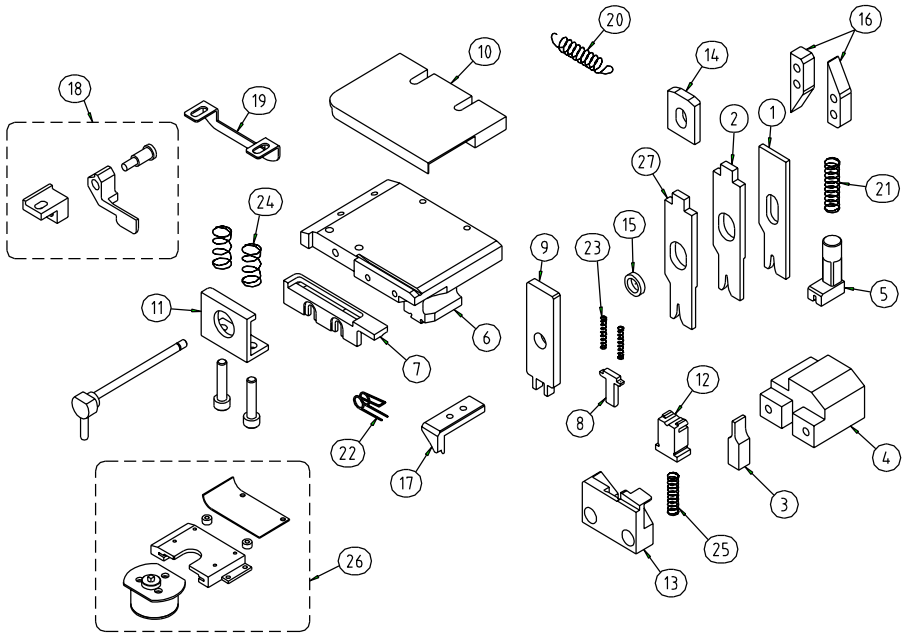

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7114-3342XW		WIRE CRIMPER ワイヤークリンパー
2	7114-3342XI		INSULATION CRIMPER インシュレーションクリンパー
3	7114-3342XA		ANVIL アンビル
4	7114-3342XJE		ANVIL HOLDER アンビルホルダー
5	7114-3342XYY		SUPPORTING STOPPER サポーティングストッパー
6	7114-3342XYB		BASE ベース
7	7114-3342XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB
8	48A47016	001	WIRE HOLDER 電線押さえ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー
10	48A47020	A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ
12	7114-3342XS ①		SHEARBLADE シャーブレード
13	7114-3342XP-A ①		OUTER SHEARBLADE アウターシャーブレード
14	48A19007	026 ②	INSULATION ADJUSTING PIECE インシュレーション調整コマ
15	48A19019	030	BUSH ブッシュ
16	48A47014	001	FEEDING CAM 送りカム

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
17	48A47013	001	FEEDING CLAW 送り爪
18	48A19100	005	WIRE STOPPER Assy 電線ストッパーアッシー
19	48A19047	002 ③	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しスプリング
21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
	7114-3342XKP		BRACKET ブラケット
27			~~STABILIZER CRIMPER スタビライザークリンパー~~
〈OPTION オプション〉			
13	7114-3342XP-B ①		OUTER SHEARBLADE アウターシャーブレード
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
③	12/13/2016	001→002	16L-032	FUKUDA
②	6/2/2008	037→026	QX7	C,Sato
①	1/18/2008	専用化 Making to exclusive use	08A-028	T,Suzuki

APPRICATION POST 申請部署	
HIB	
DESIGNED DATE 設計日	
8/20/2007	
APPROVED 承認	DESIGNED 設計
T,Maki	T,Suzuki
8/20/2007	8/20/2007

ISSUED 発行

ISSUE
1/2/2018
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.