PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2606E020

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71161045 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-1045-02	7157-3034-70	MXD	4514417508	DAIMLER TRUCK - BEV







Applicable Terminals for this Tool:

7116-1045-02			

Anvil		Wire Crimper		Insulation Crimper	
7116-1045XAD	(N)	7116-1045XW	(1)	7116-1045XID	(2)
CW (c) 2.27	CW (i) 4.10	CW 2.25		CW 4.10	

1 - VISUAL / MEASURED CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.4 mm 0.3 - 0.8 mm	0.24 0.56		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.09		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 5 ° 0 - 5 °	0.42		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.2 - 0.7 mm	0.36		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 5 °	0.5		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 5 mm	0.13		The body of the terminal is not twisted.	O

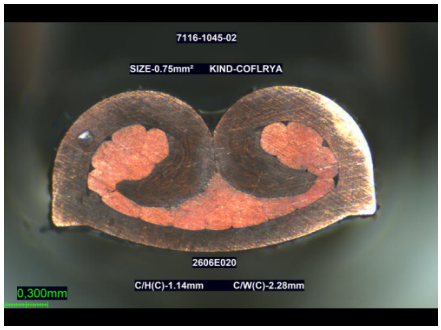
(*) - Specified on Crimping Spec.

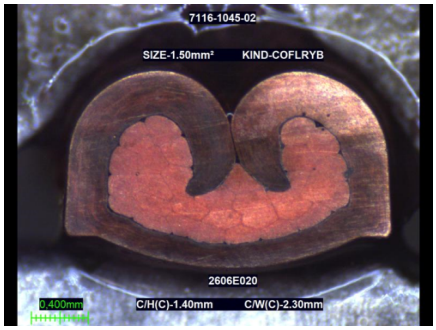
(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.14	1.15	4.79
	+/- 0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.4	1.41	3.46
	+/- 0.05		

REMARKS:

Applicable wire range-0.75~1.50mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº18388	PREPARED (Operator) nº2624
	HÉLDER ROCHA	
Date: 05/08/2026	Date: 05/08/2026	Date: 05/08/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2606E020

LOWER WIRE KIND & SIZE

C/W(I): 4.08 mm

Wire kind: COFLRYA

Wire size: 0.75 mm²

Nominal Cr. Height:	1.14	3.75	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.143	3.749
2	1.140	3.722
3	1.141	3.741
4	1.146	3.747
5	1.143	3.746
6	1.142	3.749
7	1.143	3.748
8	1.149	3.751
9	1.144	3.747
10	1.145	3.745
11	1.150	3.748
12	1.147	3.751
13	1.150	3.746
14	1.152	3.745
15	1.145	3.743
16	1.142	3.747
17	1.141	3.745
18	1.143	3.743
19	1.141	3.742
20	1.139	3.744
21	1.141	3.743
22	1.145	3.741
23	1.143	3.738
24	1.144	3.742
25	1.149	3.741
26	1.145	3.744
27	1.142	3.745
28	1.143	3.744
29	1.143	3.745
30	1.149	3.745
31	1.146	3.747
32	1.144	3.743
33	1.145	3.743
34	1.149	3.742
35	1.151	3.745
36	1.146	3.745
37	1.148	3.748
38	1.152	3.746
39	1.148	3.747
40	1.145	3.744
41	1.144	3.746
42	1.143	3.744
43	1.146	3.747
44	1.147	3.748
45	1.146	3.745
46	1.143	3.748
47	1.143	3.743
48	1.148	3.746
49	1.146	3.746
50	1.147	3.749
Average	1.15	3.74
Cmk	4.79	7.55

UPPER WIRE KIND & SIZE

C/W(I): 4.13 mm

Wire kind: COFLRYB

Wire size: 1.50 mm²

Nominal Cr. Height:	1.4	4	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.398	4.016
2	1.403	4.021
3	1.405	4.018
4	1.403	4.016
5	1.407	4.016
6	1.409	4.014
7	1.411	4.011
8	1.413	4.014
9	1.411	4.012
10	1.414	4.012
11	1.417	4.015
12	1.416	4.014
13	1.413	4.011
14	1.417	4.015
15	1.415	4.013
16	1.411	4.017
17	1.415	4.017
18	1.412	4.015
19	1.416	4.014
20	1.412	4.012
21	1.408	4.014
22	1.407	4.013
23	1.405	4.013
24	1.407	4.018
25	1.410	4.015
26	1.407	4.016
27	1.406	4.015
28	1.406	4.014
29	1.405	4.017
30	1.408	4.016
31	1.408	4.016
32	1.406	4.016
33	1.408	4.016
34	1.406	4.015
35	1.405	4.014
36	1.409	4.018
37	1.406	4.014
38	1.405	4.013
39	1.407	4.011
40	1.409	4.014
41	1.406	4.012
42	1.404	4.011
43	1.405	4.015
44	1.406	4.014
45	1.408	4.018
46	1.411	4.014
47	1.407	4.011
48	1.407	4.013
49	1.408	4.012
50	1.405	4.010
Average	1.41	4.01
Cmk	3.46	12.60

Acceptance criteria: Cmk >= 2


END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-0241	TERMINAL No. 端子品番	7116-1045DD

Common PN 共通品番	1/2517/54	–	–	–
	–	–		

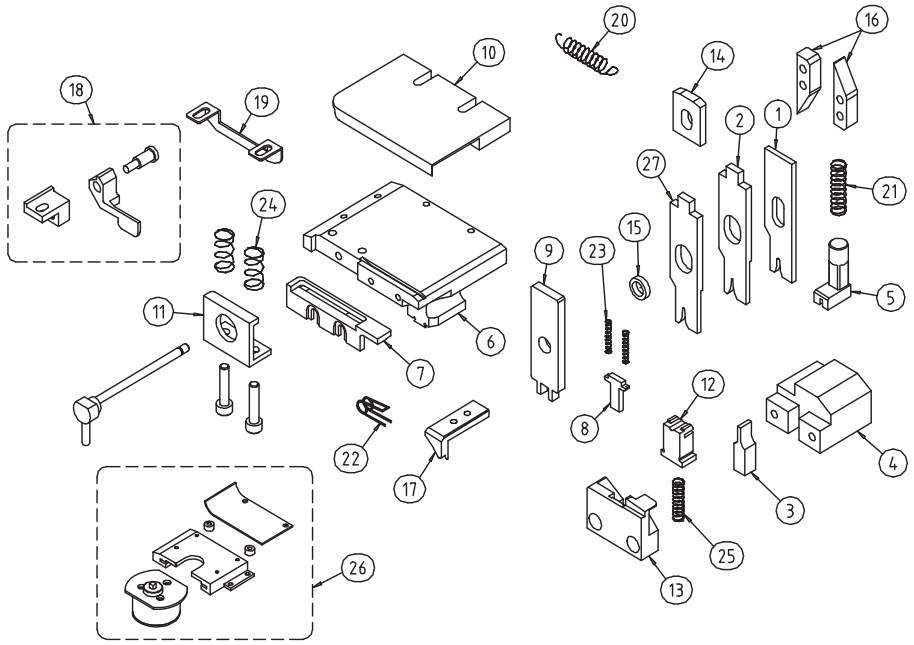Rev.1



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-1045XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-1045XID		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-1045XAD		ANVIL アンビル	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7116-1045XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-1045XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-1045XYB		BASE ベース	22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-1045XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-101 ③	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	103 ③	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
10	48A47020	A05	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ		7116-1045XKP		BRACKET ブラケット
12	48A19049	018 ③	SHEARBLADE シャーブレード	27			~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	005 ③	OUTER SHEARBLADE アウターシャーブレード	〈OPTION オプション〉			
14	48A19007	013①	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	102	OUTER SHEARBLADE アウターシャーブレード
15	48A19019	024	BUSH ブッシュ	14	48A47042	-003	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	005 ②	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計
					APPRICATION POST 申請部署	
					HIB	
③	2024/5/13	48A47016-002→48A47016-101 48A47017-003→48A47016-103 48A19049-001→48A19049-018 48A47025-001→48A47025-005	C24E046	S.KAWAMORI	DESIGNED DATE 設計日	
					2007/7/18	
②	2010/9/20	001→005	101-073	Y.YAGI	K,Hiraguchi	T,Suzuki
①	2008/9/25	010→013	QX7	C,Abe		
					2007/7/18	2007/7/18

REVISED

ISSUE
2024/06/04
YAZAKI PARTS CO.LTD HAIBARA OFFICE

ISSUED 発行