PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2606E021

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71161079 * SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-1079-06	*	MXC2	4514417508	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7116-1079-06

Anvil			Wire Crimper			Insulation Crimper		
7116-1079ZZXAC		(N)	7116-1079XW		(1)	7116-1079ZZXIC		(N)
CW (c)	2.80	*CW (i)* 3.56	*CW*	2.80		*CW*	3.56	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0.12 - 0.63 mm 0.25 - 0.76 mm	0.15 0.58		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.5 mm	0.36		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 3 ° 0 - 3 °	0.24		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.5 - 0.7 mm	0.68		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 5 °	3.21		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 3 °	0.64		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec.

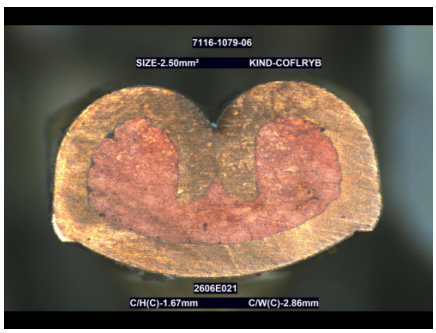
(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.41	1.42	5.10
	+/- 0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.67	1.67	4.55
	+/- 0.05		

REMARKS:

The applicable wire size range 1.00mm²~2.50mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº33664	PREPARED (Operator) nº19477
	Dinis Gannos	Renato Tavares
Date: 06/08/2026	Date: 06/08/2026	Date: 05/08/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°
2606E021

LOWER WIRE KIND & SIZE

C/W(I): 3.71 mm
Wire kind: COFLRYB
Wire size: 1.50 mm²
Nominal Cr. Height: 1.41 2.7 mm
+/- 0.05 0.1 mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.416	2.699
2	1.415	2.703
3	1.412	2.705
4	1.416	2.706
5	1.420	2.702
6	1.416	2.698
7	1.412	2.705
8	1.410	2.710
9	1.413	2.710
10	1.414	2.707
11	1.416	2.704
12	1.413	2.709
13	1.411	2.706
14	1.415	2.704
15	1.418	2.707
16	1.420	2.708
17	1.417	2.705
18	1.415	2.701
19	1.411	2.709
20	1.413	2.709
21	1.411	2.700
22	1.406	2.705
23	1.413	2.711
24	1.414	2.707
25	1.417	2.704
26	1.421	2.699
27	1.418	2.707
28	1.412	2.710
29	1.416	2.706
30	1.416	2.706
31	1.413	2.704
32	1.415	2.702
33	1.417	2.700
34	1.413	2.707
35	1.416	2.702
36	1.417	2.703
37	1.419	2.708
38	1.417	2.710
39	1.414	2.707
40	1.418	2.702
41	1.416	2.701
42	1.414	2.705
43	1.415	2.705
44	1.418	2.707
45	1.415	2.706
46	1.414	2.709
47	1.416	2.706
48	1.418	2.701
49	1.421	2.702
50	1.418	2.699
Average	1.42	2.70
Cmk	5.10	9.43

UPPER WIRE KIND & SIZE

C/W(I): 3.70 mm
Wire kind: COFLRYB
Wire size: 2.50 mm²
Nominal Cr. Height: 1.67 2.9 mm
+/- 0.05 0.1 mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.675	2.908
2	1.678	2.907
3	1.676	2.903
4	1.671	2.900
5	1.668	2.900
6	1.671	2.901
7	1.673	2.906
8	1.677	2.906
9	1.675	2.901
10	1.673	2.907
11	1.676	2.910
12	1.677	2.914
13	1.669	2.902
14	1.671	2.904
15	1.674	2.906
16	1.676	2.904
17	1.673	2.904
18	1.670	2.902
19	1.674	2.906
20	1.676	2.907
21	1.677	2.911
22	1.672	2.908
23	1.670	2.910
24	1.664	2.904
25	1.668	2.904
26	1.671	2.906
27	1.673	2.910
28	1.678	2.908
29	1.674	2.907
30	1.670	2.903
31	1.674	2.902
32	1.676	2.904
33	1.680	2.906
34	1.678	2.912
35	1.676	2.913
36	1.674	2.906
37	1.667	2.904
38	1.672	2.902
39	1.673	2.904
40	1.670	2.906
41	1.669	2.910
42	1.679	2.906
43	1.677	2.900
44	1.674	2.898
45	1.669	2.906
46	1.670	2.903
47	1.672	2.905
48	1.676	2.906
49	1.674	2.900
50	1.676	2.901
Average	1.67	2.91
Cmk	4.55	8.87

Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	ZZ	TERMINAL No. 端子品番	7116-1079 C
共通品番	– – – – – – – –		

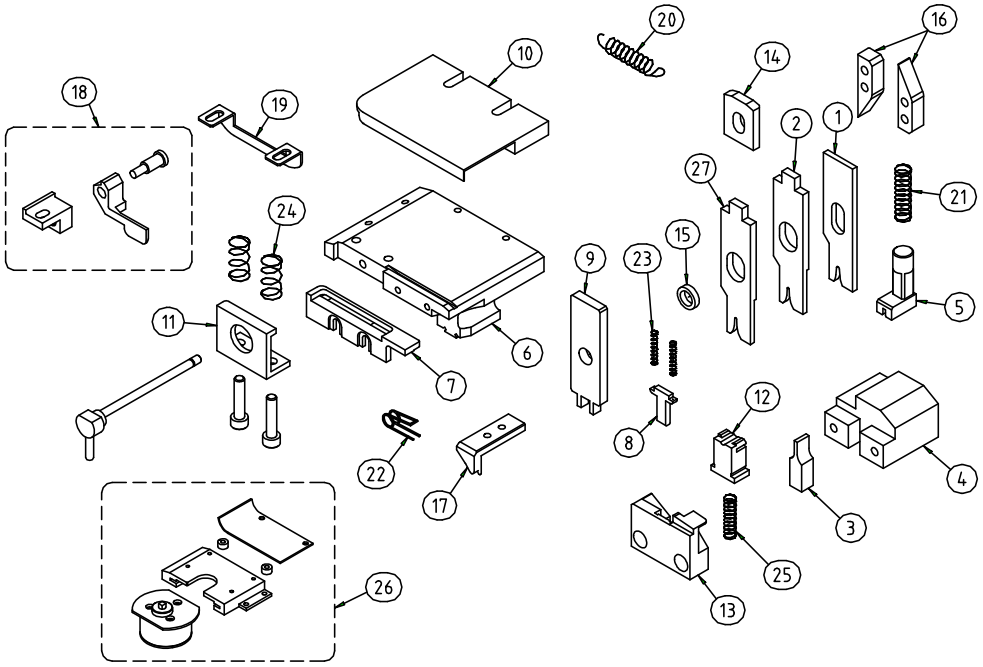

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-1079XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-1079ZZXIC		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-1079ZZXAC		ANVIL アンビル	19	48A19047	003	TERMINAL SCRAPER 端子掻き落とし
4	7116-1079XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-1079XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-1079XYB		BASE ベース	22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-1079XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	001	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレードスプリング
10	48A47020	A06	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ		7116-1079XKP		BRACKET ブラケット
12	48A47024	001	SHEARBLADE シャープレード	27	~~7116-1079XQ~~		~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	001	OUTER SHEARBLADE アウターシャープレード	〈OPTION オプション〉			
14	48A19007	020	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	101	OUTER SHEARBLADE アウターシャープレード
15	48A19019	013	BUSH ブッシュ	14	48A47042	002	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	005	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					YWTL		
					DESIGNED DATE 設計日		
					04-05-2016		
					APPROVED 承認	DESIGNED 設計	
					S.Junior	C.F.Almeida	
					04-05-2016	04-05-2016	