PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2606E022

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71167308 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-7308-02	*	MXS	4514417508	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7116-7308-02	7116-7308-06		







Anvil		
7116-7308XA		(N)
CW (c) 1.42	*CW (i)* 2.03	

Wire Crimper		
7116-7308XW		(N)
CW	1.40	

Insulation Crimper		
7116-7308XI		(1)
CW	2.03	

1 - VISUAL / MEASURED CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

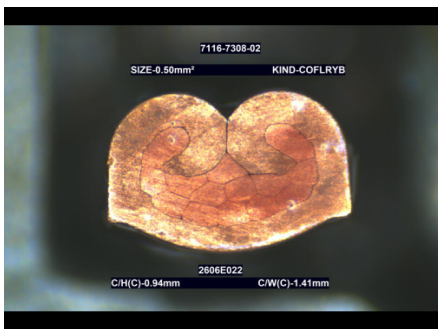
			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.25 mm 0.1 - 0.4 mm	0.16 0.33		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.25		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 5 ° 0 - 5 °	1		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 0.7 mm	0.25		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 5 °	0.6		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 3 °	0.7		The body of the terminal is not twisted.	O

(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.93	0.93	2.48
	+/- **0.03**		

	NOMINAL	AVERAGE	Cmk
mm	1.07	1.08	2.23
	+/- **0.03**		

REMARKS:

Applicable wire range 0.50mm²~0.75mm²

EVALUATION DECISION

SUITABLE	X
NOT SUITABLE	

FOR USE IN PRODUCTION

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº18388	PREPARED (Operator) nº33664
	HELDER ROCHA	Dimis Bannos
Date: 05/08/2026	Date: 05/08/2026	Date: 05/08/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

2606E022

LOWER WIRE KIND & SIZE

C/W(I): 1.98 mm

Wire kind: COFLRYB

Wire size: 0.50 mm²

Nominal Cr. Height:	0.93	1.7	mm
+/-	0.03	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	0.933	1.710
2	0.933	1.730
3	0.932	1.708
4	0.936	1.711
5	0.934	1.711
6	0.940	1.731
7	0.934	1.713
8	0.941	1.713
9	0.932	1.716
10	0.938	1.731
11	0.933	1.716
12	0.938	1.729
13	0.930	1.717
14	0.937	1.717
15	0.933	1.711
16	0.935	1.711
17	0.935	1.727
18	0.939	1.717
19	0.934	1.717
20	0.941	1.727
21	0.934	1.710
22	0.938	1.709
23	0.932	1.712
24	0.939	1.708
25	0.932	1.714
26	0.943	1.721
27	0.933	1.718
28	0.941	1.707
29	0.931	1.716
30	0.936	1.742
31	0.930	1.715
32	0.937	1.710
33	0.929	1.723
34	0.934	1.705
35	0.933	1.722
36	0.935	1.709
37	0.933	1.742
38	0.935	1.738
39	0.933	1.735
40	0.935	1.714
41	0.929	1.716
42	0.936	1.731
43	0.928	1.704
44	0.932	1.731
45	0.932	1.730
46	0.932	1.708
47	0.932	1.731
48	0.930	1.713
49	0.930	1.731
50	0.932	1.712
Average	0.93	1.72
Cmk	2.48	2.71

UPPER WIRE KIND & SIZE

C/W(I): 2.06 mm

Wire kind: COFLRYB

Wire size: 0.75 mm²

Nominal Cr. Height:	1.07	2.05	mm
+/-	0.03	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.074	2.056
2	1.074	2.060
3	1.073	2.056
4	1.079	2.058
5	1.073	2.061
6	1.077	2.056
7	1.074	2.066
8	1.078	2.057
9	1.074	2.067
10	1.078	2.060
11	1.081	2.065
12	1.076	2.071
13	1.083	2.063
14	1.076	2.071
15	1.082	2.064
16	1.083	2.067
17	1.083	2.071
18	1.077	2.073
19	1.081	2.066
20	1.077	2.064
21	1.079	2.072
22	1.081	2.068
23	1.080	2.066
24	1.076	2.068
25	1.084	2.075
26	1.076	2.065
27	1.083	2.065
28	1.079	2.074
29	1.083	2.073
30	1.078	2.063
31	1.079	2.074
32	1.082	2.072
33	1.078	2.066
34	1.082	2.069
35	1.078	2.069
36	1.084	2.078
37	1.080	2.076
38	1.082	2.079
39	1.077	2.068
40	1.079	2.072
41	1.081	2.077
42	1.084	2.080
43	1.076	2.077
44	1.082	2.073
45	1.077	2.080
46	1.077	2.082
47	1.080	2.073
48	1.076	2.072
49	1.082	2.079
50	1.075	2.083
Average	1.08	2.07
Cmk	2.23	3.83

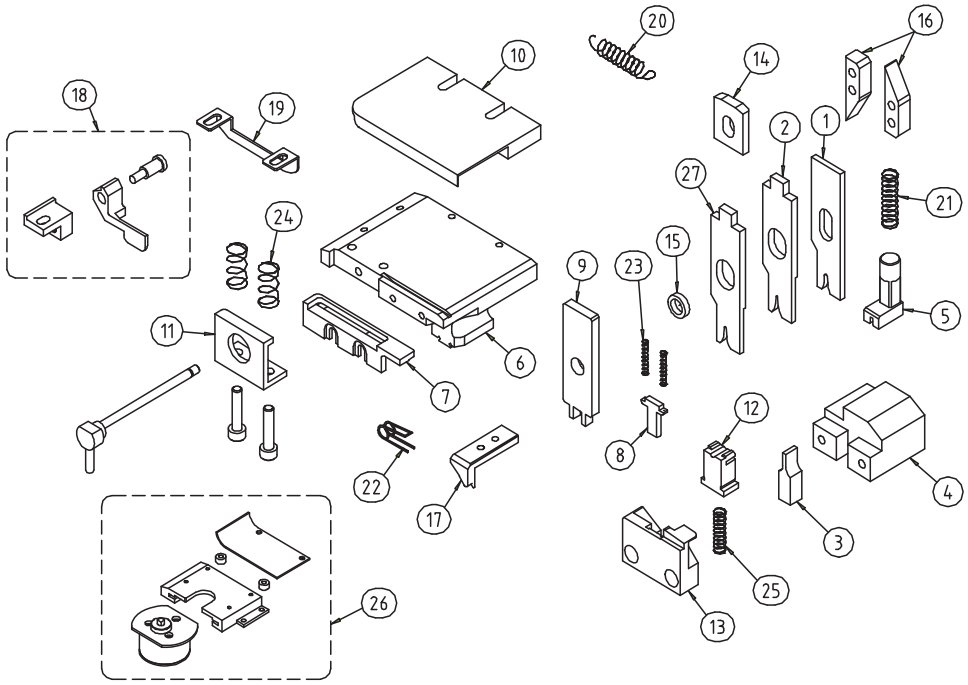
Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-5699	TERMINAL No. 端子品番	7116-7308
Common PN 共通品番	–	–	–
	–	–	

Rev.1



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-7308XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	-001	FEEDING CLAW 送り爪
2	7116-7308XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-7308XA		ANVIL アンビル	19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
4	7116-7308XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-7308XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-002 ①	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-7308XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-7308XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-003	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
10	48A47020	-A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7116-7308XKP		BRACKET ブラケット
12	48A47024	-001	SHEARBLADE シャーブレード	27	~~7116-7308XQ~~		~~STABILIZER CRIMPER~~ ~~スタビライザークリンパー~~
13	48A47025	-001	OUTER SHEARBLADE アウターシャーブレード	〈OPTION オプション〉			
14	48A19007	-026	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャーブレード
15	48A19019	-016	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-003	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
①	2025/5/23	48A47032-001→48A47032-002	C25E033	S.KAWAMORI

APPRICATION POST 申請部署	
YWTS	
DESIGNED DATE 設計日	
2013/4/23	
APPROVED 承認	DESIGNED 設計
H.Hasegawa	C.Almeida
2017/2/3	2013/4/23

REVISED

ISSUE
2025/05/30
YAZAKI PARTS CO.LTD
HAIBARA OFFICE

ISSUED
発行