PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2606E023

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71168012 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-8012-06	*	MXC	4514417508	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7116-8012-06			

Anvil		
7116-8012XAC		(N)
CW (c) 2.05	*CW (i)* 2.54	

Wire Crimper		
7116-8012XW		(N)
CW	2.03	

Insulation Crimper		
7116-8012XIC		(1)
CW	2.54	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.6 mm 0.2 - 0.6 mm	0.22 0.34		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.5 mm	0.29		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 6 ° 0 - 6 °	1.4		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 0.7 mm	0.37		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 12 °	1.4		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 5 °	0.08		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE | **UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.25	1.25	6.20
	+/- 0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.35	1.35	6.63
	+/- 0.05		

REMARKS:

Applicable wire range 0.50mm²~1.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº18388
Date: 29/07/2026	Date: 29/07/2026	Date: 29/07/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

2606E023

LOWER WIRE KIND & SIZE

C/W(I): 2.58 mm

Wire kind: COFLRYB

Wire size: 0.5 mm²

Nominal Cr. Height:	1.25	2.2	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.251	2.205
2	1.254	2.202
3	1.248	2.204
4	1.249	2.209
5	1.253	2.208
6	1.248	2.207
7	1.252	2.209
8	1.248	2.205
9	1.254	2.204
10	1.255	2.198
11	1.252	2.202
12	1.249	2.202
13	1.253	2.209
14	1.255	2.204
15	1.248	2.202
16	1.255	2.198
17	1.253	2.209
18	1.249	2.208
19	1.252	2.209
20	1.255	2.205
21	1.254	2.207
22	1.255	2.209
23	1.249	2.198
24	1.248	2.209
25	1.253	2.202
26	1.252	2.209
27	1.251	2.207
28	1.255	2.209
29	1.254	2.204
30	1.248	2.208
31	1.255	2.198
32	1.248	2.205
33	1.249	2.202
34	1.253	2.207
35	1.252	2.204
36	1.249	2.202
37	1.254	2.209
38	1.255	2.198
39	1.248	2.205
40	1.253	2.209
41	1.251	2.204
42	1.252	2.209
43	1.249	2.198
44	1.254	2.208
45	1.249	2.209
46	1.255	2.205
47	1.253	2.209
48	1.248	2.198
49	1.254	2.207
50	1.249	2.205
Average	1.25	2.21
Cmk	6.20	8.51

UPPER WIRE KIND & SIZE

C/W(I): 2.61 mm

Wire kind: COFLRYB

Wire size: 1 mm²

Nominal Cr. Height:	1.35	2.5	mm
+/-	0.05	0.1	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.350	2.509
2	1.347	2.507
3	1.349	2.498
4	1.348	2.509
5	1.350	2.504
6	1.347	2.509
7	1.350	2.507
8	1.348	2.509
9	1.350	2.498
10	1.355	2.509
11	1.353	2.507
12	1.350	2.509
13	1.347	2.502
14	1.350	2.509
15	1.353	2.498
16	1.353	2.505
17	1.349	2.509
18	1.355	2.504
19	1.350	2.507
20	1.347	2.509
21	1.350	2.505
22	1.353	2.502
23	1.349	2.507
24	1.350	2.509
25	1.355	2.505
26	1.347	2.504
27	1.350	2.509
28	1.348	2.503
29	1.350	2.509
30	1.347	2.505
31	1.350	2.507
32	1.349	2.509
33	1.350	2.505
34	1.347	2.504
35	1.350	2.502
36	1.348	2.498
37	1.353	2.507
38	1.349	2.509
39	1.348	2.505
40	1.355	2.507
41	1.353	2.509
42	1.350	2.504
43	1.348	2.505
44	1.349	2.507
45	1.347	2.498
46	1.350	2.504
47	1.355	2.509
48	1.347	2.505
49	1.349	2.507
50	1.355	2.502
Average	1.35	2.51
Cmk	6.63	9.32

Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-4481	TERMINAL No. 端子品番	7116-8012C
共通品番	– – – – – – – –		

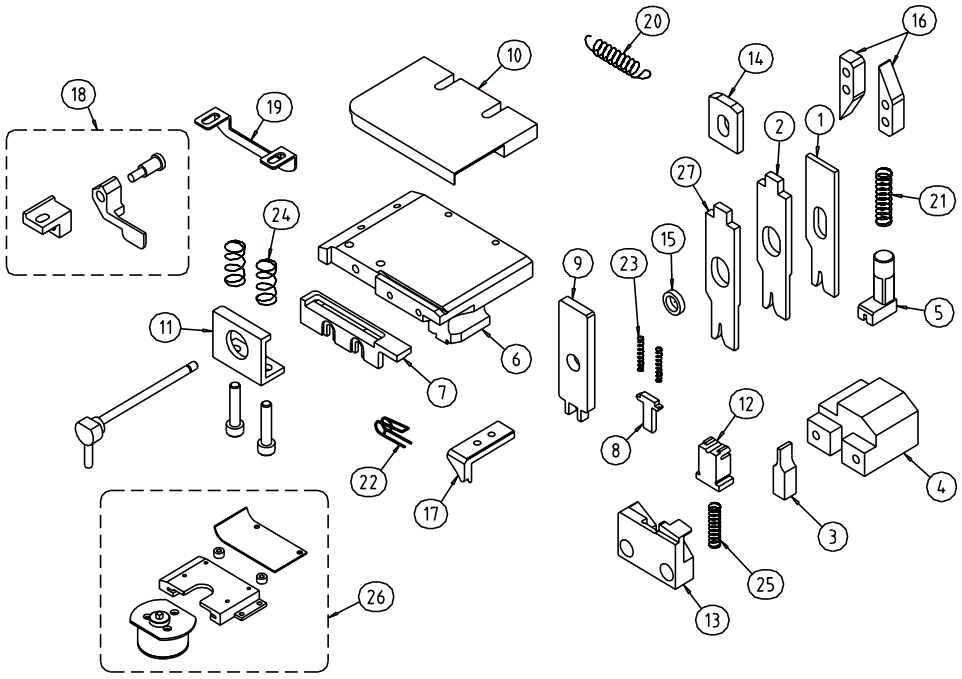

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-8012XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-8012XIC		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰｱｯｼｰ
3	7116-8012XAC		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	002	TERMINAL SCRAPER 端子掻き落とし
4	7116-8012XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-8012XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-8012XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-8012XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	002	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-8012XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	001	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰ=ｸﾘﾝﾊﾟｰ~~
13	48A47025	001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	025	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
15	48A19019	013	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署	
HIB	
DESIGNED DATE 設計日	
1/31/2008	
APPROVED 承認	DESIGNED 設計
T,Maki	T,Suzuki
1/31/2008	1/31/2008

ISSUED 発行

ISSUE
3/6/2018
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.