PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2606E024

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71169759 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-9759-08	*	MXK	4514417508	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7116-9759-08			

Anvil		
7116-9759XA		(N)
CW (c) 1.95	CW (i) 2.44	

Wire Crimper	
7116-9759XW	(1)
CW 1.93	

Insulation Crimper	
7116-9759XI	(1)
CW 2.44	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.2 mm 0.2 - 0.6 mm	0.18 0.5		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.5 mm	0.11		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.2 mm 0 - 0.2 mm	0.12		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 0.5 mm	0.4		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	0.8		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.4 mm	0.04		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable


(*) - Specified on Crimping Spec.


(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

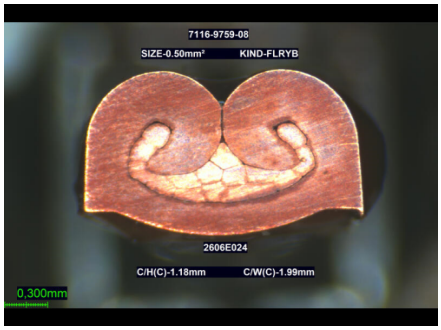

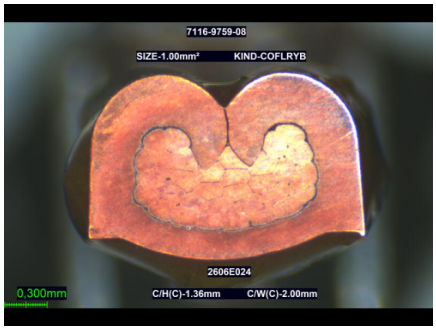

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.18	1.19	9.43
	+/- 0.08		

	NOMINAL	AVERAGE	Cmk
mm	1.36	1.37	5.59
	+/- 0.05		

REMARKS:

Applicable wire range-0.50~1.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº18388	PREPARED (Operator) nº2624
	HELDER ROCHA	
Date: 05/08/2026	Date: 05/08/2026	Date: 05/08/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

2606E024

LOWER WIRE KIND & SIZE

C/W(l): 2.36 mm

Wire kind: FLRYB

Wire size: 0.50 mm²

Nominal Cr. Height:	1.18	2	mm
+/-	0.08	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.182	1.994
2	1.185	1.997
3	1.182	1.999
4	1.183	2.001
5	1.181	2.003
6	1.185	2.001
7	1.180	2.003
8	1.184	2.000
9	1.181	1.998
10	1.185	2.000
11	1.183	2.001
12	1.183	2.004
13	1.189	2.003
14	1.185	2.006
15	1.186	2.009
16	1.185	2.005
17	1.189	2.008
18	1.188	2.011
19	1.183	2.010
20	1.187	2.010
21	1.183	2.012
22	1.184	2.013
23	1.182	2.010
24	1.183	2.009
25	1.185	2.010
26	1.182	2.007
27	1.191	2.009
28	1.185	2.005
29	1.184	2.009
30	1.189	2.007
31	1.182	2.004
32	1.188	2.008
33	1.188	2.006
34	1.184	2.009
35	1.184	2.007
36	1.186	2.008
37	1.184	2.006
38	1.186	2.008
39	1.186	2.006
40	1.186	2.005
41	1.186	2.006
42	1.189	2.004
43	1.185	2.001
44	1.183	2.010
45	1.185	2.007
46	1.186	2.008
47	1.185	2.009
48	1.193	2.007
49	1.188	2.006
50	1.183	2.006
Average	1.19	2.01
Cmk	9.43	7.78

UPPER WIRE KIND & SIZE

C/W(l): 2.46 mm

Wire kind: COFLRYB

Wire size: 1.00 mm²

Nominal Cr. Height:	1.36	2.3	mm
+/-	0.05	0.1	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.365	2.301
2	1.370	2.301
3	1.367	2.301
4	1.365	2.298
5	1.369	2.302
6	1.367	2.304
7	1.365	2.308
8	1.366	2.303
9	1.373	2.301
10	1.368	2.301
11	1.366	2.302
12	1.365	2.298
13	1.369	2.304
14	1.366	2.309
15	1.364	2.307
16	1.369	2.305
17	1.368	2.305
18	1.366	2.309
19	1.369	2.306
20	1.367	2.302
21	1.370	2.300
22	1.366	2.305
23	1.370	2.301
24	1.373	2.299
25	1.370	2.298
26	1.367	2.299
27	1.366	2.302
28	1.364	2.297
29	1.364	2.296
30	1.364	2.303
31	1.367	2.304
32	1.370	2.297
33	1.368	2.296
34	1.367	2.301
35	1.371	2.301
36	1.374	2.301
37	1.371	2.297
38	1.369	2.297
39	1.366	2.298
40	1.370	2.301
41	1.367	2.297
42	1.366	2.297
43	1.366	2.302
44	1.369	2.299
45	1.370	2.302
46	1.368	2.304
47	1.370	2.302
48	1.373	2.305
49	1.370	2.303
50	1.367	2.306
Average	1.37	2.30
Cmk	5.59	9.79

Acceptance criteria: Cmk >= 2

END

04 アプリケーター 消耗部品表 ／04 APPLICATOR CONSUMABLE PARTS LIST

製品番号 PRODUCT No.	C0100-4078	端子品番 TERMINAL No.	7116-9759

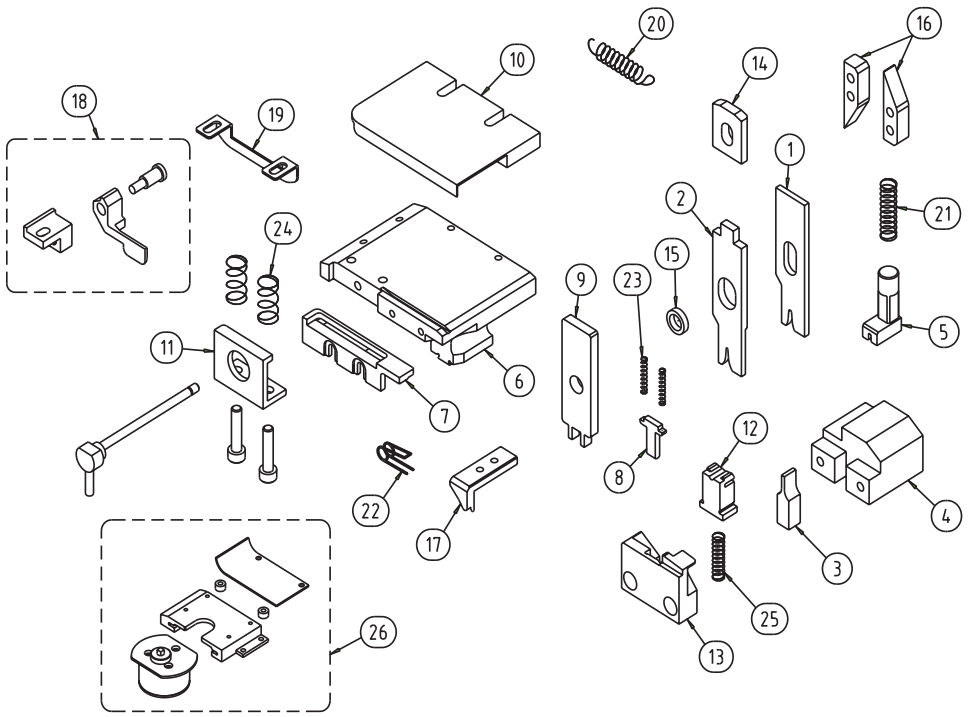

No.	部品番号 PARTS No.	図番 DRW. No.	部品名称 PARTS NAME
1	7116-9759XW		ワイヤークリンパー WIRE CRIMPER
2	7116-9759XI		インシュクリンパー INSULATION CRIMPER
3	7116-9759XA		アンビル ANVIL
4	7116-9759XJE		アンビルホルダー ANVIL HOLDER
5	7116-9759XYY		サポーティングストッパー SUPPORTING STOPPER
6	7116-9759XYB		ベース BASE
7	7116-9759XYH		ターミナルガイドプレートB TERMINAL GUIDE PLATE B
8	48A47016	001	電線押さえ WIRE HOLDER
9	48A47017	002	切断ポンチ兼電線押さえホルダー CUTTING PUNCH & WIRE HOLDER
10	48A47020	A04	ターミナルガイドプレートA TERMINAL GUIDE PLATE A
11	48A47022	002	ターミナル押さえ TERMINAL HOLDER
12	48A47024	001	シャープレード SHEARBLADE
13	48A47025	001	アウターシャープレード OUTER SHEARBLADE
14	48A19007	020	インシュ調整コマ INSULATION ADJUSTING PIECE
15	48A19019	030	ブッシュ BUSH

No.	部品番号 PARTS No.	図番 DRW. No.	部品名称 PARTS NAME
16	48A47014	001	送りカム FEEDING CAM
17	48A47013		送り爪 FEEDING CLAW
18	48A19100	005	電線ストッパー Assy WIRE STOPPER Assy
19	48A19047	001	端子掻き落とし TERMINAL SCRAPER
20	48A47031		戻しスプリング RETURN SPRING
21	48A47032		サポーティングストッパースプリング SUPPORTING STOPPER SPRING
22	48A19017	003	送り爪スプリング FEEDING CLAW SPRING
23	48A19023	001	電線押さえスプリング WIRE HOLDER SPRING
24	48A19074		ターミナル押さえスプリング TERMINAL HOLDER SPRING
25	48A19050		シャープレードスプリング SHEARBLADE SPRING
26	48A47999		ターミナル塗油ユニット TERMINAL OIL UNIT
27	7116-9759XKP		ブラケット BRACKET
〈オプション OPTION〉			
14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK	DATE	REVISION RECORD	No.	CHECKED

APPRICATION POST	
専用機	
DESIGNED DATE	
2006/11/3	
APPROVED	DESIGNED
平口	八木
2006/11/3	2006/11/3

ISSUE
3/12/2018
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED MARK