PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2606E026

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72115181 * SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7211-5181-02	*	MXS	4514417508	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7211-5181-02	7211-5181-06		

Anvil			Wire Crimper			Insulation Crimper		
7211-5181XA		(N)	7211-5181XW		(N)	7211-5181XI		(N)
CW (c)	1.42	CW (i) 2.03	CW	1.40		CW	2.03	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.3 mm 0.1 - 0.5 mm	0.06 0.39		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.17		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.25 mm 0 - 0.25 mm	0.03		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 0.4 mm	0.18		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	1.4		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.15 mm	0.04		The body of the terminal is not twisted.	O


O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

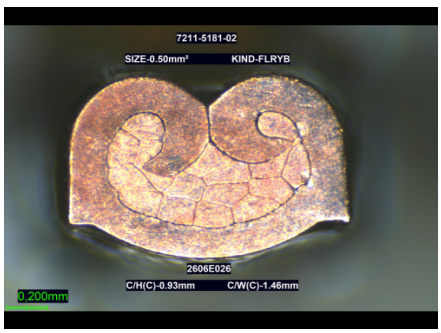2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.93	0.93	2.48
	+/- **0.03**		

	NOMINAL	AVERAGE	Cmk
mm	1.07	1.07	6.19
	+/- **0.03**		

REMARKS:

Applicable wire range-0.50~0.75mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº2624
Date: 29/07/2026	Date: 29/07/2026	Date: 28/07/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

2606E026

LOWER WIRE KIND & SIZE

C/W(I): 1.98 mm

Wire kind: FLRYB

Wire size: 0.50 mm²

Nominal Cr. Height:	0.93	1.7	mm
+/-	0.03	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	0.931	1.683
2	0.935	1.684
3	0.931	1.687
4	0.929	1.689
5	0.936	1.689
6	0.933	1.691
7	0.930	1.693
8	0.934	1.689
9	0.931	1.693
10	0.933	1.694
11	0.937	1.694
12	0.934	1.694
13	0.939	1.696
14	0.944	1.691
15	0.938	1.696
16	0.936	1.698
17	0.937	1.699
18	0.936	1.696
19	0.932	1.698
20	0.931	1.699
21	0.934	1.697
22	0.936	1.696
23	0.934	1.699
24	0.933	1.701
25	0.937	1.696
26	0.932	1.699
27	0.932	1.700
28	0.930	1.698
29	0.929	1.695
30	0.929	1.700
31	0.928	1.700
32	0.929	1.697
33	0.933	1.698
34	0.929	1.693
35	0.927	1.692
36	0.927	1.696
37	0.928	1.698
38	0.933	1.701
39	0.929	1.700
40	0.929	1.696
41	0.928	1.700
42	0.927	1.697
43	0.926	1.695
44	0.927	1.693
45	0.930	1.699
46	0.928	1.699
47	0.928	1.701
48	0.928	1.698
49	0.929	1.696
50	0.933	1.701
Average	0.93	1.70
Cmk	2.48	7.46

UPPER WIRE KIND & SIZE

C/W(I): 2.05 mm

Wire kind: COFLRYB

Wire size: 0.75 mm²

Nominal Cr. Height:	1.07	2.05	mm
+/-	0.03	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.072	2.058
2	1.071	2.060
3	1.072	2.057
4	1.074	2.055
5	1.073	2.067
6	1.074	2.059
7	1.074	2.060
8	1.073	2.059
9	1.074	2.060
10	1.074	2.060
11	1.073	2.059
12	1.074	2.061
13	1.073	2.058
14	1.074	2.055
15	1.079	2.054
16	1.076	2.057
17	1.075	2.056
18	1.073	2.057
19	1.073	2.067
20	1.074	2.056
21	1.074	2.055
22	1.073	2.056
23	1.074	2.057
24	1.073	2.057
25	1.074	2.058
26	1.072	2.058
27	1.074	2.059
28	1.073	2.058
29	1.074	2.055
30	1.073	2.057
31	1.072	2.056
32	1.074	2.058
33	1.077	2.059
34	1.075	2.060
35	1.076	2.058
36	1.075	2.070
37	1.073	2.056
38	1.073	2.060
39	1.074	2.058
40	1.073	2.059
41	1.074	2.061
42	1.073	2.058
43	1.073	2.058
44	1.074	2.060
45	1.073	2.058
46	1.072	2.068
47	1.073	2.058
48	1.077	2.061
49	1.074	2.056
50	1.072	2.059
Average	1.07	2.06
Cmk	6.19	9.40


Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-5632	TERMINAL No. 端子品番	7211-5181

共通品番	–	–	–	–
	–	–		

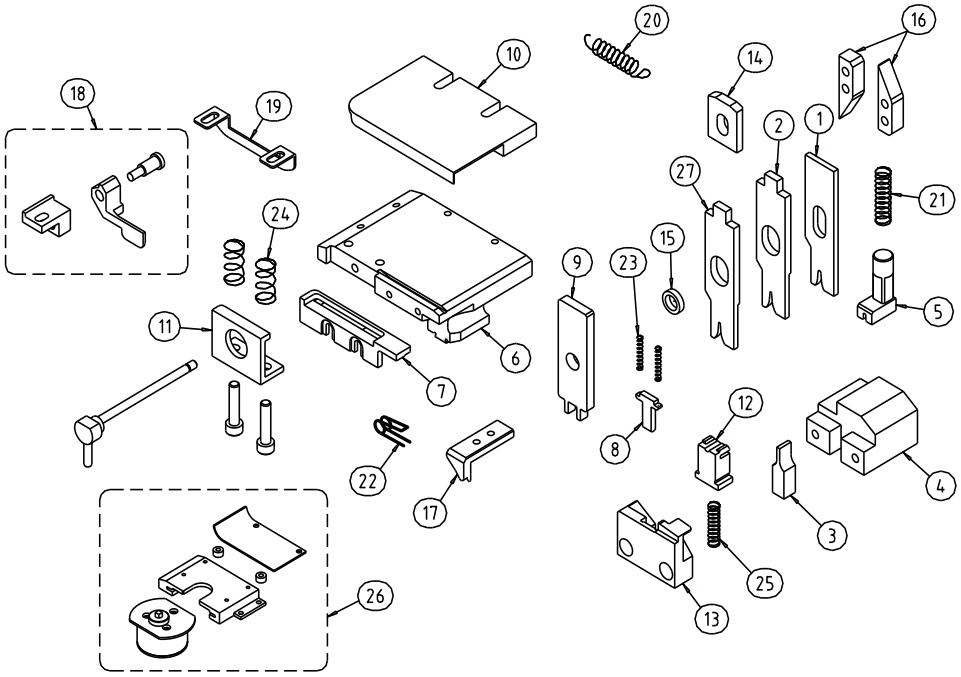

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7211-5181XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	-001	FEEDING CLAW 送り爪
2	7211-5181XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7211-5181XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
4	7211-5181XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7211-5181XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7211-5181XYB		BASE ﾍﾞｰｽ	22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7211-5181XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	-002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	-A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7211-5181XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	-001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	~~7211-5181XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	-001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	-026	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	-016	BUSH ﾌﾞｯｼｭ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	-003	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署	
YUL	
DESIGNED DATE 設計日	
15-02-2013	
APPROVED 承認	DESIGNED 設計
T,Maki	C.Almeida
15-02-2013	15-02-2013

ISSUED 発行