PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2606E027

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72950087 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7295-0087-02	*	MXS	4514417508	DAIMLER TRUCK - BEV







Applicable Terminals for this Tool:

7295-0087-02	7295-0087-06		

Anvil			Wire Crimper			Insulation Crimper		
7295-0087XA		(N)	7295-0087XW		(N)	7295-0087XI		(N)
CW (c)	1.37	*CW (i)* 1.78	*CW*	1.35		*CW*	1.78	

1 - VISUAL / MEASURED CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.3 mm 0.3 - 0.7 mm	0.09 0.45		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.22		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.2 mm 0 - 0.2 mm	0.07		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0 - 0.4 mm	0.3		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	1.74		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 3 °	0.5		The body of the terminal is not twisted.	O

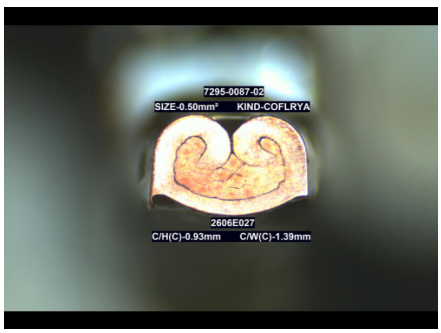
(*) - Specified on Crimping Spec.

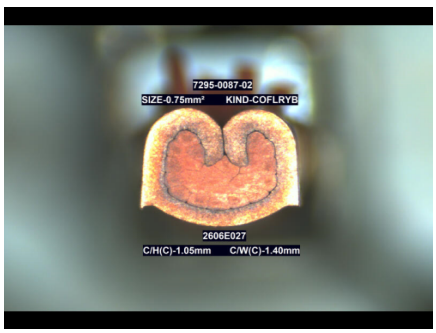
(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.93	0.94	2.87
	+/- **0.03**		

	NOMINAL	AVERAGE	Cmk
mm	1.05	1.06	3.05
	+/- **0.03**		

REMARKS:

Aplicable wire range 0.50mm²~0.75mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº2988
		Jitor Hugo
Date: 29/07/2026	Date: 29/07/2026	Date: 28/07/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

2606E027

LOWER WIRE KIND & SIZE

C/W(I): 1.87 mm

Wire kind: COFLRYA

Wire size: 0.50 mm²

Nominal Cr. Height:	0.93	1.95	mm
+/-	0.03	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	0.938	1.951
2	0.940	1.949
3	0.931	1.955
4	0.934	1.947
5	0.932	1.956
6	0.929	1.954
7	0.932	1.960
8	0.934	1.956
9	0.932	1.957
10	0.930	1.957
11	0.936	1.958
12	0.933	1.954
13	0.935	1.958
14	0.931	1.955
15	0.936	1.960
16	0.933	1.956
17	0.933	1.957
18	0.937	1.960
19	0.933	1.961
20	0.936	1.957
21	0.938	1.958
22	0.934	1.954
23	0.939	1.961
24	0.935	1.955
25	0.934	1.961
26	0.938	1.961
27	0.937	1.953
28	0.934	1.958
29	0.940	1.954
30	0.937	1.959
31	0.937	1.953
32	0.939	1.958
33	0.932	1.954
34	0.932	1.959
35	0.938	1.956
36	0.937	1.960
37	0.940	1.955
38	0.937	1.960
39	0.938	1.958
40	0.937	1.955
41	0.936	1.959
42	0.940	1.954
43	0.935	1.961
44	0.939	1.957
45	0.934	1.962
46	0.933	1.958
47	0.938	1.957
48	0.932	1.961
49	0.934	1.957
50	0.938	1.961
Average	0.94	1.96
Cmk	2.87	9.70

UPPER WIRE KIND & SIZE

C/W(I): 1.89 mm

Wire kind: COFLRYB

Wire size: 0.75 mm²

Nominal Cr. Height:	1.05	2.1	mm
+/-	0.03	0.1	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.057	2.104
2	1.061	2.110
3	1.058	2.104
4	1.055	2.108
5	1.061	2.101
6	1.056	2.099
7	1.061	2.103
8	1.061	2.099
9	1.056	2.102
10	1.060	2.100
11	1.058	2.105
12	1.055	2.099
13	1.055	2.103
14	1.061	2.100
15	1.055	2.104
16	1.055	2.098
17	1.061	2.102
18	1.057	2.106
19	1.056	2.102
20	1.060	2.096
21	1.056	2.104
22	1.059	2.097
23	1.058	2.104
24	1.054	2.099
25	1.053	2.106
26	1.057	2.102
27	1.059	2.107
28	1.053	2.102
29	1.058	2.108
30	1.059	2.100
31	1.054	2.106
32	1.054	2.100
33	1.059	2.107
34	1.055	2.100
35	1.054	2.104
36	1.060	2.098
37	1.055	2.104
38	1.054	2.098
39	1.058	2.096
40	1.059	2.105
41	1.055	2.100
42	1.058	2.107
43	1.060	2.101
44	1.057	2.105
45	1.054	2.100
46	1.060	2.105
47	1.055	2.101
48	1.053	2.105
49	1.059	2.105
50	1.057	2.099
Average	1.06	2.10
Cmk	3.05	9.76

Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-5834	TERMINAL No. 端子品番	7295-0087
Common PN 共通品番	–	–	–
	–	–	

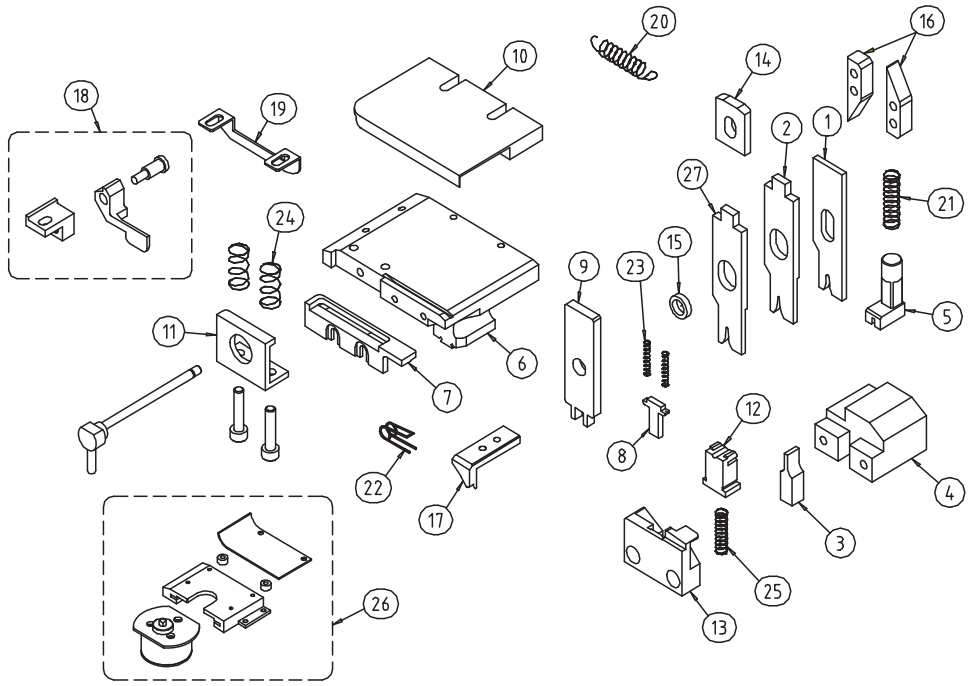

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7295-0087XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	-001	FEEDING CLAW 送り爪
2	7295-0087XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7295-0087XA		ANVIL アンビル	19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
4	7295-0087XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7295-0087XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7295-0087XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7295-0087XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-003①	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレードスプリング
10	48A47020	-A03	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7295-0087XKP		BRACKET ブラケット
12	48A47024	-001	SHEARBLADE シャープレード	27	~~7295-0087XQ~~		~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	-002	OUTER SHEARBLADE アウターシャープレード	〈OPTION オプション〉			
14	48A19007	-022	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャープレード
15	48A19019	-019	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-001	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					YTU-FIAT		REVISED
					DESIGNED DATE 設計日		
					2014/1/13		ISSUE 2016/12/20 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP
					APPROVED 承認	DESIGNED 設計	
①	2016/6/17	CUTTING PUNCH 002→003	16F-110	A.YAMADA	H.HASEGAWA	C.Almeida	
					2015/6/18	2014/1/13	