APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0201675

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70037608 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7003-7608-02	*	**G1_BC**	**YSD-3500186738**	*





Anvil		
7003-7608-00BAN/7003-7608-00BAP		(N/N)
CW (c) 15.00	*CW (i)* 16.10	



Wire Crimper	
7003-7608-00BW	(N)
CW 14.36	

Insulation Crimper	
7003-7608-00BI	(N)
CW 15.12	

1 - VISUAL CHECK ITEMS

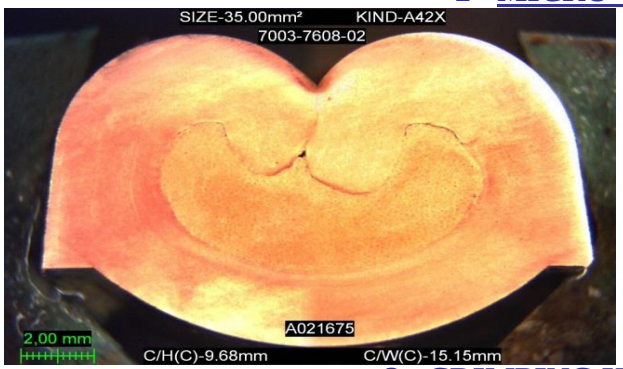
O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	NA
	Not found any burr in the cutting carrier.	NA
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	NA
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	9.7	9.68	17.44
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable Wire Range 35.00mm²~50.00mm²
Wire 35.00mm² C/W(I)-15.41mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 5061	PREPARED (Operator) nº 678
Date: 2020/Nov/03	Date: 2020/Nov/03	Date: 2020/Nov/03

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0201675

LOWER WIRE KIND & SIZE

Wire kind: A42X

Wire size: 35 mm²

Nominal Cr. Height:	9.7	15.2	mm
+/-	0.2	0.2	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	9.688	15.225
2	9.690	15.220
3	9.686	15.220
4	9.684	15.224
5	9.680	15.221
6	9.680	15.219
7	9.686	15.216
8	9.685	15.212
9	9.682	15.216
10	9.679	15.223
11	9.682	15.226
12	9.687	15.220
13	9.689	15.214
14	9.691	15.213
15	9.685	15.213
16	9.683	15.219
17	9.679	15.225
18	9.679	15.226
19	9.683	15.228
20	9.685	15.223
21	9.689	15.219
22	9.688	15.225
23	9.686	15.228
24	9.681	15.222
25	9.681	15.222
26	9.681	15.227
27	9.678	15.229
28	9.678	15.228
29	9.681	15.223
30	9.681	15.221
31	9.678	15.226
32	9.678	15.228
33	9.682	15.228
34	9.685	15.223
35	9.686	15.220
36	9.689	15.226
37	9.685	15.228
38	9.683	15.230
39	9.683	15.232
40	9.687	15.230
41	9.686	15.225
42	9.684	15.221
43	9.683	15.219
44	9.683	15.218
45	9.685	15.215
46	9.686	15.215
47	9.683	15.224
48	9.683	15.227
49	9.678	15.228
50	9.679	15.228
Average	9.68	15.22
Cmk	17.44	11.63

UPPER WIRE KIND & SIZE

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm

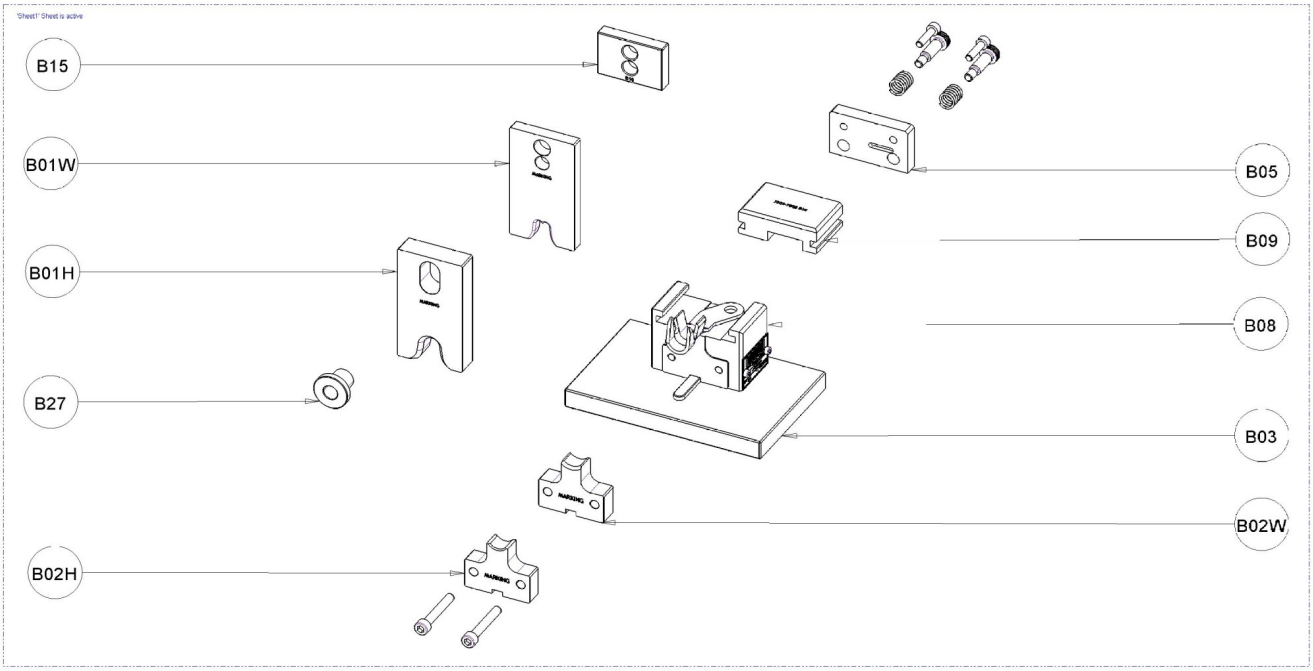
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2.0

END

APP BATTERY CABLE CONSUMABLE PART LIST

A0201675	7003-7608



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01H	***7003-7608-00BI***	INSULATION CRIMPER	1
B01W	***7003-7608-00BW***	WIRE CRIMPER	1
B02H	***7003-7608-00BAP***	INSULATION ANVIL	1
B02W	***7003-7608-00BAN***	WIRE ANVIL	1
B03	7003-7608 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7003-7608 B08	MAIN BLOCK	1
B09	7003-7608 B09	SLIDER	1
B15	B15	FRAME SPACER	1
B27	***7003-7608BYC***	BUSH	1