QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

CLIENT	MODEL	S/N	MAP
YAZAKI SALTANO DE OVAR, P.E. LDA	RSYP2280-JC_A	L 81797	
ORDER	**TERMINAL TO BE CRIMPED**		**A#**
5012822	7116-3364-06		

APPLICATOR SETUP

SETUP L.D.P. (mm.)=	190,00	STROKE	35 (mm)		MECAL	S.C.	S.T.M.	Note
Load Cal. (Kg.) =	850			Specification		X		
				Terminal Samples		X		
		Setup	Fixing. Ref.▼	Wire Samples		X		
POSITIVE CAM (Terminal present)		X	C	Housing Samples				
NEGATIVE CAM (Terminal absent)			B	Seal Samples				
			Fixing. Ref.▲	Applicounter			No	
				Mobile Ejector			No	
				Carrier strip to be cut			No	
				Conform to Mecal norms			Yes	
				Automatic machine				


FEEDING POINT OF THE TERMINAL

Hole	Slot	Wire wing	Insulation wing	Other
X				

	Crimp Height	Pull Force	Section	Photo
C				
M				
K			2,50	X

Setup on	Mod.	S/N
Press	P107C	42877
Stripper		

Strip length = (mm)



CRIMPING

WIRE	INSULATION	BARREL
 F	 F	
Profile dimension	Profile dimension	Profile dimension
Wire C. Profile Width (mm.) 4,1 (toll. +) 0,02	Insulation C. Profile Width (mm.) 6,00 (toll. +) 0,02	Barrel C. Profile Width (mm.) (toll. +)

WIRE CHARACTERISTICS


CRIMPING DIMENSIONS (mm.)

SECTION	COMPOSITION		Insulation	CONDUCTOR				INSULATION				BARREL			Pull Force	Crimp Force
					Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		Required HEIGHT ±	Required WIDTH ±	Measured WIDTH	Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		
mm²	Nb	Ø	Ø	Index Wire	0,05			Index Insulation	0,10						Toll. ± 2 % (N.)	C.F.A. (KN.)
3,70 Sez. reale 4,00 FLRYB	56	0,29	3,60	1,39	2,80		4,22	2,14	4,90		6,16				840	12,71
2,26 Sez. reale 2,50 FLRYB	50	0,24	2,80	1,49	2,68		4,20	2,24	4,70		6,15				470	12,64

CHECK



Description		Rif.	Test
Bent left or right (max)	3°	A	OK
Bent up or down (max)	3°	B	OK
Torsion (max)	3°	C	OK



Description		Rif.	Test
Bellmouth	(0.2-0.5)	D	OK
Cut-off (max)	0.5	E	OK
Wire overlay(min.)	0.5	F	OK


DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
28/12/2016	*Amarotto*	*Bruno*	*Zatti*

N.B.: MECAL affirms that the MECAL tool is in accordance with the above mentioned characteristics

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR, P.E. LDA | **WIRE** | **RSYP2280-JC_A** | **81797**

	Terminal
	7116-3364-06
Wire Section.	2,50
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

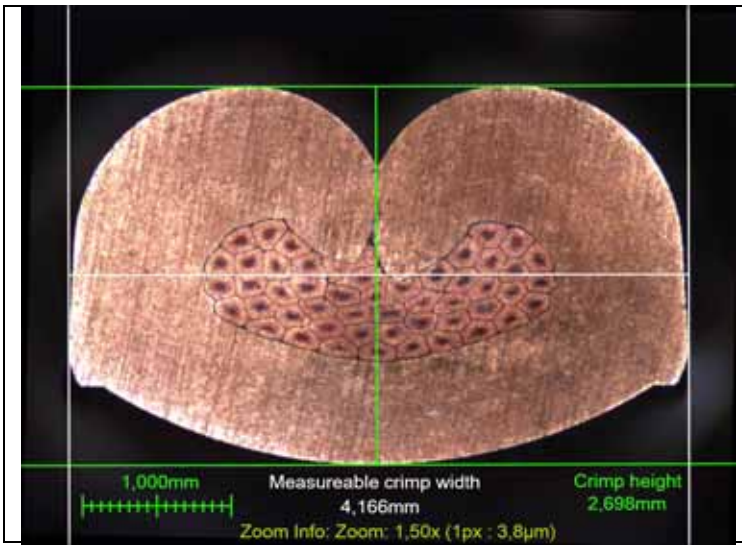

	Terminal
	7116-3364-06
Wire Section.	2,50
CH. (mm.)	2,68
C.W. (mm.)	4,20
Material Compression (%)	20,7
Wire Compression	
Terminal Compression	

	Terminal
	7116-3364-06
Wire Section.	2,50
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
28/12/2016	*Amarotto*	*Bruno*	*Zatti*

MECAL	DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST


DATA	28/12/2016	**CODICE**	**Qt.**	**Rif**		**CODICE**	**Qt.**	**Rif**
MODELLO		870550004	1	110		95127 0207	1	001
MODEL	**RSYP2280-JC_A**	601051006	1	130		60006 0040	1	005
TYPE		600052010	1	150		91112 0035	1	100
MODELE		911190000	1	160		99101 0039	1	120
		911070012	1	170		95127 0046	1	140
TERMINALE		840010014	1	180		99132 0007	1	240
TERMINAL	**7116-3364-06**	600030016	3	190		99128 0008	1	250
KONTAKT		790400003	1	200		91103 0042	1	290
COSSE		790340005	1	210		91117 0053	1	320
		790420004	1	220		91118 0184	1	330
MATRICOLA		790340003	5	230		60005 0012	1	339
SERIAL NU	**L 81797**	790340002	1	235		99017 0019	1	343
REGISTRIERNUMMER		791640006	1	242		60005 2010	1	344
MATRICULE		P0138	0,5	245		91125 0087	1	350
		911110013	1	260		88146 0018	1	355
		991130001	1	265		88146 0019	1	362
		991320003	1	280		60004 0006	4	365
		870620001	1	295		91106 0105	1	430
		880480008	1	300		91105 0014	1	440
		871980007	1	310		99017 0000	1	470
		990400003	1	315		62008 5230	1	490
		600061016	2	360		99131 0001	1	550
		601058012	1	370		91108 0050	1	600
		600050010	1	380		91011 0000	2	610
		640060020	2	390		91124 0389	1	620
		991290010	1	400		60004 0012	1	621
		991290016	1	405		99126 0028	1	622
		600050014	4	410		91116 0027	1	623
		610110308	1	420		91122 0003	1	630
		600041006	1	450		60003 0006	2	640
		650242004	2	460		91148 0377	1	650
		991350000	1	480		60004 1016	2	660
		659233093	1	500		91148 0384	2	655
		659232118	1	510		63010 4104	2	665
		659230121	1	520		Personal. **L_G00-Y**		
		791190002	1	530		**98146 3107**	**1**	**1000**
		791210002	1	540		**98145 2031**	**1**	**1010**
		600050012	2	560		99951 0700	1	1030
		620081030	1	570		91130 0327	1	1040
		600052010	1	580		60008 1025	1	1055
		911090007	1	590		60004 0010	1	1058
		991160033	2	670		**98127 4410**	**1**	**1060**
		600050020	1	680		**91134 0177**	**1**	**1070**
		610101005	1	690		**91133 0200**	**1**	**1075**
						91035 0002	1	1080
						20108 0061	1	1082
						60003 0008	1	1085
						60004 0016	2	1090
						91145 0025	1	1095
						91141 0329	1	1096
						60004 0010	1	1097
						62104 0010	1	1098
						60004 0016	2	1100


REV	DATE	DESCRIPTION	REQUIRED	FITMENT


Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069


L_BLK00-RYP


ATTENZIONE: la protezione in gomma (rif. 295) tra le ghiere ed il corpo del miniapplicatore deve essere rimossa prima dell' utilizzo dell' attrezzo.
ATTENTION: the rubber protection (ref. 295) between the ram and the applicator it must be removed before using.

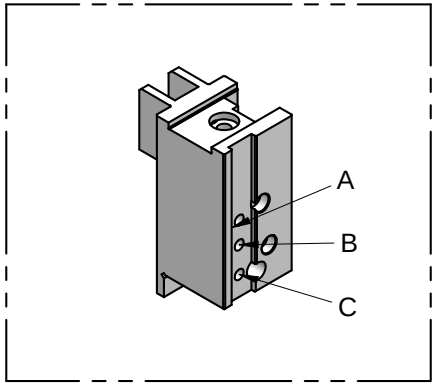










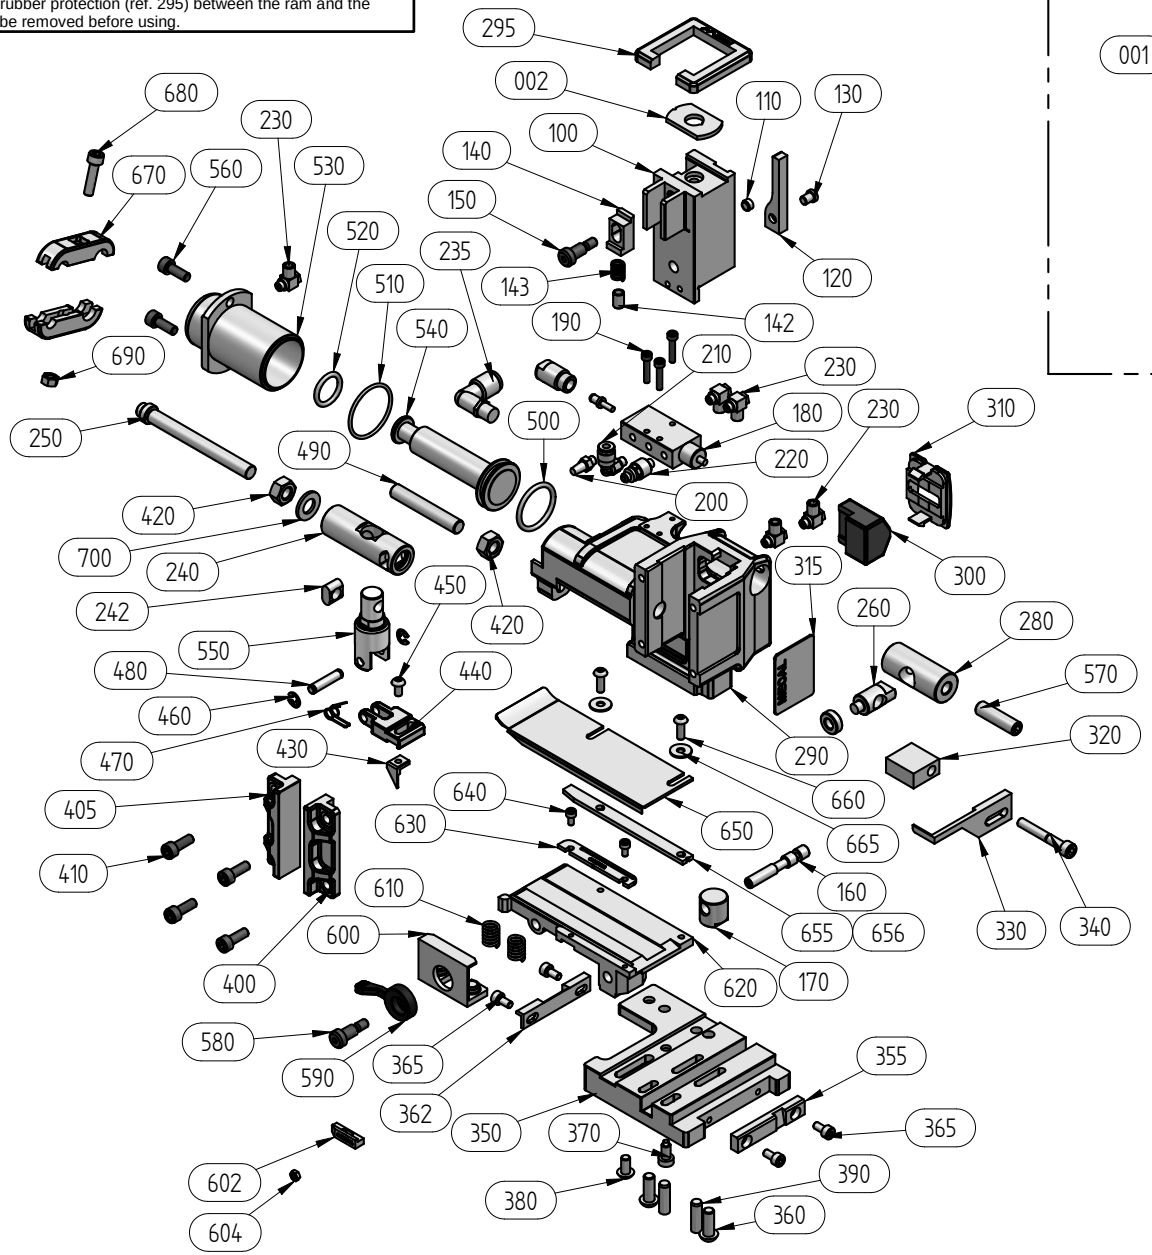

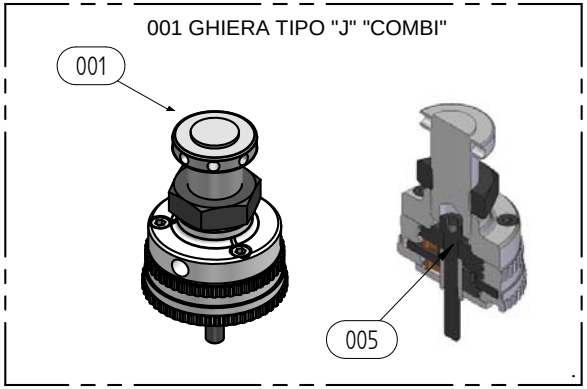

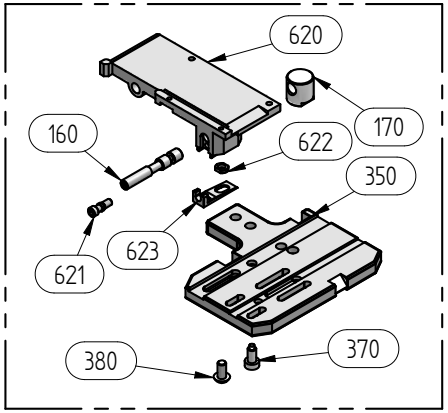

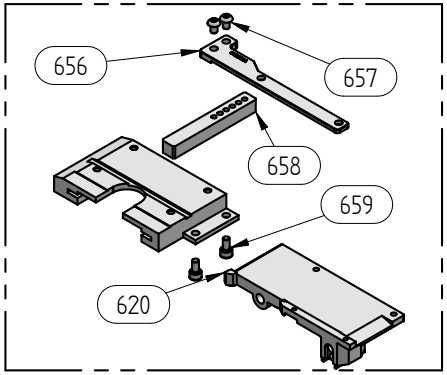

Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069

L_G00-Y

