PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E322







TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72168297 SEQUENCE Nº 9





Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7216-8297-02	*	**04 SIDE FEED**	**YSD-PO 25ENG/2017**	*

Anvil			Wire Crimper		Insulation Crimper	
7216-8297XAC		(N)	7216-8297XW	(N)	7216-8297XIC	(N)
CW (c) 2.42	*CW (i)* 3.70		*CW* 2.40		*CW* 3.70	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

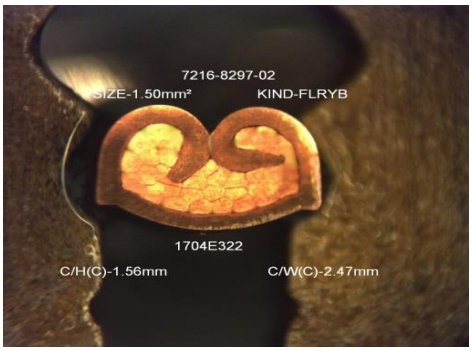
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

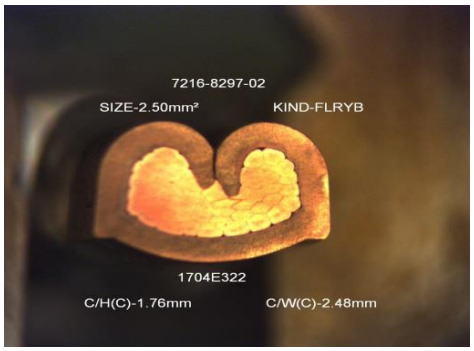
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.55	1.55	4.63
	+/-0,05		

	NOMINAL	AVERAGE	Cmk
mm	1.75	1.75	4.83
	+/-0,05		

REMARKS:

Aplicable wire range 1.50mm²~2.50mm²
Wire 1.50mm² C/W(I)-3.69mm
Wire 2.50mm² C/W(I)-3.72mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2017-mai-09	Date: 2017-mai-08	Date: 2017-mai-08

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E322

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 1,5 mm^2

Nominal Cr. Height:	1.55	2.8	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.543	2.808
2	1.540	2.804
3	1.554	2.803
4	1.553	2.800
5	1.556	2.799
6	1.550	2.799
7	1.552	2.798
8	1.550	2.797
9	1.550	2.797
10	1.548	2.796
11	1.547	2.794
12	1.551	2.795
13	1.544	2.796
14	1.552	2.794
15	1.552	2.795
16	1.551	2.792
17	1.547	2.792
18	1.550	2.794
19	1.548	2.796
20	1.548	2.799
21	1.550	2.799
22	1.549	2.797
23	1.553	2.794
24	1.552	2.792
25	1.552	2.796
26	1.547	2.794
27	1.551	2.790
28	1.553	2.791
29	1.550	2.790
30	1.550	2.789
31	1.551	2.787
32	1.551	2.792
33	1.549	2.794
34	1.551	2.788
35	1.550	2.790
36	1.552	2.790
37	1.549	2.790
38	1.549	2.788
39	1.551	2.791
40	1.549	2.791
41	1.545	2.795
42	1.550	2.798
43	1.544	2.792
44	1.553	2.794
45	1.544	2.794
46	1.545	2.795
47	1.543	2.788
48	1.540	2.794
49	1.548	2.794
50	1.544	2.794
Average	1.55	2.79
Cmk	4.63	7.37

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 2,5 mm^2

Nominal Cr. Height:	1.75	2.9	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.748	2.904
2	1.754	2.904
3	1.748	2.904
4	1.754	2.905
5	1.750	2.905
6	1.755	2.905
7	1.750	2.902
8	1.752	2.904
9	1.750	2.897
10	1.752	2.904
11	1.750	2.905
12	1.753	2.894
13	1.753	2.897
14	1.753	2.896
15	1.754	2.893
16	1.751	2.900
17	1.751	2.904
18	1.750	2.903
19	1.752	2.908
20	1.755	2.901
21	1.749	2.904
22	1.748	2.896
23	1.747	2.909
24	1.745	2.898
25	1.745	2.900
26	1.750	2.903
27	1.747	2.905
28	1.750	2.902
29	1.750	2.913
30	1.745	2.903
31	1.747	2.901
32	1.748	2.900
33	1.749	2.899
34	1.749	2.898
35	1.748	2.904
36	1.751	2.907
37	1.747	2.904
38	1.748	2.907
39	1.748	2.900
40	1.751	2.898
41	1.750	2.909
42	1.751	2.901
43	1.753	2.903
44	1.744	2.903
45	1.739	2.902
46	1.755	2.903
47	1.742	2.915
48	1.744	2.901
49	1.752	2.904
50	1.752	2.898
Average	1.75	2.90
Cmk	4.83	7.53

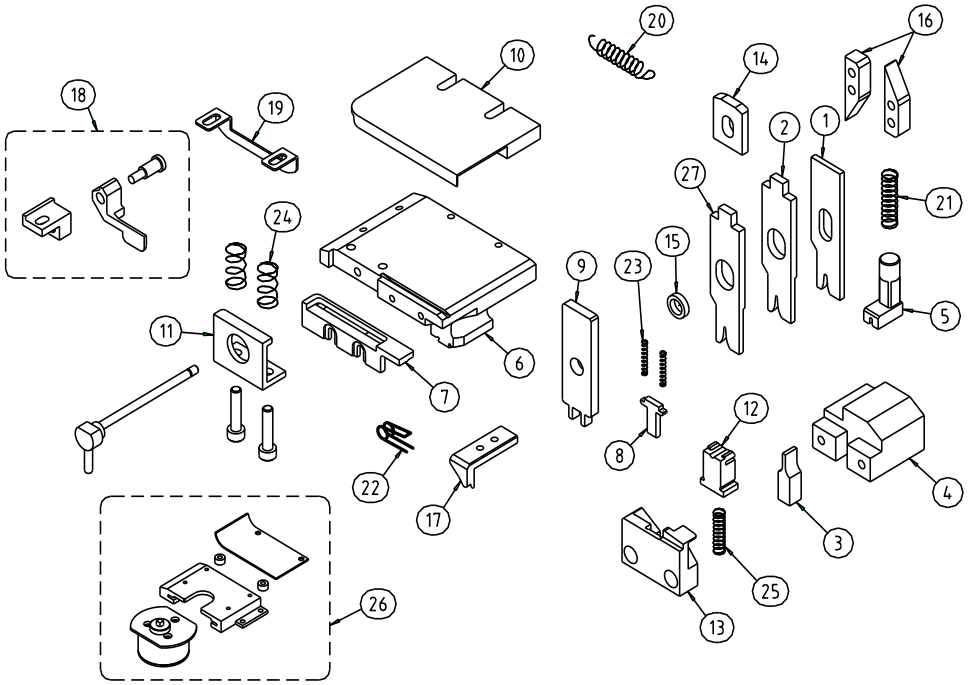
Acceptance criteria: Cmk>= 2

Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-4909	TERMINAL No. 端子品番	7216-8297 C
共通品番	– –	– –	– –



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7216-8297XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	-001	FEEDING CLAW 送り爪
2	7216-8297XIC		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7216-8297XAC		ANVIL アンビル	19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
4	7216-8297XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	~~7216-8297XYY~~		~~SUPPORTING STOPPER サポーティングストッパー~~	21	~~48A47032~~	~~-001~~	~~SUPPORTING STOPPER SPRING サポーティングストッパースプリング~~
6	7216-8297XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7216-8297XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレートスプリング
10	48A47020	-A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7216-8297XKP		BRACKET ブラケット
12	48A47024	-002	SHEARBLADE シャープレード	27	~~7216-8297XQ~~		~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	-001	OUTER SHEARBLADE アウターシャープレード	〈OPTION オプション〉			
14	48A19007	-026	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャープレード
15	48A19019	-013	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-001	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					YWTC		
					DESIGNED DATE 設計日		
					23-09-2009		
					APPROVED 承認	DESIGNED 設計	
					T,Maki	C.Almeida	
					23-09-2009	23-09-2009	