PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E323

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71142575 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7114-2575-06	*	**04 SIDE FEED**	**YSD-PO 25ENG / 2017**	*







Anvil		
7114-2575XA		(N)
CW (c) 1.97	*CW (i)* 2.45	






Wire Crimper		
7114-2575XW		(N)
CW 1.95		

Insulation Crimper		
7114-2575XI		(N)
CW 2.45		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

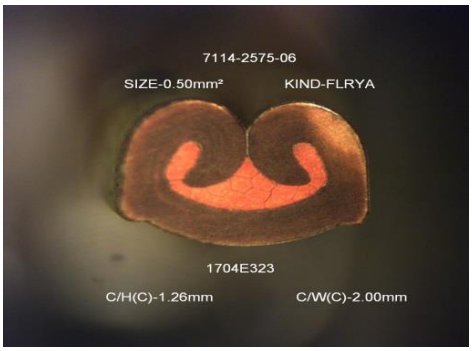
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.25	1.24	4.27
	+/-0,05		



	NOMINAL	AVERAGE	Cmk
mm	1.4	1.40	4.32
	+/-0,05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm²
Wire 0.50mm² C/W(I)-2.36mm
Wire 1.00mm² C/W(I)-2.46mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
		
Date: 2017-mai-10	Date: 2017-mai-10	Date: 2017-mai-10

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E323

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1.25	2	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.251	1.998
2	1.248	2.000
3	1.249	1.999
4	1.251	1.996
5	1.251	1.998
6	1.250	1.999
7	1.247	1.999
8	1.248	2.000
9	1.244	1.996
10	1.244	1.995
11	1.245	1.997
12	1.245	1.996
13	1.244	1.997
14	1.247	1.998
15	1.247	1.999
16	1.245	1.995
17	1.245	1.994
18	1.242	1.995
19	1.241	1.992
20	1.244	1.991
21	1.239	1.989
22	1.244	1.988
23	1.242	1.986
24	1.237	1.989
25	1.237	1.987
26	1.238	1.989
27	1.237	1.989
28	1.243	1.992
29	1.246	1.992
30	1.242	1.992
31	1.247	1.992
32	1.246	1.990
33	1.249	1.991
34	1.249	1.989
35	1.248	1.989
36	1.246	1.989
37	1.246	1.988
38	1.246	1.988
39	1.247	1.986
40	1.247	1.986
41	1.245	1.987
42	1.243	1.987
43	1.245	1.986
44	1.244	1.987
45	1.244	1.987
46	1.243	1.987
47	1.243	1.989
48	1.243	1.990
49	1.241	1.985
50	1.245	1.990
Average	1.24	1.99
Cmk	4.27	6.65

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1.4	2.4	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.398	2.403
2	1.400	2.403
3	1.402	2.399
4	1.400	2.400
5	1.399	2.401
6	1.392	2.401
7	1.394	2.400
8	1.391	2.400
9	1.391	2.400
10	1.396	2.402
11	1.394	2.398
12	1.391	2.402
13	1.387	2.405
14	1.387	2.402
15	1.394	2.392
16	1.392	2.395
17	1.397	2.402
18	1.397	2.402
19	1.399	2.402
20	1.397	2.402
21	1.397	2.402
22	1.395	2.400
23	1.395	2.396
24	1.398	2.397
25	1.403	2.399
26	1.400	2.398
27	1.400	2.398
28	1.399	2.391
29	1.398	2.391
30	1.398	2.398
31	1.398	2.397
32	1.399	2.396
33	1.398	2.397
34	1.393	2.393
35	1.395	2.393
36	1.393	2.392
37	1.397	2.392
38	1.397	2.392
39	1.395	2.394
40	1.395	2.394
41	1.395	2.394
42	1.395	2.393
43	1.395	2.393
44	1.394	2.393
45	1.394	2.393
46	1.393	2.393
47	1.391	2.393
48	1.391	2.393
49	1.399	2.393
50	1.392	2.393
Average	1.40	2.40
Cmk	4.32	7.98

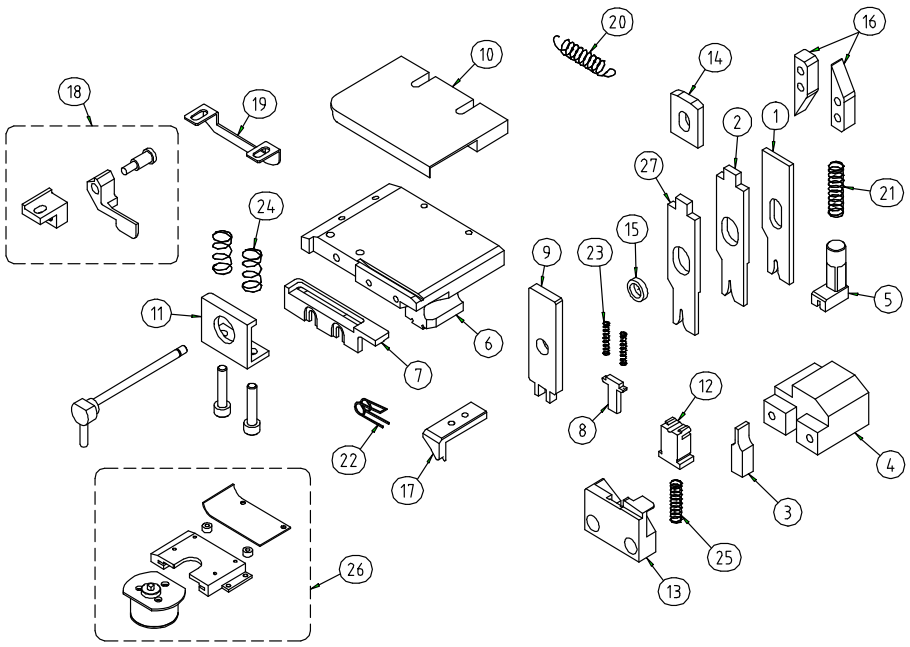
Acceptance criteria: Cmk>= 2

Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-4477	TERMINAL No. 端子品番	7114-2575
Common PN 共通品番	–	–	–
	–	–	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7114-2575XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7114-2575XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7114-2575XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7114-2575XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7114-2575XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7114-2575XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7114-2575XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7114-2575XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	021 ①	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	7114-2575XP ①		OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	021	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	7214-1841XP-B		OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
15	48A19019	030	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
①	2008/3/4	CHANGED PARTS No,	08C-005	T,Suzuki

APPRICATION POST 申請部署	
HIB	
DESIGNED DATE 設計日	
2008/1/29	
APPROVED 承認	DESIGNED 設計
T,Maki	T,Suzuki
2008/1/29	2008/1/29

ISSUED 発行

ISSUE
2013 / 10 / 12
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.