PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E325





TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71142575 SEQUENCE Nº 9






Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7114-2575-06	*	**04 SIDE FEED**	**YSD-PO 25ENG / 2017**	*

Anvil			Wire Crimper			Insulation Crimper		
7114-2575XA		(N)	7114-2575XW		(N)	7114-2575XI		(N)
CW (c)	1.97	*CW (i)* 2.45	*CW*	1.95		*CW*	2.45	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

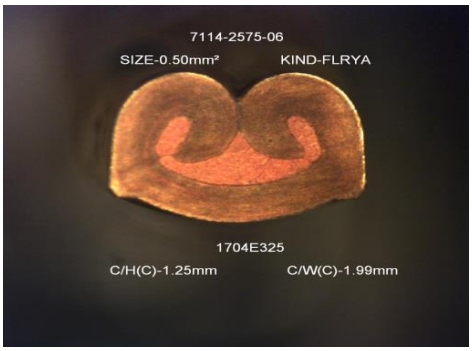
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

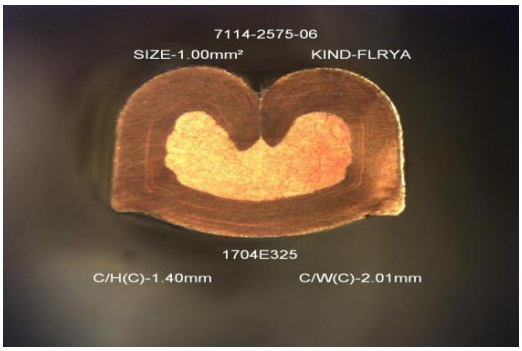
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.25	1.25	4.89
	+/-0,05		

	NOMINAL	AVERAGE	Cmk
mm	1.4	1.40	4.79
	+/-0,05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm²
Wire 0.50mm² C/W(I)-2.35mm
Wire 1.00mm² C/W(I)-2.46mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2017-mai-10	Date: 2017-mai-10	Date: 2017-mai-10

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E325

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1.25	2	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.251	2.000
2	1.255	2.001
3	1.246	2.007
4	1.247	2.004
5	1.249	2.005
6	1.244	2.004
7	1.239	2.010
8	1.247	2.007
9	1.249	2.004
10	1.254	2.011
11	1.250	2.013
12	1.255	2.013
13	1.252	2.006
14	1.254	2.006
15	1.255	2.005
16	1.252	2.009
17	1.252	2.008
18	1.254	2.011
19	1.253	2.016
20	1.255	2.014
21	1.253	2.009
22	1.255	2.014
23	1.252	2.014
24	1.255	2.013
25	1.250	2.009
26	1.250	2.015
27	1.251	2.014
28	1.255	2.014
29	1.253	2.015
30	1.250	2.015
31	1.252	2.015
32	1.255	2.013
33	1.253	2.013
34	1.254	2.010
35	1.255	2.011
36	1.251	2.006
37	1.255	2.003
38	1.254	2.004
39	1.253	2.003
40	1.254	2.003
41	1.254	2.005
42	1.253	2.007
43	1.250	2.007
44	1.249	2.006
45	1.248	2.010
46	1.251	2.007
47	1.253	2.007
48	1.250	2.009
49	1.250	2.010
50	1.247	2.007
Average	1.25	2.01
Cmk	4.89	7.18

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1.4	2.4	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.398	2.404
2	1.401	2.401
3	1.403	2.399
4	1.403	2.403
5	1.404	2.403
6	1.402	2.394
7	1.401	2.392
8	1.403	2.402
9	1.404	2.402
10	1.400	2.403
11	1.402	2.405
12	1.406	2.398
13	1.404	2.396
14	1.399	2.401
15	1.399	2.400
16	1.397	2.402
17	1.395	2.400
18	1.405	2.398
19	1.400	2.398
20	1.402	2.402
21	1.401	2.406
22	1.404	2.403
23	1.404	2.404
24	1.404	2.398
25	1.400	2.400
26	1.402	2.395
27	1.405	2.402
28	1.403	2.409
29	1.402	2.409
30	1.398	2.404
31	1.405	2.398
32	1.399	2.395
33	1.404	2.399
34	1.398	2.394
35	1.403	2.398
36	1.401	2.396
37	1.397	2.394
38	1.407	2.393
39	1.407	2.392
40	1.405	2.400
41	1.404	2.400
42	1.406	2.398
43	1.408	2.395
44	1.400	2.399
45	1.400	2.395
46	1.396	2.392
47	1.405	2.391
48	1.396	2.394
49	1.393	2.398
50	1.399	2.398
Average	1.40	2.40
Cmk	4.79	7.62

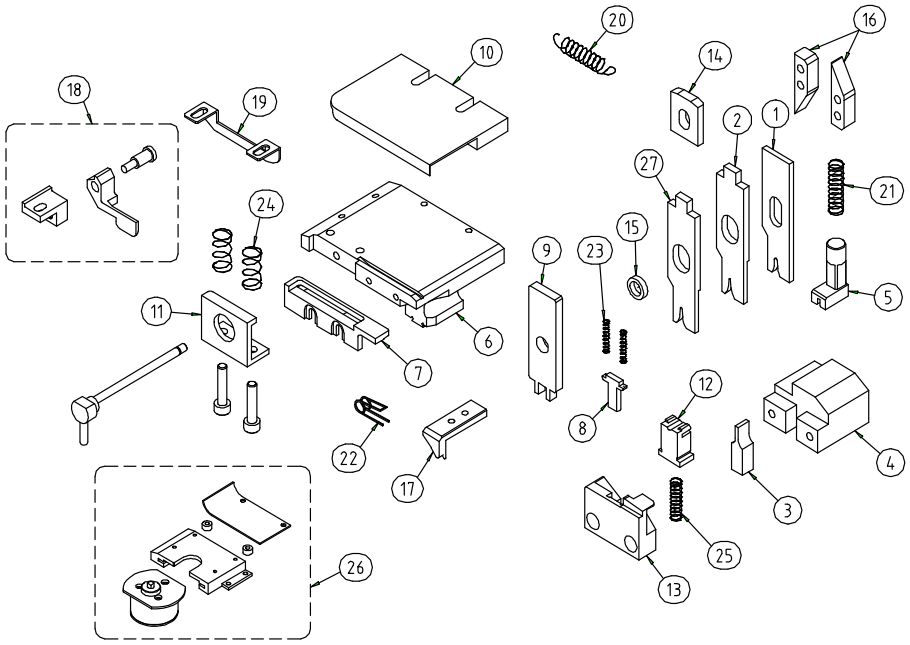
Acceptance criteria: Cmk>= 2

Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-4477	TERMINAL No. 端子品番	7114-2575
Common PN 共通品番	–	–	–
	–	–	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7114-2575XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7114-2575XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7114-2575XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7114-2575XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7114-2575XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7114-2575XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7114-2575XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7114-2575XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	021 ①	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	7114-2575XP ①		OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	021	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	7214-1841XP-B		OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
15	48A19019	030	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計
①	2008/3/4	CHANGED PARTS No,	08C-005	T,Suzuki	T,Maki	T,Suzuki

APPRICATION POST 申請部署: HIB

DESIGNED DATE 設計日: 2008/1/29

ISSUED 発行: 2008/1/29

ISSUE 2013 / 10 / 12
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.