PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E326

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71169529 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-9529-02	*	**04 SIDE FEED**	**YSD-PO 25ENG/2017**	*







Anvil		
7116-9529XA		(N)
CW (c) 1,62	*CW (i)* 2,40	






Wire Crimper	
7116-9529XW	(1)
CW 1,60	

Insulation Crimper	
7116-9529XI	(1)
CW 2,40	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

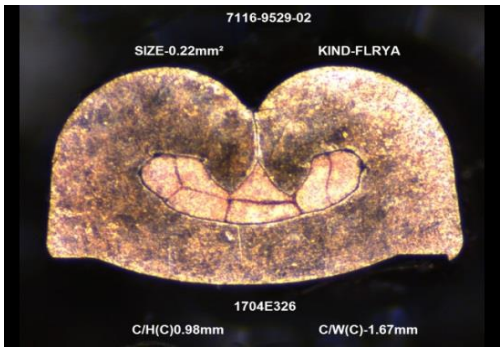
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

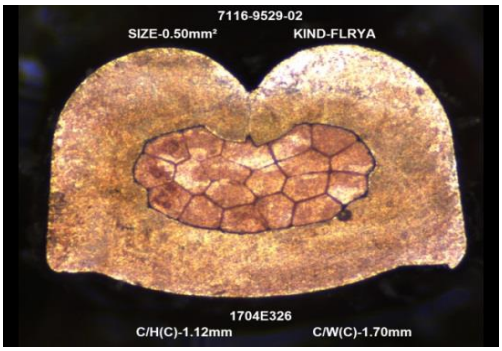
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.98	0.98	2.49
	+/-0.03		

	NOMINAL	AVERAGE	Cmk
mm	1.12	1.12	2.60
	+/-0.05		

REMARKS:

Aplicable wire range 0.20mm² ~ 0.50mm².
Section 0.20mm² not prepared due the miss wire samples.
Size 0.22mm² C/W(I)-2.00mm
Size 0.50mm² C/W(I)-2.11mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18597
		Rui Domingues
Date: 2017-mai-09	Date: 2017-mai-08	Date: 2017-mai-08

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E326

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0.22 mm^2

Nominal Cr. Height:	0.98	1.7	mm
+/-	0.03	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.980	1.697
2	0.985	1.701
3	0.974	1.704
4	0.982	1.696
5	0.976	1.696
6	0.983	1.697
7	0.980	1.704
8	0.985	1.691
9	0.980	1.700
10	0.976	1.696
11	0.982	1.700
12	0.978	1.696
13	0.984	1.701
14	0.984	1.699
15	0.978	1.698
16	0.983	1.703
17	0.987	1.702
18	0.981	1.706
19	0.976	1.700
20	0.988	1.708
21	0.977	1.709
22	0.992	1.708
23	0.987	1.709
24	0.991	1.703
25	0.984	1.703
26	0.981	1.704
27	0.981	1.702
28	0.978	1.705
29	0.983	1.699
30	0.978	1.702
31	0.977	1.702
32	0.980	1.703
33	0.978	1.698
34	0.982	1.698
35	0.984	1.702
36	0.981	1.697
37	0.978	1.703
38	0.978	1.699
39	0.981	1.700
40	0.974	1.702
41	0.980	1.702
42	0.982	1.704
43	0.982	1.696
44	0.978	1.699
45	0.978	1.703
46	0.979	1.707
47	0.979	1.710
48	0.979	1.686
49	0.978	1.684
50	0.977	1.699
Average	0.98	1.70
Cmk	2.49	6.47

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0.5 mm^2

Nominal Cr. Height:	1.12	1.9	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.119	1.900
2	1.122	1.902
3	1.123	1.894
4	1.120	1.893
5	1.114	1.893
6	1.116	1.904
7	1.115	1.905
8	1.114	1.899
9	1.117	1.896
10	1.117	1.900
11	1.118	1.897
12	1.121	1.900
13	1.119	1.902
14	1.117	1.899
15	1.122	1.900
16	1.121	1.904
17	1.116	1.898
18	1.121	1.902
19	1.119	1.898
20	1.122	1.899
21	1.120	1.899
22	1.120	1.903
23	1.127	1.900
24	1.127	1.909
25	1.120	1.897
26	1.129	1.909
27	1.125	1.900
28	1.117	1.902
29	1.124	1.902
30	1.116	1.897
31	1.120	1.897
32	1.120	1.897
33	1.126	1.902
34	1.125	1.896
35	1.117	1.888
36	1.124	1.900
37	1.114	1.905
38	1.125	1.901
39	1.125	1.890
40	1.127	1.907
41	1.126	1.895
42	1.121	1.888
43	1.125	1.888
44	1.119	1.898
45	1.125	1.897
46	1.099	1.897
47	1.103	1.894
48	1.119	1.894
49	1.135	1.901
50	1.137	1.901
Average	1.12	1.90
Cmk	2.60	6.86

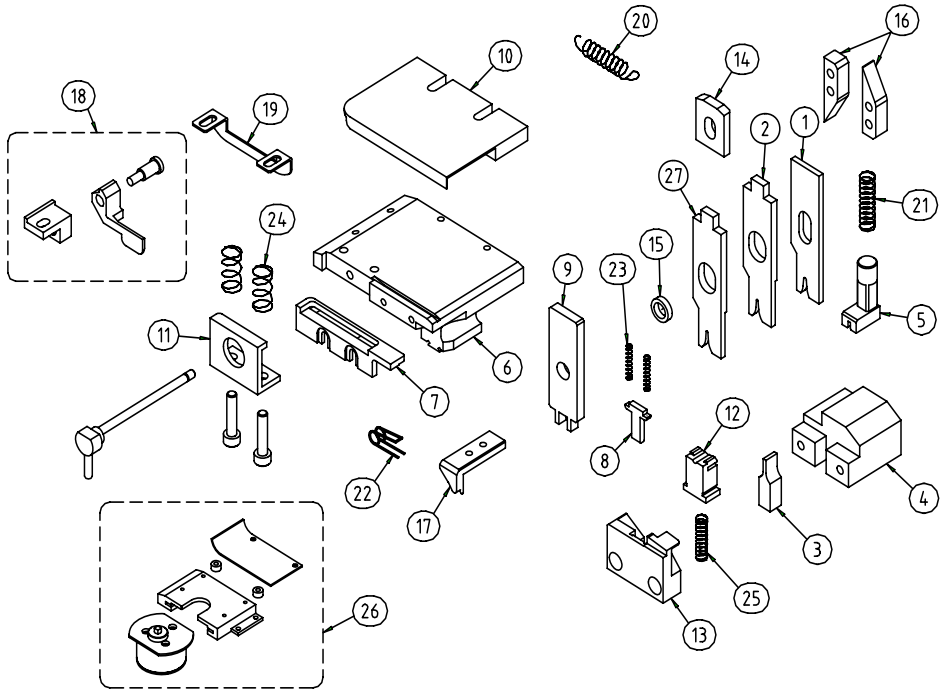
Acceptance criteria: Cmk>= 2

Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-1675	TERMINAL No. 端子品番	7116-9529



No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称	No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
1	7116-9529XW		WIRE CRIMPER ワイヤークリンパー	16	48A47014	001	FEEDING CAM 送りカム
2	7116-9529XI		INSULATION CRIMPER インシュレーションクリンパー	17	48A47013		FEEDING CLAW 送り爪
3	7116-9529XA		ANVIL アンビル	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
4	7116-9529XJE		ANVIL HOLDER アンビルホルダー	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
5	7116-9529XYY		SUPPORTING STOPPER サポーティングストッパー	20	48A47031		RETURN SPRING 戻しスプリング
6	7116-9529XYB		BASE ベース	21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
7	7116-9529XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
8	48A47016	001	WIRE HOLDER 電線押さえ	23	48A19023	001	WIRE HOLDER SPRING 電線押さえスプリング
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
10	48A47020	A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	25	48A19050		SHEARBLADE SPRING シャープレードスプリング
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
12	48A47024	001	SHEARBLADE シャープレード		7116-9529XKP		BRACKET ブラケット
13	48A47025	001/101	OUTER SHEARBLADE アウターシャープレード	27	-		~~STABILIZER CRIMPER~~ ~~スタビライザークリンパー~~
14	48A19007	027	INSULATION ADJUSTING PIECE インシュレーション調整コマ	〈オプション OPTION〉			
15	48A19019	035	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署	
PTC	
DESIGNED DATE 設計日	
2006/12/15	
APPROVED 承認	DESIGNED 設計
K.Hiraguchi	T.Suzuki
2006/12/15	2006/12/15

ISSUE
2013/11/25
YAZAKI PARTS CO.LTD HAIBARA OFFICE

ISSUED
発行