PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E354






TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71168012 SEQUENCE Nº 9





Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-8012-06	*	**04 SIDE FEED**	**YSD-PO 25ENG/2017_1**	*

Anvil			Wire Crimper		Insulation Crimper	
7116-8012XAC		(N)	7116-8012XW	(N)	7116-8012XIC	(N)
CW (c) 2.05	*CW (i)* 2.54		*CW* 2.03		*CW* 2.54	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

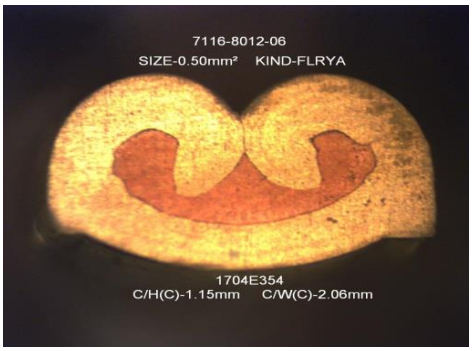
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.15	1.15	3.21
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.35	1.36	3.15
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm².
Size 0.50mm² C/W(I)-2.55mm
Size 1.00mm² C/W(I)-2.58mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
		Vitor Hugo
Date: 2017-mai-09	Date: 2017-mai-06	Date: 2017-mai-05

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E354

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0.5 mm^2

Nominal Cr. Height:	1.15	2.2	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.151	2.204
2	1.158	2.214
3	1.152	2.203
4	1.159	2.212
5	1.163	2.210
6	1.158	2.209
7	1.155	2.212
8	1.163	2.205
9	1.163	2.203
10	1.160	2.209
11	1.150	2.218
12	1.147	2.208
13	1.157	2.203
14	1.159	2.211
15	1.152	2.217
16	1.147	2.206
17	1.155	2.200
18	1.160	2.203
19	1.159	2.212
20	1.146	2.213
21	1.151	2.203
22	1.155	2.200
23	1.158	2.209
24	1.155	2.213
25	1.146	2.207
26	1.152	2.199
27	1.156	2.206
28	1.154	2.207
29	1.155	2.210
30	1.158	2.201
31	1.159	2.204
32	1.160	2.207
33	1.151	2.208
34	1.156	2.202
35	1.152	2.207
36	1.148	2.213
37	1.148	2.213
38	1.155	2.209
39	1.157	2.202
40	1.152	2.214
41	1.148	2.208
42	1.159	2.201
43	1.161	2.205
44	1.153	2.214
45	1.151	2.204
46	1.150	2.199
47	1.158	2.208
48	1.160	2.217
49	1.153	2.208
50	1.151	2.205
Average	1.15	2.21
Cmk	3.21	6.23

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1.35	2.6	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.356	2.606
2	1.360	2.597
3	1.361	2.602
4	1.352	2.607
5	1.351	2.599
6	1.356	2.604
7	1.349	2.607
8	1.357	2.599
9	1.364	2.595
10	1.356	2.601
11	1.354	2.606
12	1.356	2.603
13	1.365	2.597
14	1.360	2.601
15	1.355	2.607
16	1.363	2.611
17	1.367	2.592
18	1.358	2.600
19	1.355	2.605
20	1.357	2.595
21	1.364	2.601
22	1.367	2.603
23	1.358	2.595
24	1.357	2.601
25	1.356	2.606
26	1.363	2.596
27	1.365	2.603
28	1.358	2.608
29	1.353	2.604
30	1.353	2.596
31	1.358	2.603
32	1.363	2.608
33	1.358	2.597
34	1.356	2.605
35	1.360	2.609
36	1.364	2.608
37	1.356	2.597
38	1.354	2.601
39	1.354	2.610
40	1.361	2.596
41	1.364	2.600
42	1.357	2.605
43	1.355	2.602
44	1.356	2.598
45	1.364	2.601
46	1.356	2.604
47	1.354	2.608
48	1.362	2.597
49	1.364	2.595
50	1.354	2.601
Average	1.36	2.60
Cmk	3.15	6.97

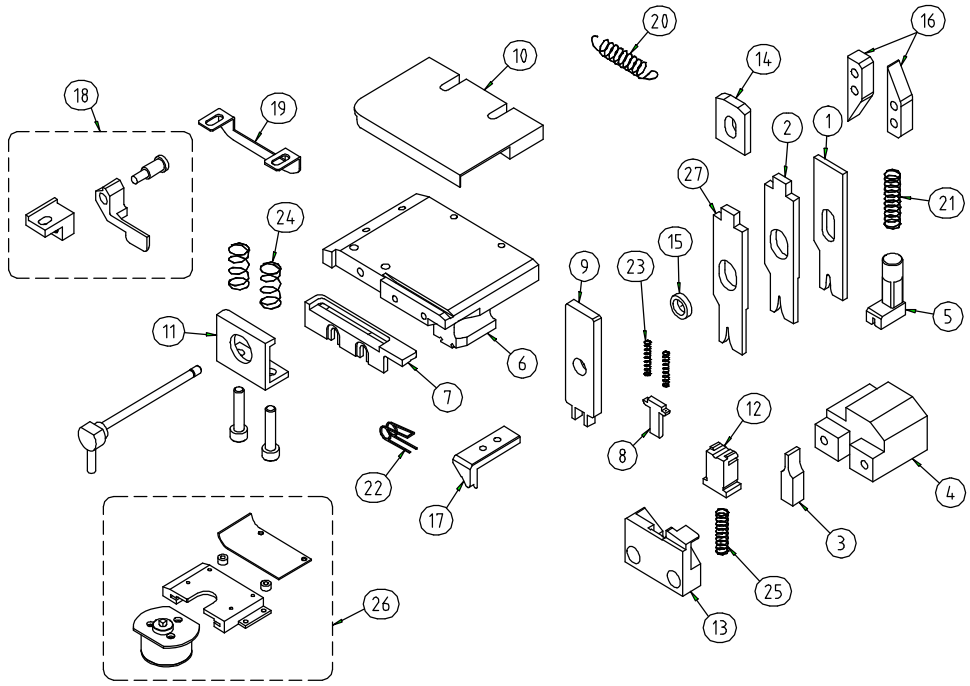
Acceptance criteria: Cmk>= 2

Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-4481	TERMINAL No. 端子品番	7116-8012C
Common PN 共通品番	–	–	–
	–	–	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-8012XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-8012XIC		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-8012XAC		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	002	TERMINAL SCRAPER 端子掻き落とし
4	7116-8012XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-8012XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-8012XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-8012XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	002	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-8012XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	025	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	013	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					HIB		ISSUED '12.04.20 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.
					DESIGNED DATE 設計日		
					2008/1/31		
					APPROVED 承認	DESIGNED 設計	
					T,Maki	T,Suzuki	
					2008/1/31	2008/1/31	