PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E357












TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71168012 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-8012-06	*	**04 SIDE FEED**	**YSD-PO 25ENG/2017_1**	*

Anvil			Wire Crimper		Insulation Crimper	
7116-8012XAC		(N)	7116-8012XW	(N)	7116-8012XIC	(N)
CW (c) 2.05	*CW (i)* 2.54		*CW* 2.03		*CW* 2.54	

1 - VISUAL CHECK ITEMS


O - ok **X** - ng **NA** - not aplicable


	The two sides of the insulation grips are in the correct position.	**O**		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**O**		The dimension of the cutting carrier is within the spec.**(*)**	**O**
	The lance height and shape are not deformed.	**O**		Bend up is within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**O**		Bend down is within the criteria**(*)**	**O**
	Not found any crack in the terminal.	**O**		The terminal is not bent sideway, looking from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

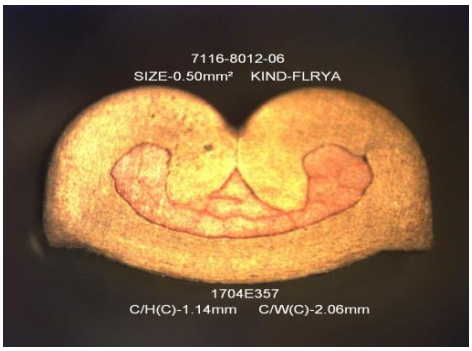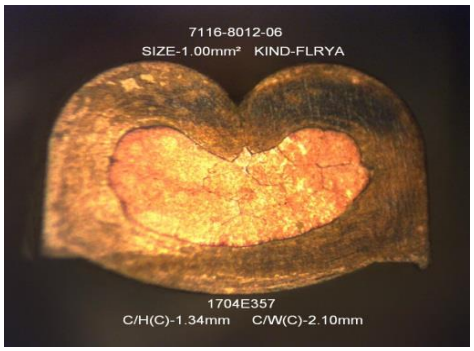2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.15	1.15	3.96
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.35	1.36	3.29
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm².
Size 0.50mm² C/W(I)-2.53mm
Size 1.00mm² C/W(I)-2.58mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
		Vitor Hugo
Date: 2017-mai-09	Date: 2017-mai-06	Date: 2017-mai-06

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E357

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0.5 mm^2

Nominal Cr. Height:	1.15	2.2	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.151	2.201
2	1.151	2.199
3	1.155	2.202
4	1.155	2.211
5	1.149	2.204
6	1.150	2.211
7	1.156	2.209
8	1.148	2.204
9	1.152	2.206
10	1.157	2.212
11	1.157	2.204
12	1.157	2.209
13	1.154	2.213
14	1.157	2.211
15	1.157	2.203
16	1.151	2.203
17	1.157	2.213
18	1.158	2.203
19	1.154	2.202
20	1.149	2.214
21	1.155	2.209
22	1.158	2.199
23	1.151	2.197
24	1.154	2.205
25	1.158	2.211
26	1.153	2.201
27	1.149	2.200
28	1.154	2.209
29	1.158	2.201
30	1.153	2.199
31	1.150	2.205
32	1.158	2.208
33	1.161	2.201
34	1.150	2.206
35	1.159	2.211
36	1.160	2.206
37	1.150	2.198
38	1.161	2.207
39	1.154	2.210
40	1.152	2.199
41	1.158	2.204
42	1.161	2.211
43	1.154	2.198
44	1.159	2.204
45	1.160	2.204
46	1.152	2.198
47	1.149	2.199
48	1.149	2.205
49	1.157	2.207
50	1.159	2.201
Average	1.15	2.20
Cmk	3.96	6.64

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1.35	2.6	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.356	2.602
2	1.350	2.606
3	1.356	2.610
4	1.362	2.603
5	1.353	2.610
6	1.358	2.604
7	1.362	2.602
8	1.362	2.606
9	1.353	2.610
10	1.357	2.604
11	1.360	2.602
12	1.362	2.605
13	1.359	2.609
14	1.353	2.613
15	1.357	2.606
16	1.364	2.600
17	1.359	2.614
18	1.356	2.616
19	1.361	2.610
20	1.364	2.604
21	1.361	2.609
22	1.361	2.615
23	1.366	2.612
24	1.362	2.605
25	1.356	2.604
26	1.350	2.614
27	1.350	2.607
28	1.357	2.604
29	1.360	2.612
30	1.354	2.614
31	1.350	2.606
32	1.352	2.602
33	1.356	2.604
34	1.361	2.613
35	1.351	2.612
36	1.349	2.604
37	1.354	2.611
38	1.362	2.614
39	1.356	2.616
40	1.350	2.607
41	1.358	2.607
42	1.359	2.616
43	1.354	2.608
44	1.354	2.605
45	1.360	2.612
46	1.354	2.617
47	1.357	2.610
48	1.360	2.606
49	1.353	2.605
50	1.355	2.606
Average	1.36	2.61
Cmk	3.29	6.72


Acceptance criteria: Cmk>= 2

Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-4481	TERMINAL No. 端子品番	7116-8012C
Common PN 共通品番	–	–	–
	–	–	

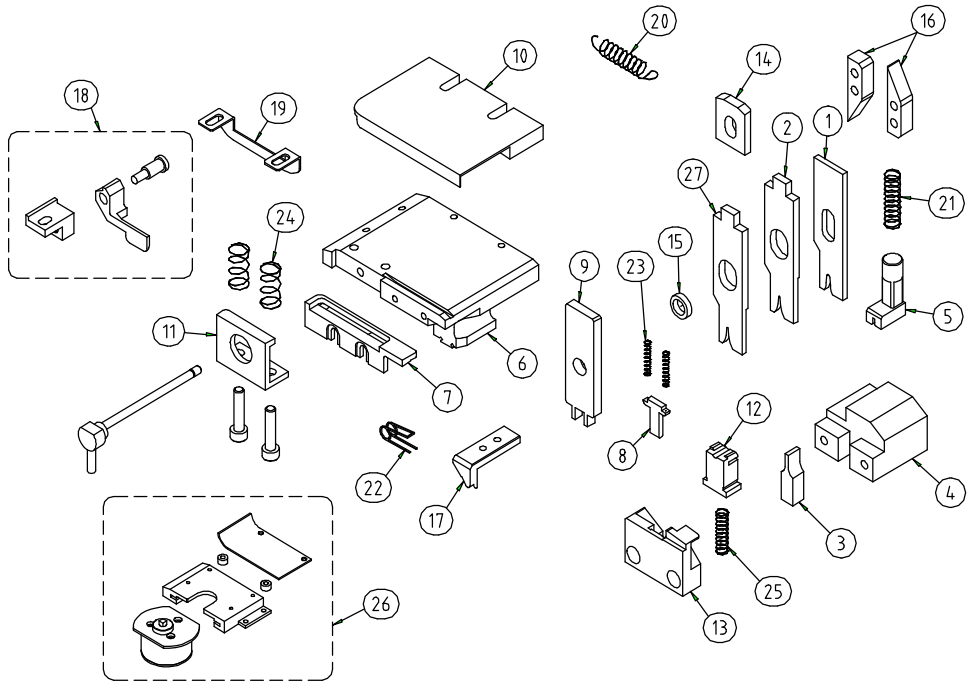

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-8012XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-8012XIC		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-8012XAC		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	002	TERMINAL SCRAPER 端子掻き落とし
4	7116-8012XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-8012XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-8012XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-8012XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	002	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-8012XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	025	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	013	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					HIB		ISSUED '12.04.20 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.
					DESIGNED DATE 設計日		
					2008/1/31		
					APPROVED 承認	DESIGNED 設計	
					T,Maki	T,Suzuki	
					2008/1/31	2008/1/31	