APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1803E045

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164902 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4902-06	*	**04 SIDE FEED**	**YSD_2018_001~008**	*







Anvil		
7116-4902ZZXAC		(N)
CW (c) 2,05	*CW (i)* 2,44	





Wire Crimper	
7116-4902ZZXW	(N)
CW 2,03	

Insulation Crimper	
7116-4902XIC	(1)
CW 2,44	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

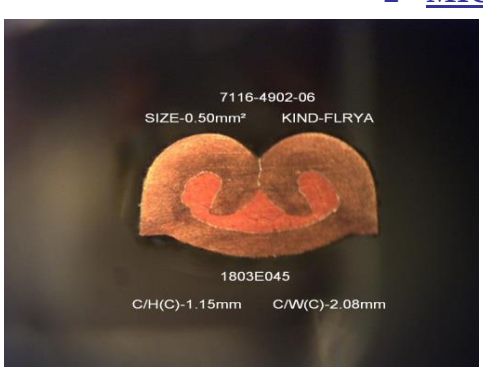
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,15	1,15	4,65
	+/-0,05		



	NOMINAL	AVERAGE	Cmk
mm	1,2	1,20	4,57
	+/-0,05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm²
Wire 0.50mm² C/W(I)-2.52mm
Wire 1.00mm² C/W(I)-2.53mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
		
Date: 2018-mar-22	Date: 2018-mar-20	Date: 2018-mar-20

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1803E045

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1,15	2,1	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,156	2,098
2	1,151	2,100
3	1,154	2,102
4	1,155	2,100
5	1,154	2,099
6	1,154	2,102
7	1,153	2,097
8	1,151	2,100
9	1,151	2,098
10	1,155	2,102
11	1,155	2,099
12	1,155	2,101
13	1,159	2,096
14	1,154	2,101
15	1,153	2,108
16	1,153	2,102
17	1,154	2,104
18	1,155	2,097
19	1,154	2,105
20	1,152	2,092
21	1,154	2,112
22	1,152	2,108
23	1,153	2,103
24	1,153	2,109
25	1,157	2,100
26	1,149	2,094
27	1,163	2,112
28	1,150	2,097
29	1,151	2,100
30	1,157	2,099
31	1,157	2,097
32	1,157	2,094
33	1,154	2,097
34	1,153	2,097
35	1,152	2,097
36	1,151	2,101
37	1,149	2,098
38	1,149	2,102
39	1,153	2,100
40	1,151	2,099
41	1,154	2,095
42	1,158	2,097
43	1,149	2,097
44	1,154	2,096
45	1,162	2,099
46	1,149	2,100
47	1,158	2,097
48	1,159	2,098
49	1,149	2,102
50	1,159	2,096
Average	1,15	2,10
Cmk	4,65	7,80

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1,2	2,5	mm
+/-	0,05	0,1	mm

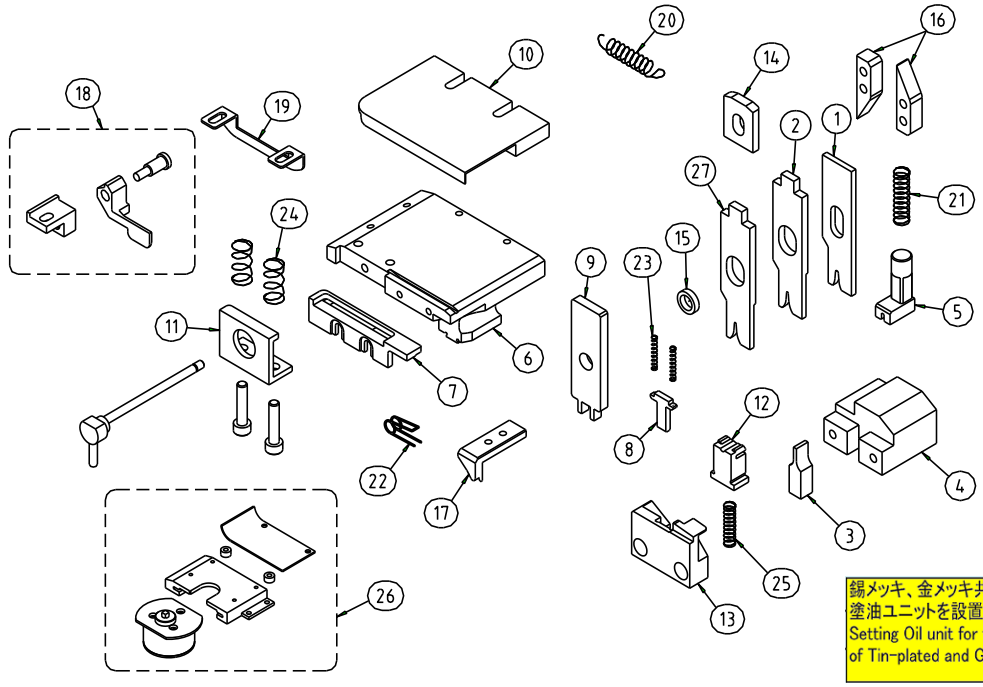
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,199	2,501
2	1,203	2,500
3	1,202	2,499
4	1,198	2,500
5	1,201	2,501
6	1,198	2,498
7	1,199	2,498
8	1,199	2,501
9	1,202	2,503
10	1,197	2,497
11	1,199	2,500
12	1,195	2,498
13	1,196	2,498
14	1,194	2,500
15	1,197	2,498
16	1,196	2,505
17	1,195	2,505
18	1,195	2,504
19	1,191	2,505
20	1,194	2,506
21	1,192	2,503
22	1,193	2,491
23	1,190	2,494
24	1,189	2,501
25	1,188	2,500
26	1,192	2,505
27	1,193	2,495
28	1,195	2,502
29	1,196	2,505
30	1,195	2,506
31	1,196	2,505
32	1,201	2,507
33	1,198	2,505
34	1,202	2,507
35	1,198	2,509
36	1,198	2,504
37	1,200	2,505
38	1,197	2,505
39	1,200	2,504
40	1,197	2,504
41	1,195	2,506
42	1,195	2,508
43	1,195	2,505
44	1,197	2,500
45	1,197	2,502
46	1,195	2,505
47	1,199	2,506
48	1,194	2,504
49	1,194	2,505
50	1,194	2,505
Average	1,20	2,50
Cmk	4,57	8,57

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	ZZ	TERMINAL No. 端子品番	7116-4902 C
共通品番	– – – – – – – –		



錫メッキ、金メッキ共に使用するアプリケータに標準で塗油ユニットを設置する。
Setting Oil unit for the applicator used for both of Tin-plated and Gold-plated terminals as standard.

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4902ZZXW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-4902XIC		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-4902ZZXAC		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7116-4902XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-4902XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-4902XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-4902XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	002	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-4902XKP		BRACKET ブラケット
12	48A47024	001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	022	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	018	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計
N	22-02-2016	New	YWTL	C,F,Almeida	S.Junior	C,F,Almeida

APPRICATION POST 申請部署: YWTL

DESIGNED DATE 設計日: 22-02-2016

APPROVED 承認: 22-02-2016

DESIGNED 設計: 22-02-2016

ISSUED 発行