PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1803E082

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164589 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-4589-02	7158-3154-90	MXDR	4514400057	DAIMLER TRUCK - NCP

Applicable Terminals for this Tool:

7116-4589-02			

Anvil			Wire Crimper			Insulation Crimper		
7116-4589XAD		(N)	7116-4589XW		(1)	7116-4589XID		(1)
CW (c)	1.97	CW (i) 4.00	CW	1.95		CW	4.00	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.4 mm 0.2 - 0.6 mm	0.33		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.25		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.3 mm 0 - 0.3 mm	0.01		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 0.6 mm	0.34		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	1.2		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.5 mm	0.07		The body of the terminal is not twisted.	O


O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

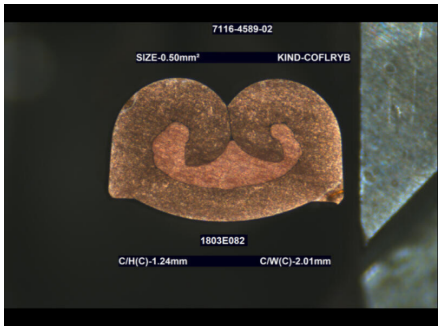



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.25	1.26	4.44
	+/- **0.05**		

	NOMINAL	AVERAGE	Cmk
mm	1.36	1.36	5.14
	+/- **0.05**		

REMARKS:

Applicable wire range 0.50mm²~1.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº33664
Date: 26/06/2026	Date: 24/06/2026	Date: 24/06/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°
1803E082

LOWER WIRE KIND & SIZE

C/W(I): 4.02 mm
Wire kind: COFLRYB
Wire size: 0.50 mm²

Nominal Cr. Height:	1.25	3.8	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.252	3.821
2	1.254	3.821
3	1.255	3.821
4	1.251	3.822
5	1.260	3.822
6	1.256	3.817
7	1.257	3.833
8	1.256	3.827
9	1.261	3.831
10	1.254	3.820
11	1.256	3.827
12	1.245	3.827
13	1.256	3.829
14	1.255	3.825
15	1.261	3.834
16	1.261	3.829
17	1.262	3.834
18	1.255	3.827
19	1.261	3.829
20	1.256	3.824
21	1.258	3.828
22	1.253	3.832
23	1.257	3.824
24	1.257	3.833
25	1.256	3.832
26	1.257	3.836
27	1.258	3.833
28	1.255	3.830
29	1.253	3.836
30	1.263	3.831
31	1.253	3.835
32	1.254	3.835
33	1.260	3.836
34	1.253	3.840
35	1.254	3.831
36	1.254	3.840
37	1.257	3.840
38	1.258	3.833
39	1.261	3.841
40	1.255	3.834
41	1.253	3.838
42	1.261	3.832
43	1.256	3.834
44	1.256	3.840
45	1.252	3.836
46	1.256	3.836
47	1.259	3.836
48	1.257	3.836
49	1.256	3.832
50	1.256	3.837
Average	1.26	3.83
Cmk	4.44	3.86

UPPER WIRE KIND & SIZE

C/W(I): 4.03 mm
Wire kind: T2IRSAPL
Wire size: 1.00 mm²

Nominal Cr. Height:	1.36	4	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.360	4.007
2	1.360	4.005
3	1.357	4.004
4	1.361	4.007
5	1.358	4.005
6	1.359	4.004
7	1.359	4.005
8	1.361	4.010
9	1.357	4.004
10	1.364	4.008
11	1.357	4.004
12	1.355	4.016
13	1.359	4.006
14	1.355	4.016
15	1.359	4.010
16	1.357	4.020
17	1.357	4.016
18	1.354	4.020
19	1.358	4.024
20	1.357	4.017
21	1.358	4.024
22	1.353	4.015
23	1.357	4.025
24	1.361	4.027
25	1.355	4.032
26	1.360	4.019
27	1.360	4.028
28	1.361	4.029
29	1.361	4.030
30	1.361	4.029
31	1.357	4.022
32	1.368	4.020
33	1.360	4.030
34	1.362	4.022
35	1.361	4.029
36	1.367	4.023
37	1.362	4.019
38	1.366	4.029
39	1.363	4.033
40	1.363	4.030
41	1.363	4.026
42	1.363	4.033
43	1.364	4.030
44	1.357	4.033
45	1.364	4.026
46	1.358	4.032
47	1.360	4.030
48	1.358	4.034
49	1.359	4.027
50	1.363	4.033
Average	1.36	4.02
Cmk	5.14	2.67


Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-1553	TERMINAL No. 端子品番	7116-4589DD
共通品番	– / –	– / –	– / –

Rev.1

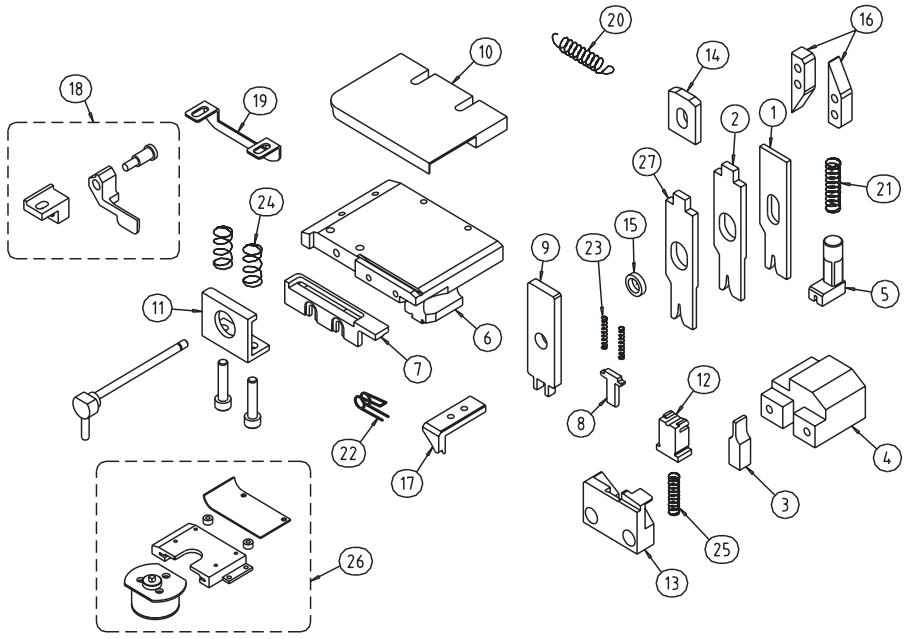

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4589XW		WIRE CRIMPER ワイヤークリンパー
2	7116-4589XID		INSULATION CRIMPER インシュレーションクリンパー
3	7116-4589XAD		ANVIL アンビル
4	7116-4589XJE		ANVIL HOLDER アンビルホルダー
5	7116-4589XYY		SUPPORTING STOPPER サポーティングストッパー
6	7116-4589XYB		BASE ベース
7	7116-4589XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB
8	48A47016	101 ②	WIRE HOLDER 電線押さえ
9	48A47017	103 ②	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー
10	7116-4589XYG①		TERMINAL GUIDE PLATE A ターミナルガイドプレートA
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ
12	48A19049	018 ②	SHEARBLADE シャープレード
13	48A47025	006 ②	OUTER SHEARBLADE アウターシャープレード
14	48A19007	016①	INSULATION ADJUSTING PIECE インシュレーション調整コマ
15	48A19019	020	BUSH ブッシュ
16	48A47014	005①	FEEDING CAM 送りカム

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
17	48A47013	001	FEEDING CLAW 送り爪
18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しスプリング
21	48A47032	001	SUPPORTING STOPPERSPRING サポーティングストッパースプリング
22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
24	48A19074		TERMINAL HOLDERSPRING ターミナル押さえスプリング
25	48A19050		SHEARBLADE SPRING シャープレードスプリング
26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
	7116-4589XKP		BRACKET ブラケット
27			~~STABILIZER CRIMPER スタビライザークリンパー~~
〈OPTION オプション〉			
13	48A47025	101	OUTER SHEARBLADE アウターシャープレード
14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
②	5/14/2024	48A47016-002→48A47016-101 48A47017-001→48A47017-103 48A19049-001→48A19049-018 48A47025-002→48A47025-006	C24E054	S.KAWAMORI
①	12/4/2009	018→016 001→005	QX7	C,Abe
①	12/4/2009	A04→7116-4589XYG	QX7	C,Abe

APPRICATION POST 申請部署	
HIB	
DESIGNED DATE 設計日	
9/7/2007	
APPROVED 承認	DESIGNED 設計
T,Maki	T,Suzuki
9/7/2007	9/7/2007

REVISED

ISSUE
6/10/2024
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED 発行