PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1803E118

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72960088 * SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7296-0088-02	*	MXSR	4514204129	DAIMLER TRUCK - NCP

Applicable Terminals for this Tool:

7296-0088-02	7296-0088-06		

Anvil			Wire Crimper			Insulation Crimper		
7296-0088XA		(A)	7296-0088XW		(A)	7296-0088XI		(A)
CW (c)	1.80	CW (i) 2.29	CW	1.78		CW	2.29	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.2 mm 0.15 - 0.35 mm	0.07 0.24		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.11		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.2 mm 0 - 0.2 mm	0.01		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 0.4 mm	0.33		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 5 °	1.2		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.3 mm	0.01		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec.

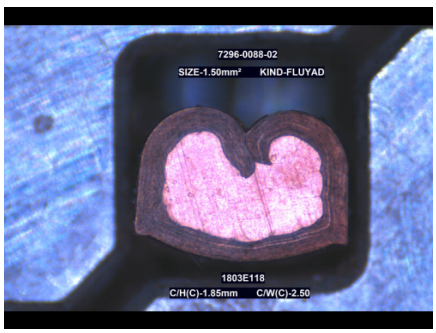
(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.1	1.11	2.35
	+/- 0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.3	1.31	2.15
	+/- 0.05		

REMARKS:

Applicable wire range 1.00mm²~1.50mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº44	PREPARED (Operator) nº5061
Date: 07/05/2025	Date: 06/05/2025	Date: 06/05/2025

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°
1803E118

LOWER WIRE KIND & SIZE

C/W(I): 2.30 mm
Wire kind: FLUYAD
Wire size: 1.00 mm^2
Nominal Cr. Height: 1.1 2.3 mm
+/- 0.05 0.1 mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.099	2.298
2	1.105	2.309
3	1.106	2.308
4	1.110	2.314
5	1.112	2.315
6	1.108	2.318
7	1.114	2.319
8	1.113	2.309
9	1.112	2.314
10	1.113	2.317
11	1.111	2.320
12	1.108	2.321
13	1.116	2.323
14	1.117	2.326
15	1.122	2.329
16	1.099	2.335
17	1.105	2.343
18	1.110	2.344
19	1.113	2.327
20	1.115	2.325
21	1.119	2.319
22	1.121	2.313
23	1.123	2.310
24	1.117	2.305
25	1.106	2.308
26	1.105	2.312
27	1.101	2.316
28	1.107	2.322
29	1.111	2.325
30	1.114	2.332
31	1.116	2.333
32	1.118	2.325
33	1.114	2.333
34	1.112	2.322
35	1.117	2.331
36	1.109	2.319
37	1.107	2.337
38	1.106	2.330
39	1.111	2.339
40	1.108	2.340
41	1.110	2.336
42	1.112	2.341
43	1.101	2.343
44	1.108	2.339
45	1.103	2.332
46	1.110	2.326
47	1.104	2.318
48	1.109	2.318
49	1.110	2.320
50	1.114	2.315
Average	1.11	2.32
Cmk	2.35	2.31

UPPER WIRE KIND & SIZE

C/W(I): 2.36 mm
Wire kind: FLUYAD
Wire size: 1.50 mm^2
Nominal Cr. Height: 1.3 2.5 mm
+/- 0.05 0.1 mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.302	2.527
2	1.315	2.534
3	1.303	2.530
4	1.300	2.502
5	1.303	2.534
6	1.309	2.537
7	1.291	2.528
8	1.310	2.543
9	1.312	2.517
10	1.305	2.527
11	1.306	2.511
12	1.299	2.536
13	1.303	2.523
14	1.316	2.516
15	1.312	2.501
16	1.301	2.525
17	1.304	2.509
18	1.308	2.519
19	1.300	2.541
20	1.322	2.513
21	1.315	2.510
22	1.302	2.532
23	1.303	2.543
24	1.316	2.506
25	1.295	2.516
26	1.305	2.510
27	1.310	2.527
28	1.309	2.533
29	1.320	2.545
30	1.311	2.524
31	1.310	2.506
32	1.313	2.513
33	1.311	2.522
34	1.302	2.534
35	1.309	2.526
36	1.313	2.523
37	1.314	2.511
38	1.316	2.503
39	1.303	2.545
40	1.307	2.532
41	1.306	2.504
42	1.308	2.508
43	1.312	2.521
44	1.311	2.536
45	1.304	2.521
46	1.309	2.519
47	1.310	2.525
48	1.312	2.540
49	1.314	2.528
50	1.323	2.523
Average	1.31	2.52
Cmk	2.15	2.11


Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-5767	TERMINAL No. 端子品番	7296-0088
共通品番	– – – – – – – –		

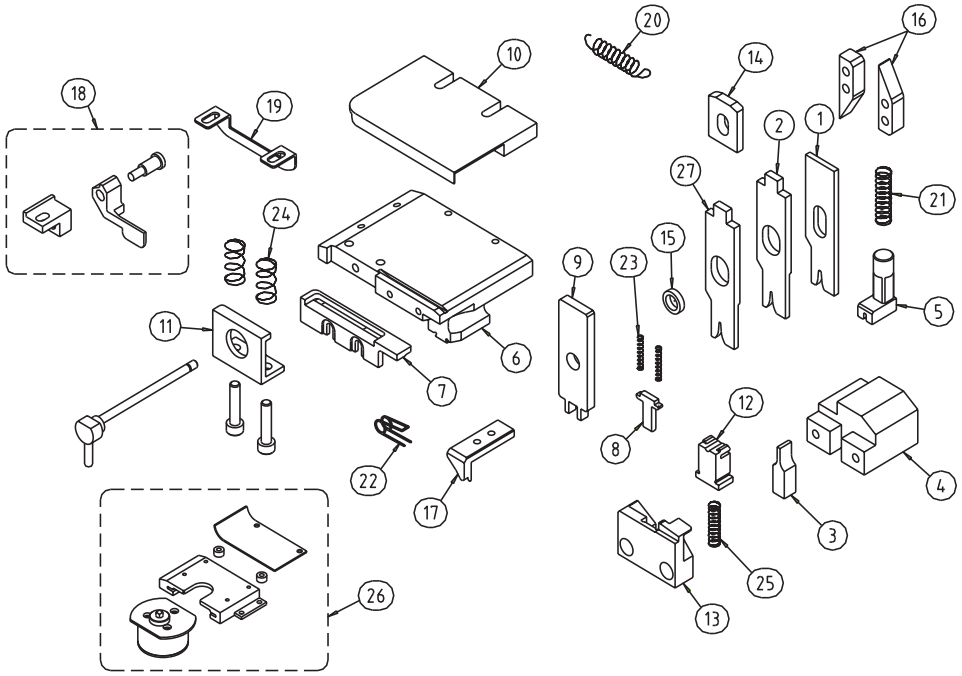Rev.1



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7296-0088XW		WIRE CRIMPER ワイヤークリンパー
2	7296-0088XI		INSULATION CRIMPER インシュレーションクリンパー
3	7296-0088XA		ANVIL アンビル
4	7296-0088XJE		ANVIL HOLDER アンビルホルダー
5	7296-0088XYY		SUPPORTING STOPPER サポーティングストッパー
6	7296-0088XYB		BASE ベース
7	7296-0088XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB
8	48A47016	-001	WIRE HOLDER 電線押さえ
9	48A47017	-003 ①	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー
10	48A47020	-A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ
12	48A47024	-001	SHEARBLADE シャープレード
13	48A47025	-002	OUTER SHEARBLADE アウターシャープレード
14	48A19007	-022	INSULATION ADJUSTING PIECE インシュレーション調整コマ
15	48A19019	-014	BUSH ブッシュ
16	48A47014	-003	FEEDING CAM 送りカム

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
17	48A47013	-001	FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しスプリング
21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
25	48A19050		SHEARBLADE SPRING シャープレードスプリング
26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
	7296-0088XKP		BRACKET ブラケット
27	~~7296-0088XQ~~		~~STABILIZER CRIMPER スタビライザークリンパー~~
〈OPTION オプション〉			
13	48A47025	-101	OUTER SHEARBLADE アウターシャープレード
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
①	7/2/2024	48A47017-002→48A47017-003	C24G042	S.KAWAMORI

APPRICATION POST 申請部署	
YWTS	
DESIGNED DATE 設計日	
10/2/2013	
APPROVED 承認	DESIGNED 設計
H,Hasegawa	C.Almeida
2/3/2017	10/2/2013

REVISED

ISSUE 8/5/2024 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED 発行