PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1903E083

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71161045 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-1045-02	**7157-3038-40**	**04 SIDE FEED**	**YSD-3500116811**	*





Anvil		
7116-1045DDXA		(N)
CW (c) 2,27	*CW (i)* 4,10	





Wire Crimper	
7116-1045DDXW	(1)
CW 2,25	

Insulation Crimper	
7116-1045DDXI	(2)
CW 4,10	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

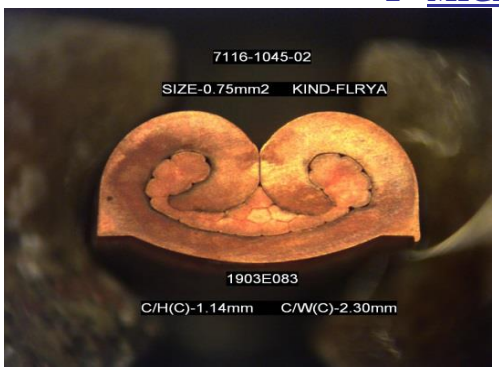
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

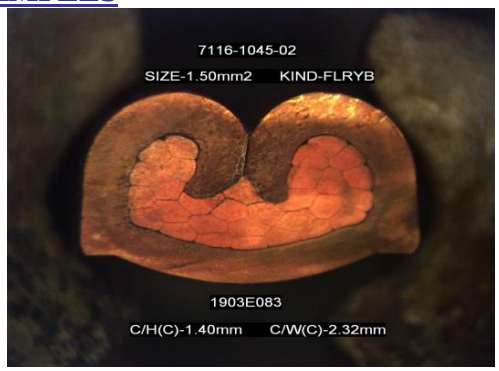
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,14	1,14	5,85
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1,4	1,40	4,83
	+/-0.05		

REMARKS:

Aplicable wire range-0.75~1.50mm^2
Size 0.75mm^2 C/W(I)-4.09mm
Size 1.50mm^2 C/W(I)-4.12mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2019-abr-05	Date: 2019-abr-05	Date: 2019-abr-05

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1903E083

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 0,75 mm²

Nominal Cr. Height:	1,14	3,5	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,141	3,489
2	1,145	3,492
3	1,142	3,493
4	1,138	3,494
5	1,139	3,496
6	1,142	3,500
7	1,140	3,497
8	1,137	3,496
9	1,135	3,499
10	1,135	3,495
11	1,136	3,489
12	1,142	3,494
13	1,140	3,496
14	1,136	3,500
15	1,138	3,496
16	1,141	3,492
17	1,144	3,500
18	1,142	3,501
19	1,141	3,496
20	1,145	3,492
21	1,141	3,496
22	1,143	3,498
23	1,143	3,496
24	1,140	3,493
25	1,139	3,496
26	1,141	3,500
27	1,144	3,502
28	1,146	3,504
29	1,143	3,498
30	1,139	3,494
31	1,140	3,497
32	1,142	3,499
33	1,145	3,504
34	1,142	3,499
35	1,140	3,495
36	1,137	3,501
37	1,138	3,503
38	1,138	3,498
39	1,144	3,500
40	1,142	3,502
41	1,140	3,503
42	1,141	3,500
43	1,143	3,497
44	1,146	3,501
45	1,143	3,498
46	1,142	3,495
47	1,143	3,497
48	1,144	3,500
49	1,143	3,498
50	1,139	3,495
Average	1,14	3,50
Cmk	5,85	9,06

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 1,5 mm²

Nominal Cr. Height:	1,4	3,9	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,400	3,901
2	1,398	3,904
3	1,394	3,900
4	1,397	3,903
5	1,402	3,905
6	1,407	3,899
7	1,403	3,894
8	1,399	3,896
9	1,396	3,902
10	1,400	3,907
11	1,403	3,902
12	1,405	3,897
13	1,404	3,894
14	1,400	3,896
15	1,404	3,902
16	1,408	3,904
17	1,402	3,906
18	1,399	3,903
19	1,404	3,898
20	1,405	3,900
21	1,404	3,907
22	1,400	3,911
23	1,402	3,910
24	1,404	3,904
25	1,407	3,902
26	1,403	3,906
27	1,400	3,909
28	1,398	3,914
29	1,400	3,909
30	1,405	3,904
31	1,405	3,900
32	1,409	3,905
33	1,405	3,907
34	1,402	3,909
35	1,400	3,906
36	1,401	3,901
37	1,406	3,905
38	1,408	3,908
39	1,406	3,911
40	1,400	3,912
41	1,401	3,909
42	1,405	3,904
43	1,405	3,901
44	1,400	3,904
45	1,405	3,908
46	1,406	3,910
47	1,404	3,907
48	1,400	3,903
49	1,401	3,906
50	1,404	3,907
Average	1,40	3,90
Cmk	4,83	6,87

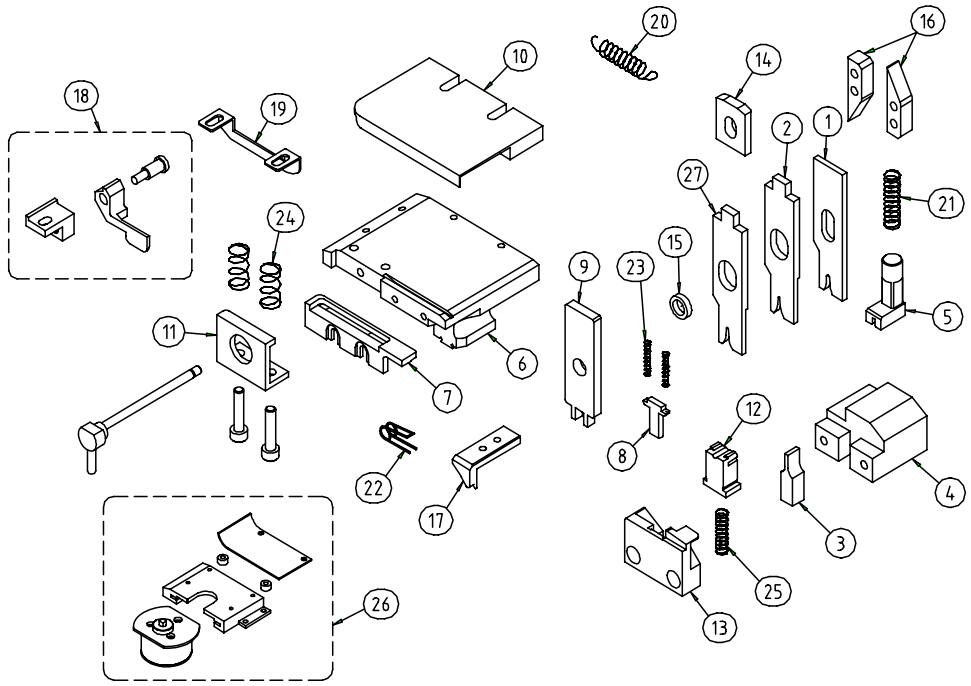
Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-0241	TERMINAL No. 端子品番	7116-1045DD

Common PN 共通品番	1/2517/54	–	–	–
	–	–		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-1045XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-1045XID		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-1045XAD		ANVIL アンビル	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7116-1045XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-1045XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-1045XYB		BASE ベース	22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-1045XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレードスプリング
10	48A47020	A05	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ		7116-1045XKP		BRACKET ブラケット
12	48A19049	001	SHEARBLADE シャープレード	27			~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	001	OUTER SHEARBLADE アウターシャープレード	〈OPTION オプション〉			
14	48A19007	013①	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	101	OUTER SHEARBLADE アウターシャープレード
15	48A19019	024	BUSH ブッシュ	14	48A47042	-003	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	005 ②	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計
					APPRICATION POST 申請部署	
					HIB	
					DESIGNED DATE 設計日	
					2007/7/18	
②	2010/9/20	001→005	101-073	Y.YAGI		
①	2008/9/25	010→013	QX7	C,Abe	K,Hiraguchi	T,Suzuki
					2007/7/18	2007/7/18

ISSUED
'12.06.14
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED 発行