PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1903E084

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71169962 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-9962-02	**7158-3213-90**	**04 SIDE FEED**	**YSD 3500116806**	*






Anvil			
7116-9962DDXA			(N)
CW (c)	2,02	*CW (i)* 4,00	




Wire Crimper		
7116-9962DDXW		(N)
CW	2,00	

Insulation Crimper		
7116-9962DDXI		(N)
CW	4,00	

1 - VISUAL CHECK ITEMS

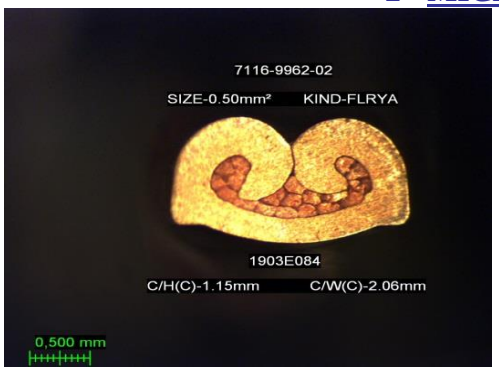
O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,15	1,15	4,65
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1,3	1,30	4,78
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm²
Wire 0.50mm² C/W(I)-3.99mm
Wire 1.00mm² C/W(I)-4.03mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2019-abr-08	Date: 2019-abr-05	Date: 2019-abr-05

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1903E084

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,5 mm²

Nominal Cr. Height:	1,15	3,5	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,152	3,502
2	1,149	3,501
3	1,153	3,502
4	1,151	3,503
5	1,151	3,501
6	1,148	3,499
7	1,150	3,498
8	1,149	3,501
9	1,147	3,501
10	1,150	3,500
11	1,147	3,500
12	1,151	3,499
13	1,153	3,503
14	1,149	3,500
15	1,147	3,503
16	1,145	3,498
17	1,149	3,500
18	1,147	3,499
19	1,145	3,507
20	1,151	3,507
21	1,148	3,508
22	1,151	3,510
23	1,150	3,504
24	1,150	3,499
25	1,151	3,502
26	1,153	3,509
27	1,147	3,509
28	1,152	3,508
29	1,149	3,502
30	1,155	3,503
31	1,152	3,511
32	1,155	3,502
33	1,151	3,501
34	1,151	3,498
35	1,155	3,498
36	1,156	3,495
37	1,160	3,498
38	1,145	3,493
39	1,152	3,496
40	1,158	3,495
41	1,156	3,495
42	1,148	3,501
43	1,150	3,499
44	1,146	3,493
45	1,154	3,497
46	1,154	3,499
47	1,154	3,494
48	1,152	3,500
49	1,159	3,499
50	1,149	3,498
Average	1,15	3,50
Cmk	4,65	7,63

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 1 mm²

Nominal Cr. Height:	1,3	3,9	mm
+/-	0,05	0,1	mm

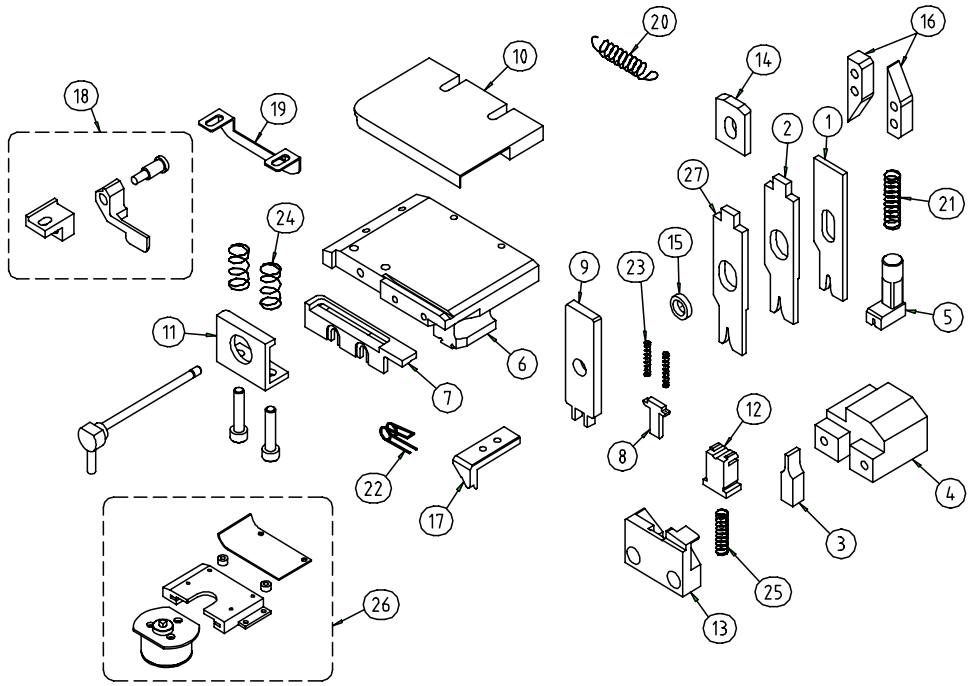
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,303	3,904
2	1,301	3,906
3	1,302	3,902
4	1,299	3,905
5	1,301	3,904
6	1,302	3,902
7	1,303	3,903
8	1,302	3,902
9	1,300	3,906
10	1,303	3,906
11	1,303	3,905
12	1,302	3,904
13	1,303	3,906
14	1,301	3,903
15	1,303	3,907
16	1,301	3,916
17	1,301	3,922
18	1,299	3,907
19	1,303	3,905
20	1,292	3,907
21	1,296	3,903
22	1,297	3,907
23	1,291	3,904
24	1,296	3,903
25	1,296	3,908
26	1,305	3,911
27	1,296	3,906
28	1,294	3,907
29	1,295	3,906
30	1,303	3,909
31	1,302	3,903
32	1,303	3,909
33	1,299	3,904
34	1,302	3,910
35	1,302	3,904
36	1,302	3,907
37	1,302	3,909
38	1,300	3,905
39	1,301	3,906
40	1,300	3,910
41	1,297	3,904
42	1,301	3,905
43	1,297	3,911
44	1,299	3,904
45	1,297	3,904
46	1,296	3,905
47	1,298	3,916
48	1,292	3,915
49	1,298	3,914
50	1,293	3,901
Average	1,30	3,91
Cmk	4,78	7,43

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1699	TERMINAL No. 端子品番	7116-9962DD
Common PN 共通品番	-	-	-
	-	-	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-9962XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-9962XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-9962XAD		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7116-9962XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-9962XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-9962XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-9962XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A05	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-9962XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	002	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	<OPTION ｵﾌﾟｼｮﾝ>			
14	48A19007	010 ①②	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	032	BUSH ﾌﾞｯｼｭ	14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	005②	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	
					HIB	
					DESIGNED DATE 設計日	
					2007/5/22	
②	2009/4/7	016→010 001→005	QX7	C,Abe	APPROVED 承認	DESIGNED 設計
①	2007/6/21	017→016	QX7	T,Suzuki	K,Hiraguchi	T,Suzuki
					2007/5/22	2007/5/22

ISSUED '11.10.20 YAZAKI PARTS CO.LTD. HIB MACHINE PRODUCT DEP.

ISSUED 発行