PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1903E087

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72961294 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7296-1294-02	**7158-3038-70**	**04 SIDE FEED**	**YSD-3500116806**	*







Anvil			
7296-1294XAD			(N)
CW (c)	1,64	*CW (i)*	3,20






Wire Crimper		
7296-1294XW		(N)
CW	1,62	

Insulation Crimper		
7296-1294XID		(N)
CW	3,20	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

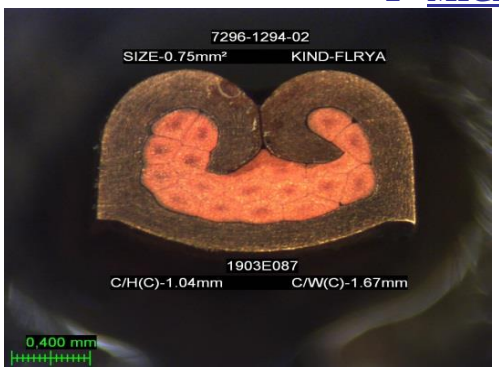
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

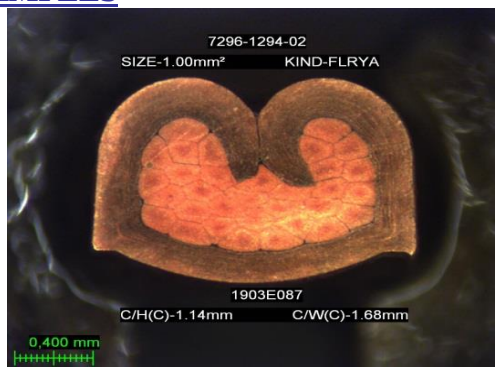
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,04	1,04	5,28
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1,14	1,15	3,43
	+/-0.05		

REMARKS:

Aplicable Wire Range 0.75mm²~1.00mm²
Wire 0.75mm² C/W(I)-3.20mm
Wire 1.00mm² C/W(I)-3.24mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 678
Date: 2019-abr-05	Date: 2019-abr-05	Date: 2019-abr-04

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1903E087

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,75 mm²

Nominal Cr. Height:	1,04	3	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,040	3,017
2	1,044	3,006
3	1,040	3,012
4	1,043	3,017
5	1,045	3,007
6	1,041	3,002
7	1,042	3,012
8	1,048	3,014
9	1,045	3,016
10	1,039	3,007
11	1,039	3,003
12	1,045	3,001
13	1,042	3,005
14	1,040	3,015
15	1,046	3,018
16	1,048	3,013
17	1,042	3,008
18	1,043	3,003
19	1,045	3,018
20	1,041	3,023
21	1,040	3,011
22	1,038	3,007
23	1,040	3,001
24	1,046	3,000
25	1,038	3,014
26	1,036	3,000
27	1,046	2,997
28	1,043	2,995
29	1,041	3,016
30	1,045	3,015
31	1,042	3,006
32	1,042	3,000
33	1,047	3,009
34	1,043	3,011
35	1,038	3,015
36	1,043	3,004
37	1,049	3,004
38	1,046	3,019
39	1,043	3,013
40	1,041	3,007
41	1,040	3,017
42	1,045	3,014
43	1,044	2,999
44	1,041	3,002
45	1,038	3,013
46	1,043	3,016
47	1,046	3,001
48	1,042	2,997
49	1,046	3,004
50	1,042	2,999
Average	1,04	3,01
Cmk	5,28	4,31

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 1 mm²

Nominal Cr. Height:	1,14	3,15	mm
+/-	0,05	0,1	mm

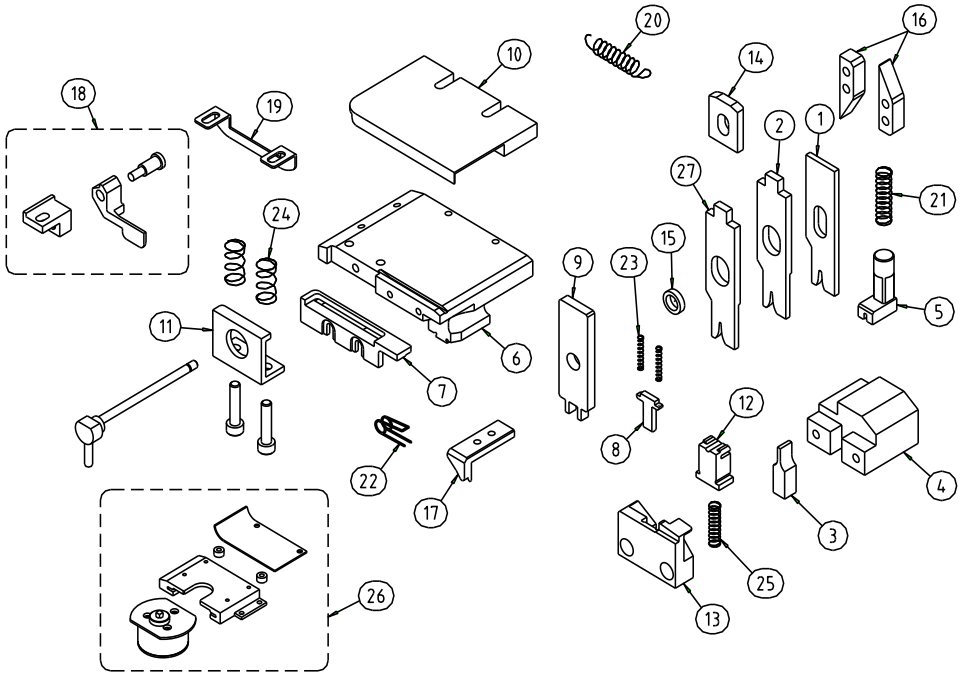
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,141	3,164
2	1,144	3,154
3	1,142	3,164
4	1,142	3,164
5	1,148	3,160
6	1,148	3,155
7	1,150	3,151
8	1,143	3,154
9	1,147	3,166
10	1,146	3,163
11	1,144	3,155
12	1,154	3,151
13	1,146	3,148
14	1,155	3,152
15	1,146	3,155
16	1,156	3,154
17	1,152	3,150
18	1,147	3,155
19	1,145	3,159
20	1,149	3,156
21	1,153	3,151
22	1,151	3,147
23	1,147	3,151
24	1,145	3,160
25	1,151	3,166
26	1,154	3,151
27	1,145	3,154
28	1,156	3,164
29	1,154	3,162
30	1,148	3,156
31	1,146	3,149
32	1,152	3,154
33	1,155	3,162
34	1,152	3,158
35	1,148	3,154
36	1,145	3,151
37	1,154	3,164
38	1,146	3,166
39	1,145	3,168
40	1,146	3,153
41	1,152	3,151
42	1,145	3,151
43	1,143	3,157
44	1,147	3,162
45	1,150	3,158
46	1,149	3,150
47	1,147	3,147
48	1,144	3,155
49	1,150	3,167
50	1,144	3,161
Average	1,15	3,16
Cmk	3,43	5,29

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-7117	TERMINAL No. 端子品番	7296-1294 ① DD
共通品番	– – – – – – – –		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7296-1294XW ①		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	-001	FEEDING CLAW 送り爪
2	7296-1294XID ①		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7296-1294XAD ①		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	-001	TERMINAL SCRAPER 端子掻き落とし
4	7296-1294XJE ①		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7296-1294XYY ①		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7296-1294XYB ①		BASE ﾍﾞｰｽ	22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7296-1294XYH ①		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	-002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	-003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	-A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7296-1294XKP ①		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	-001	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ	27	~~7296-1294XQ ①~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	-003	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	-020	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
15	48A19019	-032	BUSH ﾌﾞｯｼｭ	14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	-001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					PTC		
					DESIGNED DATE 設計日		
					27-05-2017		
					APPROVED 承認	DESIGNED 設計	
①	09-10-2017	Change No.7216-5554-9 → 7296-1294	PTC	C.F.Almeida	H.Hasegawa	C.F.Almeida	
					27-05-2017	27-05-2017	