PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1903E090






TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71169178 SEQUENCE Nº 9



Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-9178-06	*	**MYS2R**	**YSD-3500173688**	*

Anvil			Wire Crimper			Insulation Crimper		
7116-9178ZZXA		(N)	7116-9178ZZXW		(N)	7116-9178ZZXI		(N)
CW (c)	3.32	*CW (i)* 4.06	*CW*	3.30		*CW*	4.06	

1 - VISUAL CHECK ITEMS

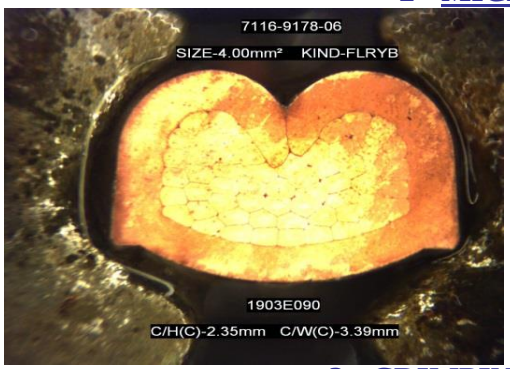
O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	2.35	2.37	2.93
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range-4.00mm²~4.00mm².
Wire 4.00mm² C/W(I)-4.30mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2020-jul-06	Date: 2020-jul-03	Date: 2020-jul-02

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1903E090

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 4 mm²

Nominal Cr. Height:	2.35	4.05	mm
+/-	0.05	0.05	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2.370	4.057
2	2.368	4.052
3	2.370	4.051
4	2.370	4.057
5	2.370	4.047
6	2.365	4.058
7	2.368	4.048
8	2.372	4.058
9	2.367	4.064
10	2.369	4.068
11	2.362	4.056
12	2.369	4.066
13	2.370	4.050
14	2.361	4.058
15	2.369	4.059
16	2.365	4.063
17	2.361	4.051
18	2.370	4.062
19	2.364	4.054
20	2.365	4.061
21	2.369	4.047
22	2.361	4.051
23	2.365	4.049
24	2.368	4.060
25	2.360	4.058
26	2.365	4.046
27	2.360	4.061
28	2.367	4.054
29	2.360	4.061
30	2.366	4.050
31	2.359	4.053
32	2.367	4.063
33	2.360	4.052
34	2.365	4.063
35	2.369	4.046
36	2.363	4.057
37	2.368	4.041
38	2.369	4.054
39	2.364	4.056
40	2.368	4.058
41	2.365	4.062
42	2.371	4.046
43	2.363	4.060
44	2.360	4.045
45	2.373	4.059
46	2.368	4.049
47	2.370	4.056
48	2.372	4.048
49	2.365	4.056
50	2.360	4.049
Average	2.37	4.06
Cmk	2.93	2.40

UPPER WIRE KIND & SIZE

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm

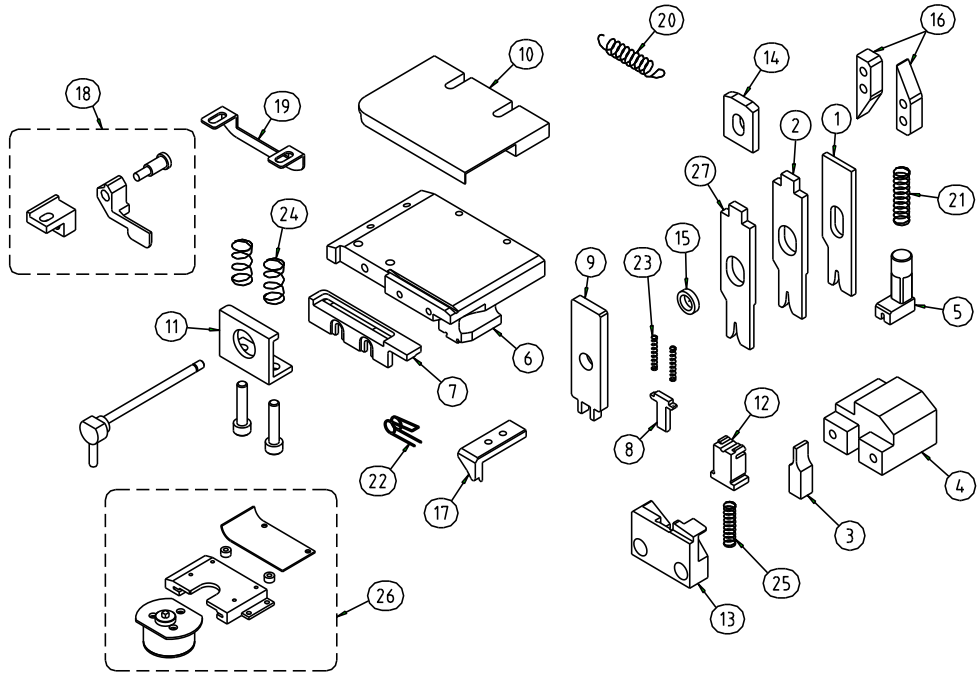
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2.0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	ZZ	TERMINAL No. 端子品番	7116-9178
共通品番	– – – – – – – –		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-9178ZZXW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-9178ZZXI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-9178ZZXA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7116-9178XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-9178XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-9178XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-9178XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A05	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-9178XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	002	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	~~7116-9178XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	002	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	030	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	018	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	005①	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	
					YWTL	
					DESIGNED DATE 設計日	
					16-09-2016	
					APPROVED 承認	DESIGNED 設計
①	06-01-2017	001->005		C.Almeida	S.Junior	C.F.Almeida
					16-09-2016	16-09-2016

ISSUED 発行