PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1903E095

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164493 * SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-4493-02	*	MXSR	4514400057	DAIMLER TRUCK - NCP

Applicable Terminals for this Tool:

7116-4493-02

Anvil			Wire Crimper			Insulation Crimper		
7116-4493XA		(N)	7116-4493XW		(2)	7116-4493XI		(2)
CW (c)	1.92	CW (i) 2.40	CW	1.90		CW	2.40	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.15 mm 0.15 - 0.45 mm	0.37		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.09		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 5 ° 0 - 5 °	0.1		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 1 mm	0.51		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	1		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 3 °	0.15		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable

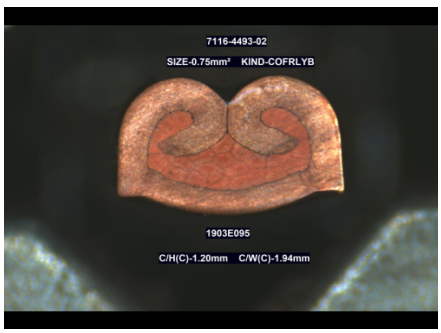
(*) - Specified on Crimping Spec.

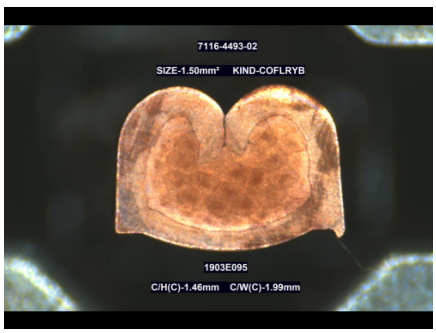
(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.2	1.20	2.37
	+/- 0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.45	1.46	2.27
	+/- 0.05		

REMARKS:

Applicable wire range 0.75mm²~1.50mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº5061
Date: 23/06/2026	Date: 23/06/2026	Date: 23/06/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°
1903E095

LOWER WIRE KIND & SIZE

C/W(I): 2.42 mm
Wire kind: COFLRYB
Wire size: 0.75 mm²

Nominal Cr. Height:	1.2	2.2	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.205	2.201
2	1.200	2.207
3	1.215	2.192
4	1.219	2.203
5	1.196	2.208
6	1.203	2.196
7	1.208	2.208
8	1.202	2.213
9	1.196	2.205
10	1.194	2.199
11	1.202	2.203
12	1.207	2.201
13	1.212	2.205
14	1.196	2.202
15	1.208	2.197
16	1.195	2.204
17	1.198	2.207
18	1.195	2.201
19	1.206	2.193
20	1.200	2.199
21	1.208	2.205
22	1.212	2.208
23	1.201	2.198
24	1.208	2.205
25	1.195	2.196
26	1.191	2.207
27	1.202	2.211
28	1.195	2.206
29	1.203	2.210
30	1.209	2.200
31	1.194	2.208
32	1.205	2.213
33	1.195	2.206
34	1.206	2.213
35	1.194	2.201
36	1.206	2.211
37	1.199	2.201
38	1.194	2.198
39	1.209	2.211
40	1.202	2.200
41	1.213	2.197
42	1.193	2.203
43	1.205	2.201
44	1.199	2.208
45	1.210	2.210
46	1.195	2.201
47	1.195	2.197
48	1.206	2.203
49	1.191	2.208
50	1.206	2.210
Average	1.20	2.20
Cmk	2.37	6.07

UPPER WIRE KIND & SIZE

C/W(I): 2.52 mm
Wire kind: COFLRYB
Wire size: 1.50 mm²

Nominal Cr. Height:	1.45	2.6	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.459	2.610
2	1.452	2.601
3	1.457	2.608
4	1.452	2.610
5	1.460	2.613
6	1.461	2.608
7	1.446	2.617
8	1.453	2.600
9	1.458	2.597
10	1.451	2.600
11	1.461	2.609
12	1.464	2.611
13	1.446	2.601
14	1.457	2.594
15	1.460	2.601
16	1.463	2.608
17	1.466	2.613
18	1.468	2.618
19	1.448	2.605
20	1.462	2.602
21	1.464	2.599
22	1.453	2.610
23	1.446	2.607
24	1.461	2.614
25	1.466	2.606
26	1.453	2.600
27	1.444	2.611
28	1.466	2.613
29	1.448	2.600
30	1.469	2.596
31	1.448	2.605
32	1.451	2.610
33	1.447	2.605
34	1.455	2.600
35	1.452	2.600
36	1.450	2.607
37	1.457	2.605
38	1.461	2.611
39	1.463	2.603
40	1.449	2.597
41	1.458	2.608
42	1.453	2.613
43	1.450	2.604
44	1.456	2.595
45	1.460	2.607
46	1.449	2.601
47	1.454	2.611
48	1.457	2.608
49	1.450	2.615
50	1.458	2.603
Average	1.46	2.61
Cmk	2.27	5.33


Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-0028	TERMINAL No. 端子品番	7116-4493

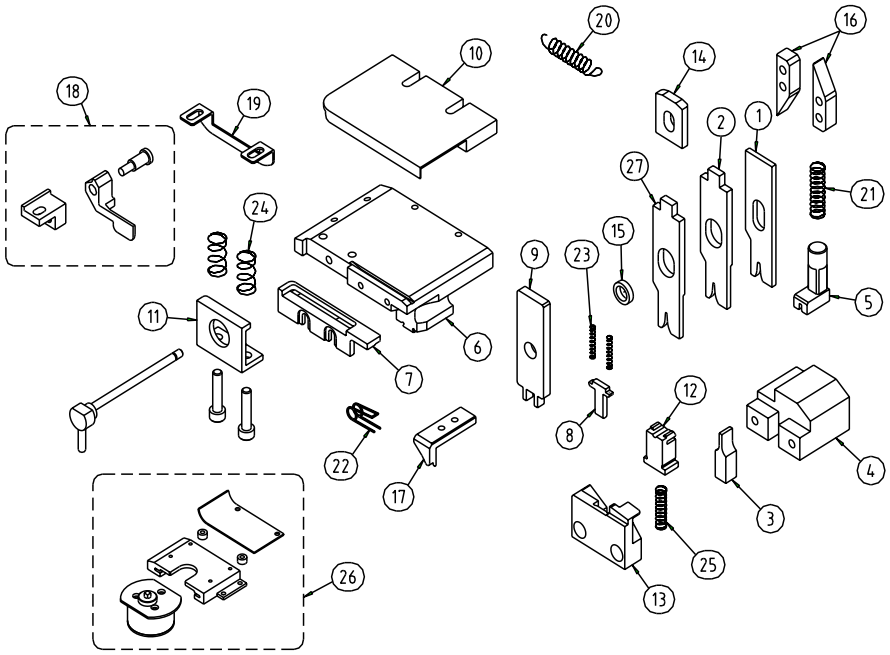Rev.1



No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
1	7116-4493XW		WIRE CRIMPER ワイヤークリンパー
2	7116-4493XI		INSULATION CRIMPER インシュレーションクリンパー
3	7116-4493XA		ANVIL アンビル
4	7116-4493XJE		ANVIL HOLDER アンビルホルダー
5	7116-4493XYY		SUPPORTING STOPPER サポーティングストッパー
6	7116-4493XYB		BASE ベース
7	7116-4493XYH		TERMINAL GUIDEPLATE B ターミナルガイドプレートB
8	48A47016	001	WIRE HOLDER 電線押さえ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー
10	48A47020	A04 ③	TERMINAL GUIDEPLATE A ターミナルガイドプレートA
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ
12	48A47024	001	SHEARBLADE シャーブレード
13	48A47025	001	OUTER SHEARBLADE アウターシャーブレード
14	48A19007	024 ①	INSULATION ADJUSTING PIECE インシュレーション調整コマ
15	48A19019	030 ②	BUSH ブッシュ

No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
16	48A47014	003	FEEDING CAM 送りカム
17	48A47013		FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
19	48A19047	002 ①	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しスプリング
21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
23	48A19023	001	WIRE HOLDER SPRING 電線押さえスプリング
24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
	7116-4493XKP		BRACKET ブラケット
〈オプション OPTION〉			
13	48A47025	-101	OUTER SHEARBLADE アウターシャーブレード
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED
③	4/15/2016	A03→A04	16D-012	Y.YAGI
②	10/18/2011	032 ⇒ 030	11J-038	M.Segawa
①	10/3/2007	023→024, 001→002	QX7	T.Suzuki

APPRICATION POST 申請部	
PTC	
DESIGNED DATE 設計日	
3/20/2007	
APPROVED 承認	DESIGNED 設計
K.Hiraguchi	T.Suzuki
3/20/2007	3/20/2007

ISSUE
5/13/2024
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED