APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1907E058







TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164451 SEQUENCE Nº 9





Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4451-02	*	**04 SIDE FEED**	**YSD-3500132149**	*

Anvil			Wire Crimper			Insulation Crimper		
7116-4451ZZXAC		(N)	7116-4451ZZXW		(N)	7116-4451XI		(N)
CW (c)	1.65	*CW (i)* 2.60	*CW*	1.63		*CW*	2.60	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

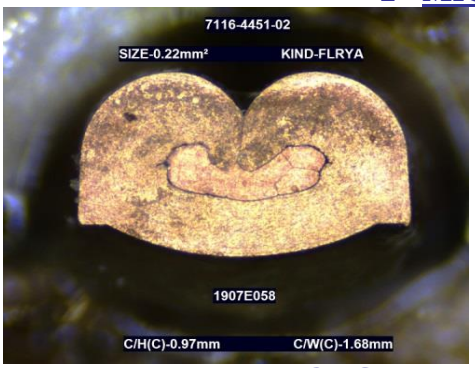
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

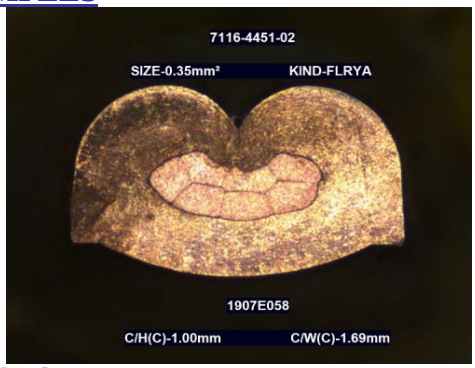
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.97	0.97	3.45
	+/-0.03		



	NOMINAL	AVERAGE	Cmk
mm	0.99	0.99	3.08
	+/-0.03		

REMARKS:

Aplicable wire range 0.22mm² ~ 0.35mm²
Wire 0.22mm² C/W(I)-2.47mm
Wire 0.35mm² C/W(I)-2.49mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18597
		
Date: 2019-set-08	Date: 2019-set-06	Date: 2019-set-05

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1907E058

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0.22 mm²

Nominal Cr. Height:	0.97	1.8	mm
+/-	0.03	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.970	1.803
2	0.969	1.801
3	0.972	1.801
4	0.969	1.796
5	0.971	1.795
6	0.974	1.801
7	0.974	1.799
8	0.973	1.798
9	0.969	1.795
10	0.969	1.803
11	0.966	1.798
12	0.969	1.803
13	0.964	1.803
14	0.970	1.803
15	0.968	1.801
16	0.963	1.804
17	0.968	1.799
18	0.967	1.812
19	0.969	1.788
20	0.969	1.807
21	0.969	1.809
22	0.969	1.800
23	0.970	1.799
24	0.970	1.799
25	0.970	1.799
26	0.968	1.802
27	0.968	1.802
28	0.967	1.804
29	0.969	1.801
30	0.970	1.800
31	0.970	1.801
32	0.969	1.797
33	0.967	1.804
34	0.971	1.796
35	0.971	1.802
36	0.973	1.796
37	0.970	1.796
38	0.968	1.800
39	0.971	1.798
40	0.968	1.802
41	0.968	1.801
42	0.970	1.804
43	0.968	1.804
44	0.968	1.802
45	0.970	1.806
46	0.970	1.801
47	0.961	1.795
48	0.959	1.783
49	0.968	1.785
50	0.972	1.785
Average	0.97	1.80
Cmk	3.45	5.99

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0.35 mm²

Nominal Cr. Height:	0.99	1.9	mm
+/-	0.03	0.1	mm

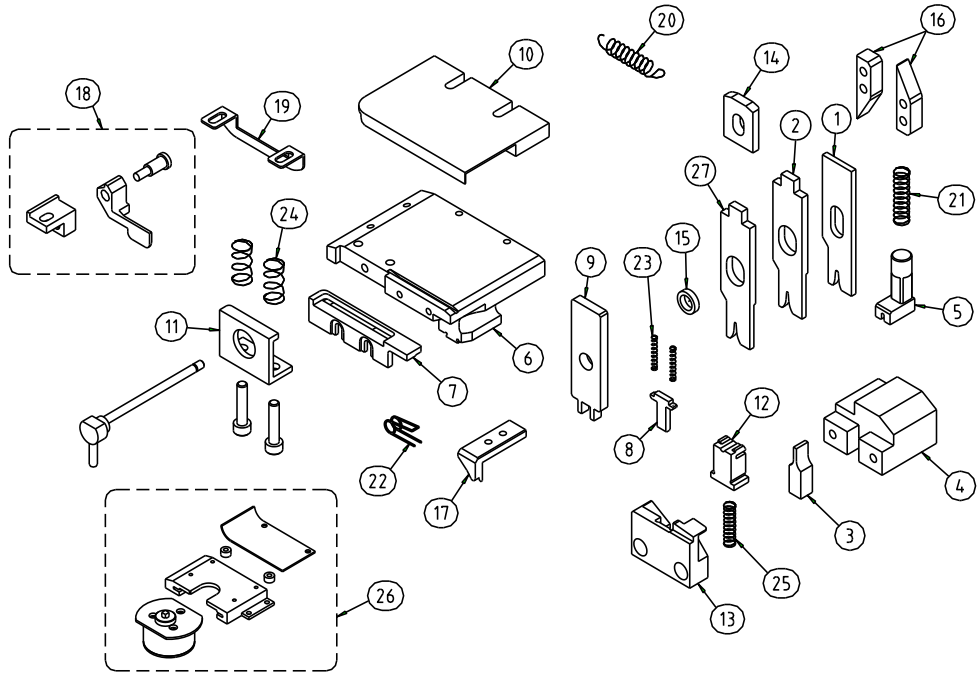
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.992	1.906
2	0.994	1.904
3	0.995	1.904
4	0.993	1.898
5	0.991	1.910
6	0.992	1.898
7	0.994	1.911
8	0.994	1.901
9	0.991	1.908
10	0.995	1.906
11	0.991	1.905
12	0.992	1.903
13	0.991	1.900
14	0.990	1.901
15	0.989	1.901
16	0.993	1.908
17	0.990	1.904
18	0.994	1.901
19	0.990	1.897
20	0.997	1.895
21	0.988	1.902
22	0.981	1.902
23	0.997	1.901
24	0.993	1.897
25	0.993	1.903
26	0.993	1.902
27	0.992	1.904
28	0.991	1.901
29	0.991	1.901
30	0.991	1.903
31	0.990	1.898
32	0.990	1.905
33	0.988	1.905
34	0.988	1.904
35	0.991	1.900
36	0.990	1.898
37	0.991	1.898
38	0.990	1.898
39	0.990	1.909
40	0.991	1.905
41	0.990	1.913
42	0.989	1.913
43	0.989	1.908
44	0.995	1.908
45	0.990	1.908
46	0.986	1.908
47	0.998	1.906
48	0.999	1.907
49	0.994	1.906
50	0.993	1.905
Average	0.99	1.90
Cmk	3.08	7.52

Acceptance criteria: Cmk>= 2.0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	ZZ	TERMINAL No. 端子品番	7116-4451 C
共通品番	– – – – – – – –		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4451ZZXW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-4451XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-4451ZZXAC		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	003	TERMINAL SCRAPER 端子掻き落とし
4	7116-4451XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-4451XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-4451XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-4451XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	001	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	004	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-4451XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	~~7116-4451XQ~~		~~STABILIZER CRIMPER~~ ~~ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	027	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	015	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					YWTL		
					DESIGNED DATE 設計日		
					17-02-2016		
					APPROVED 承認	DESIGNED 設計	
					S.Junior	C.F.Almeida	
					17-02-2016	17-02-2016	