APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)






Applicator Serial Nº
1907E062

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71167308 SEQUENCE Nº 9


Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-7308-02	*	**04 SIDE FEED**	**YSD-3500132149**	+

Anvil			Wire Crimper			Insulation Crimper		
7116-7308XA		(N)	7116-7308XW		(N)	7116-7308XI		(N)
CW (c)	1.42	*CW (i)* 2.03	*CW*	1.40		*CW*	2.03	

1 - VISUAL CHECK ITEMS

	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

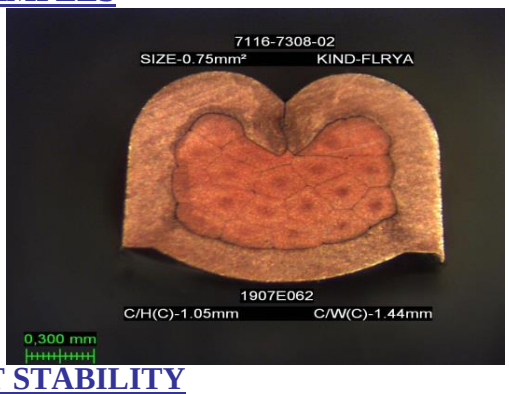
O - ok **X** - ng **NA** - not aplicable

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.93	0.93	2.25
	+/-0.03		

	NOMINAL	AVERAGE	Cmk
mm	1.05	1.06	2.13
	+/-0.03		

REMARKS:

Aplicable Wire Range 0.50mm²~0.75mm²
Wire 0.50mm² C/W(I)-1.98mm
Wire 0.75mm² C/W(I)-2.07mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 678
Date: 2019-ago-30	Date: 2019-ago-30	Date: 2019-ago-28

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1907E062

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0.5 mm²

Nominal Cr. Height:	0.93	1.7	mm
+/-	0.03	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.933	1.701
2	0.928	1.696
3	0.929	1.700
4	0.934	1.701
5	0.932	1.703
6	0.930	1.699
7	0.938	1.699
8	0.938	1.705
9	0.940	1.708
10	0.942	1.708
11	0.933	1.701
12	0.934	1.704
13	0.930	1.711
14	0.929	1.711
15	0.928	1.707
16	0.932	1.699
17	0.932	1.697
18	0.935	1.696
19	0.935	1.709
20	0.938	1.702
21	0.936	1.711
22	0.935	1.706
23	0.936	1.708
24	0.939	1.713
25	0.937	1.704
26	0.934	1.701
27	0.936	1.696
28	0.938	1.700
29	0.941	1.704
30	0.938	1.697
31	0.935	1.694
32	0.930	1.703
33	0.929	1.706
34	0.928	1.694
35	0.938	1.693
36	0.932	1.704
37	0.931	1.701
38	0.936	1.707
39	0.935	1.701
40	0.934	1.709
41	0.941	1.704
42	0.937	1.708
43	0.935	1.708
44	0.932	1.705
45	0.929	1.709
46	0.936	1.712
47	0.938	1.706
48	0.928	1.701
49	0.935	1.712
50	0.930	1.704
Average	0.93	1.70
Cmk	2.25	6.19

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0.75 mm²

Nominal Cr. Height:	1.05	2.05	mm
+/-	0.03	0.1	mm

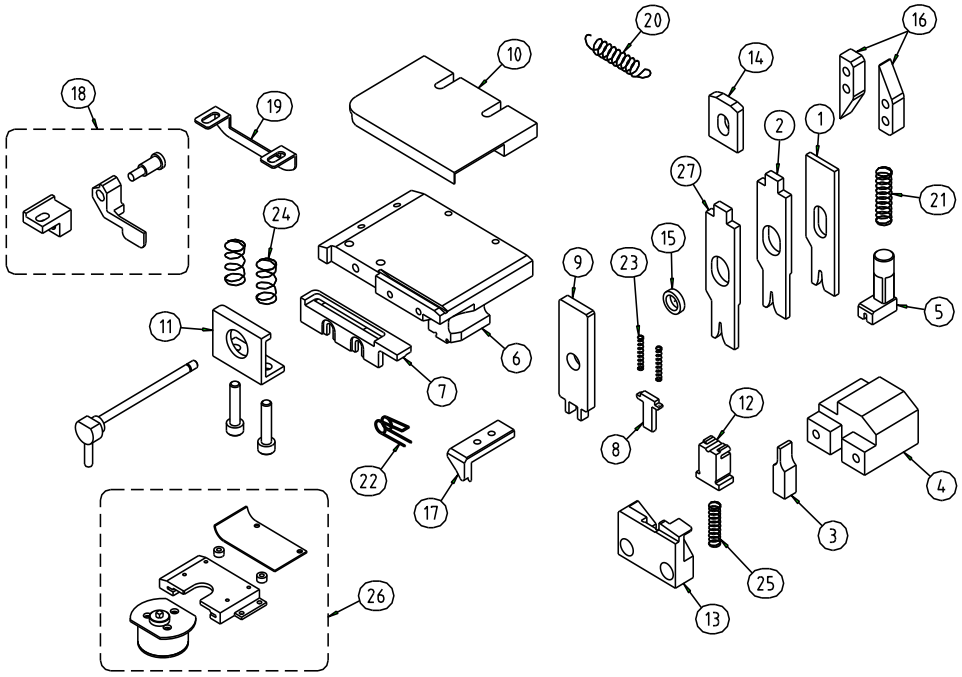
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.058	2.058
2	1.053	2.045
3	1.060	2.052
4	1.061	2.058
5	1.055	2.063
6	1.055	2.060
7	1.053	2.062
8	1.052	2.052
9	1.060	2.061
10	1.057	2.060
11	1.055	2.052
12	1.052	2.049
13	1.048	2.043
14	1.050	2.043
15	1.061	2.051
16	1.060	2.050
17	1.054	2.048
18	1.058	2.057
19	1.062	2.048
20	1.053	2.046
21	1.061	2.043
22	1.058	2.052
23	1.055	2.059
24	1.059	2.059
25	1.059	2.061
26	1.057	2.062
27	1.064	2.053
28	1.061	2.048
29	1.055	2.051
30	1.052	2.059
31	1.052	2.059
32	1.058	2.049
33	1.057	2.044
34	1.049	2.060
35	1.061	2.052
36	1.054	2.051
37	1.052	2.061
38	1.055	2.057
39	1.058	2.048
40	1.054	2.061
41	1.051	2.062
42	1.051	2.051
43	1.057	2.048
44	1.057	2.046
45	1.054	2.056
46	1.054	2.061
47	1.058	2.065
48	1.060	2.062
49	1.052	2.060
50	1.059	2.050
Average	1.06	2.05
Cmk	2.13	5.01

Acceptance criteria: Cmk>= 2.0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-5699	TERMINAL No. 端子品番	7116-7308
共通品番	– – – – – – – –		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-7308XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	-001	FEEDING CLAW 送り爪
2	7116-7308XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-7308XA		ANVIL アンビル	19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
4	7116-7308XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-7308XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-002 ①	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-7308XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-7308XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-003	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレートスプリング
10	48A47020	-A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7116-7308XKP		BRACKET ブラケット
12	48A47024	-001	SHEARBLADE シャープレート	27	~~7116-7308XQ~~		~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	-001	OUTER SHEARBLADE アウターシャープレート	〈OPTION オプション〉			
14	48A19007	-026	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャープレート
15	48A19019	-016	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-003	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計	ISSUED 発行
①	07-11-2017	001->002	PTC	C.Almeida	T,Maki	C.Almeida	23-04-2013

APPRICATION POST 申請部署: YWTS

DESIGNED DATE 設計日: 23-04-2013