APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1907E064






TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71167310 SEQUENCE Nº 9




Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-7310-02	*	**04 SIDE FEED**	**YSD-3500132149**	*

Anvil			Wire Crimper			Insulation Crimper		
7116-7310XA		(N)	7116-7310XW		(N)	7116-7310XI		(N)
CW (c)	1.42	*CW (i)* 1.83	*CW*	1.40		*CW*	1.83	

1 - VISUAL CHECK ITEMS

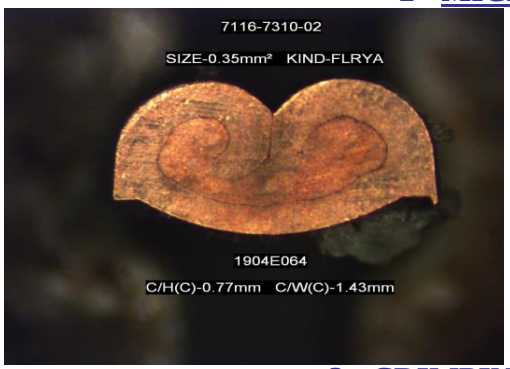
O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.76	0.76	2.06
	+/-0.03		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range-0.25mm²~0.35mm².
Section 0.25mm² not prepared due the miss wire samples.
Wire 0.35mm² C/W(I)-1.75mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2019-ago-30	Date: 2019-ago-28	Date: 2019-ago-28

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1907E064

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0.35 mm²

Nominal Cr. Height:	0.76	1.5	mm
+/-	0.03	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.766	1.509
2	0.763	1.500
3	0.758	1.499
4	0.769	1.510
5	0.764	1.510
6	0.764	1.502
7	0.766	1.509
8	0.770	1.511
9	0.769	1.514
10	0.765	1.512
11	0.767	1.504
12	0.767	1.514
13	0.762	1.517
14	0.758	1.519
15	0.755	1.516
16	0.758	1.522
17	0.763	1.531
18	0.765	1.520
19	0.767	1.513
20	0.762	1.510
21	0.762	1.503
22	0.767	1.499
23	0.770	1.510
24	0.766	1.502
25	0.762	1.507
26	0.762	1.506
27	0.763	1.500
28	0.768	1.498
29	0.769	1.501
30	0.771	1.507
31	0.765	1.502
32	0.763	1.507
33	0.761	1.505
34	0.759	1.499
35	0.758	1.507
36	0.757	1.498
37	0.760	1.507
38	0.761	1.500
39	0.761	1.508
40	0.760	1.501
41	0.759	1.500
42	0.757	1.500
43	0.761	1.499
44	0.757	1.506
45	0.757	1.499
46	0.755	1.503
47	0.755	1.498
48	0.759	1.505
49	0.755	1.498
50	0.759	1.496
Average	0.76	1.51
Cmk	2.06	4.21

UPPER WIRE KIND & SIZE

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm

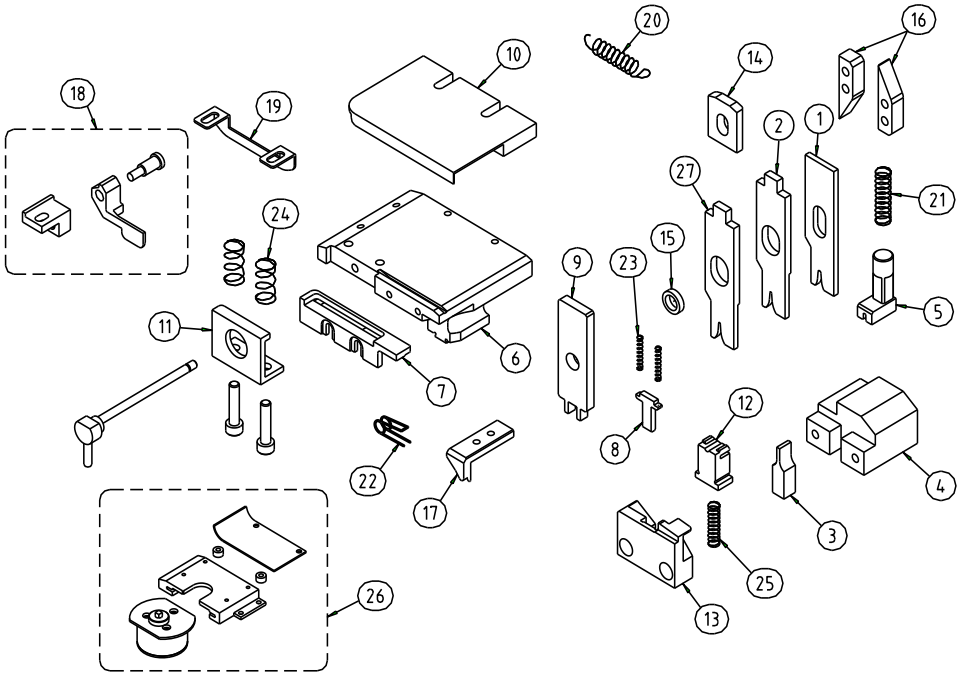
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2.0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-5700	TERMINAL No. 端子品番	7116-7310
共通品番	– – – – – – – –		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-7310XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	-001	FEEDING CLAW 送り爪
2	7116-7310XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-7310XA		ANVIL アンビル	19	48A19047	-003	TERMINAL SCRAPER 端子掻き落とし
4	7116-7310XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-7310XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-7310XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-7310XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレートスプリング
10	48A47020	A04 ①	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7116-7310XKP		BRACKET ブラケット
12	48A47024	-001	SHEARBLADE シャープレート	27	~~7116-7310XQ~~		~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	-001	OUTER SHEARBLADE アウターシャープレート	〈OPTION オプション〉			
14	48A19007	-027	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャープレート
15	48A19019	-019	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-003	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計	ISSUED 発行
①	2013-10-15	A03→A04	13J-023	Y.YAGI	S. SUZUKI	C.Almeida	
					26-04-2013	26-04-2013	

APPRICATION POST 申請部署: YWTS

DESIGNED DATE 設計日: 26-04-2013