PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE



# APPLICATOR VALIDATION REPORT

**(Spec. YEL-RP-02-0004)**

| Applicator Serial Nº |
|---|
| 1907E076 |

***TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72163295 SEQUENCE Nº*** 9

| Terminal Nº | Rubber Seal | Applicator Type | Purchasing Order Nº | Project / Model |
|---|---|---|---|---|
| **7216-3295-06** | * | **04 SIDE FEED** | **YSD-3500132149** | * |






| Anvil | | |
|---|---|---|
| 7216-3295ZZXA | | (1) |
| *CW (c)* 1.29 | *CW (i)* 1.78 | |




| Wire Crimper | |
|---|---|
| 7216-3295ZZXW | (A) |
| *CW* 1.27 | |

| Insulation Crimper | |
|---|---|
| 7216-3295ZZXI | (A) |
| *CW* 1.78 | |

## 1 - VISUAL CHECK ITEMS

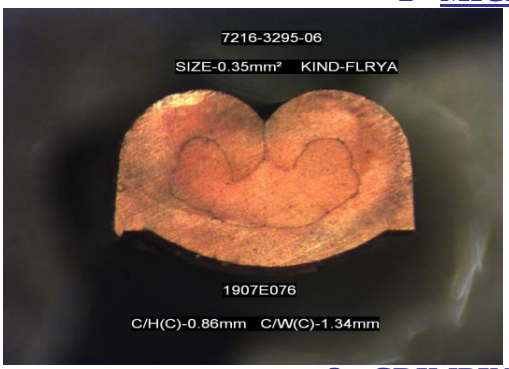
**O** - ok **X** - ng **NA** - not aplicable

| | | |
|---|---|---|
|  | The two sides of the insulation grips are in the correct position. | O |
|  | Not found any Bell Mouth in the insulation area. | O |
|  | The lance height and shape are not deformed. | NA |
|  | Not found any burr in the cutting carrier. | O |
|  | Not found any crack in the terminal. | O |
|  | The wire barrel is free from major burrs. | O |

| | | |
|---|---|---|
|  | The Bell Mouth is within the spec.**(*)** | O |
|  | The dimension of the cutting carrier is within the spec.**(*)** | O |
|  | Bend up and Bend down are within the criteria**(*)** | O |
|  | The exposed conductor is within the spec.(*) | O |
|  | The terminal is not bent sideway, look-king from the top**(*)** | O |
|  | The body of the terminal is not twisted**(*)** | O |

| **LOWER** WIRE KIND & SIZE | **UPPER** WIRE KIND & SIZE |
|---|---|

## 2 - MICRO CUT SAMPLES




## 3 - CRIMPING HEIGHT STABILITY

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | 0.87 | 0.87 | 2.10 |
| | **+/-0.03** | | |

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | NA | | |
| | **+/-NA** | | |

**REMARKS:**

Aplicable wire range-0.35mm²~0.35mm²
Wire 0.35mm² C/W(I)-1.77mm

**EVALUATION DECISION**

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

| APPROVED (Section Chief) 3485 | CHECKED (Operator) 44 | PREPARED (Operator) nº 5061 |
|---|---|---|
| Date: 2019-ago-30 | Date: 2019-ago-30 | Date: 2019-ago-29 |

YAZAKI
PORTO TECHNICAL CENTRE

# APPLICATOR VALIDATION REPORT

| Applicator Serial Nº |
|---|
| 1907E076 |

## LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0.35 mm²

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | 0.87 | 1.65 | mm |
| +/- | 0.03 | 0.1 | mm |

| Sample number | Crimp height WIRE (mm) | Crimp height INSULATION (mm) |
|---|---|---|
| 1 | 0.878 | 1.666 |
| 2 | 0.872 | 1.670 |
| 3 | 0.869 | 1.667 |
| 4 | 0.875 | 1.658 |
| 5 | 0.870 | 1.656 |
| 6 | 0.862 | 1.658 |
| 7 | 0.875 | 1.662 |
| 8 | 0.864 | 1.662 |
| 9 | 0.864 | 1.652 |
| 10 | 0.869 | 1.658 |
| 11 | 0.863 | 1.663 |
| 12 | 0.871 | 1.667 |
| 13 | 0.873 | 1.658 |
| 14 | 0.864 | 1.657 |
| 15 | 0.873 | 1.655 |
| 16 | 0.872 | 1.664 |
| 17 | 0.864 | 1.657 |
| 18 | 0.875 | 1.665 |
| 19 | 0.864 | 1.663 |
| 20 | 0.867 | 1.654 |
| 21 | 0.877 | 1.656 |
| 22 | 0.865 | 1.658 |
| 23 | 0.871 | 1.654 |
| 24 | 0.875 | 1.651 |
| 25 | 0.870 | 1.658 |
| 26 | 0.872 | 1.653 |
| 27 | 0.877 | 1.657 |
| 28 | 0.869 | 1.666 |
| 29 | 0.878 | 1.669 |
| 30 | 0.867 | 1.671 |
| 31 | 0.869 | 1.659 |
| 32 | 0.871 | 1.668 |
| 33 | 0.864 | 1.653 |
| 34 | 0.872 | 1.661 |
| 35 | 0.870 | 1.656 |
| 36 | 0.869 | 1.651 |
| 37 | 0.875 | 1.666 |
| 38 | 0.866 | 1.654 |
| 39 | 0.876 | 1.652 |
| 40 | 0.867 | 1.649 |
| 41 | 0.860 | 1.660 |
| 42 | 0.870 | 1.652 |
| 43 | 0.876 | 1.646 |
| 44 | 0.866 | 1.657 |
| 45 | 0.862 | 1.651 |
| 46 | 0.870 | 1.646 |
| 47 | 0.873 | 1.649 |
| 48 | 0.872 | 1.651 |
| 49 | 0.868 | 1.657 |
| 50 | 0.877 | 1.650 |
| Average | 0.87 | 1.66 |
| Cmk | 2.10 | 4.80 |

## UPPER WIRE KIND & SIZE

Wire kind: NA + NA

Wire size: NA + NA mm²

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | NA | NA | mm |
| +/- | NA | NA | mm |

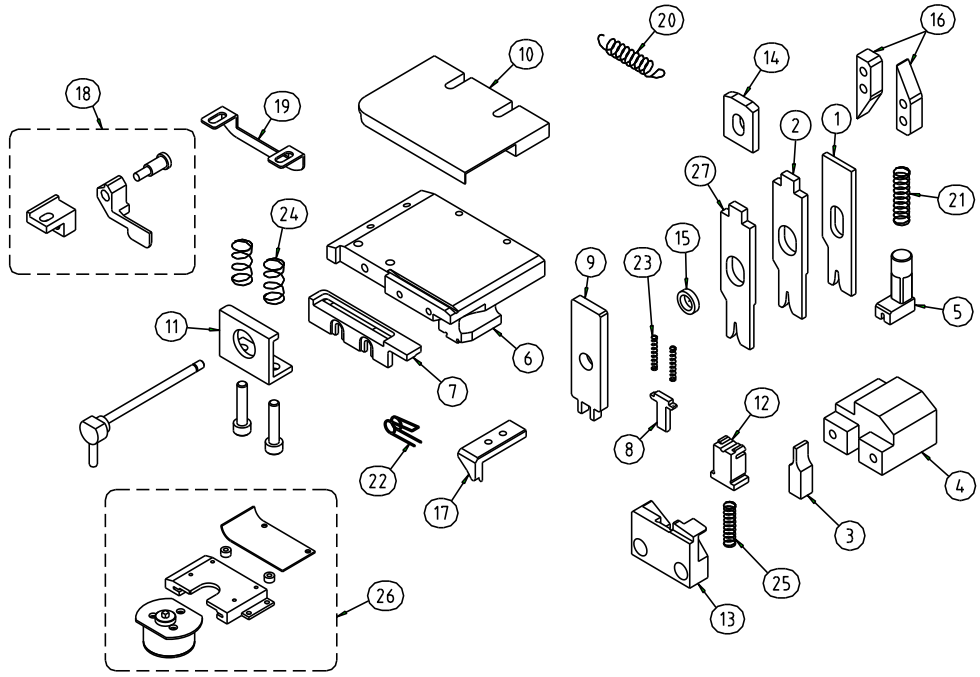
| Sample number | Crimp height WIRE (mm) | Crimp height INSULATION (mm) |
|---|---|---|
| 1 | | |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |
| 7 | | |
| 8 | | |
| 9 | | |
| 10 | | |
| 11 | | |
| 12 | | |
| 13 | | |
| 14 | | |
| 15 | | |
| 16 | | |
| 17 | | |
| 18 | | |
| 19 | | |
| 20 | | |
| 21 | | |
| 22 | | |
| 23 | | |
| 24 | | |
| 25 | | |
| 26 | | |
| 27 | | |
| 28 | | |
| 29 | | |
| 30 | | |
| 31 | | |
| 32 | | |
| 33 | | |
| 34 | | |
| 35 | | |
| 36 | | |
| 37 | | |
| 38 | | |
| 39 | | |
| 40 | | |
| 41 | | |
| 42 | | |
| 43 | | |
| 44 | | |
| 45 | | |
| 46 | | |
| 47 | | |
| 48 | | |
| 49 | | |
| 50 | | |
| Average | | |
| Cmk | | |

**Acceptance criteria: Cmk>= 2.0**

**END**

# 04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

| PRODUCT No. 製品番号 | C0100-???? | TERMINAL No. 端子品番 | 7216-3295 |
|---|---|---|---|
| 共通品番 | – – – – – – | | |




| No, | PARTS No, 部品番号 | DRW No, 図番 | PARTS NAME 部品名称 | No, | PARTS No, 部品番号 | DRW No, 図番 | PARTS NAME 部品名称 |
|---|---|---|---|---|---|---|---|
| 1 | 7216-3295ZZXW | | WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ | 17 | 48A47013 | 001 | FEEDING CLAW 送り爪 |
| 2 | 7216-3295ZZXI | | INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ | 18 | 48A19100 | 005 | WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ |
| 3 | 7216-3295ZZXA | | ANVIL ｱﾝﾋﾞﾙ | 19 | 48A19047 | 002 ① | TERMINAL SCRAPER 端子掻き落とし |
| 4 | 7216-3295XJE | | ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ | 20 | 48A47031 | | RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ |
| 5 | 7216-3295XYY | | SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ | 21 | 48A47032 | 002 ③ | SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ |
| 6 | 7216-3295XYB | | BASE ﾍﾞｰｽ | 22 | 48A19017 | 003 | FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ |
| 7 | 7216-3295XYH | | TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB | 23 | 48A19023 | 002 | WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ |
| 8 | 48A47016 | 001 | WIRE HOLDER 電線押さえ | 24 | 48A19074 | | TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ |
| 9 | 48A47017 | 002 | CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ | 25 | 48A19050 | | SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ |
| 10 | 48A47020 | A03 | TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA | 26 | 48A19999 | | TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ |
| 11 | 48A47022 | 002 | TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ | | 7216-3295XKP | | BRACKET ﾌﾞﾗｹｯﾄ |
| 12 | 48A47024 | 002 ③ | SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ | 27 | ~~7216-3295XQ~~ | | ~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~ |
| 13 | 48A47025 | 001 | OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ | 〈OPTION ｵﾌﾟｼｮﾝ〉 | | | |
| 14 | 48A19007 | 025 | INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ | 13 | 48A47025 | 101 | OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ |
| 15 | 48A19019 | 016 ② | BUSH ﾌﾞｯｼｭ | 14 | 48A47042 | 001 | INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ) |
| 16 | 48A47014 | 003 | FEEDING CAM 送りｶﾑ | | | | |

| MARK 記号 | DATE 日付 | REVISION RECORD 改訂記録 | No. 番号 | CHECKED 点検 | APPRICATION POST 申請部署 | | ISSUED 発行 |
|---|---|---|---|---|---|---|---|
| | | | | | YWTL | | |
| | | | | | DESIGNED DATE 設計日 | | |
| ③ | 13-06-2018 | 48A47024001 → 48A47024002<br>48A47032001 → 48A47032002 | PTC | F.Loureiro | 14-06-2016 | | |
| ② | 11-06-2018 | 48A19019019 → 48A19019016 | PTC | F.Loureiro | APPROVED 承認 | DESIGNED 設計 | |
| ① | 28-03-2018 | 48A19047003 → 48A19047002 | PTC | F.Loureiro | S.Junior | C.F.Almeida | |
| | | | | | 14-06-2016 | 14-06-2016 | |