PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1601E118

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71167488 * SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-7488-02	*	MXSR	4514417508	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7116-7488-02			

Anvil			Wire Crimper			Insulation Crimper		
7116-7488XA		(N)	7116-7488XW		(N)	7116-7488XI		(N)
CW (c)	1.30	*CW (i)* 1.50	*CW*	1.30		*CW*	1.50	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.3 mm 0.3 - 0.4 mm	0.09 0.37		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.2 mm	0.07		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.2 mm 0 - 0.2 mm	0.1		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 0.5 mm	0.23		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	0.2		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.4 mm	0.11		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable

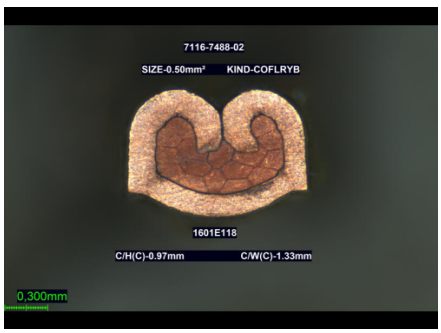
(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.97	0.97	6.50
	+/- **0.04**		

	NOMINAL	AVERAGE	Cmk
mm			
	+/-		

REMARKS:

Applicable wire range 0.50mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº1947	CHECKED (Operator) nº19147	PREPARED (Operator) nº18388
	RAFAEL VALENTE	HELDER ROCHA
Date: 12/08/2026	Date: 11/08/2026	Date: 11/08/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

1601E118

LOWER WIRE KIND & SIZE

C/W(l): 1.58 mm

Wire kind: COFLRYB

Wire size: 0.50 mm²

Nominal Cr. Height:	0.97	1.96	mm
+/-	0.04	0.08	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	0.973	1.963
2	0.972	1.966
3	0.974	1.965
4	0.973	1.967
5	0.972	1.959
6	0.969	1.961
7	0.974	1.965
8	0.973	1.963
9	0.971	1.967
10	0.973	1.963
11	0.973	1.965
12	0.974	1.958
13	0.969	1.958
14	0.970	1.967
15	0.972	1.963
16	0.973	1.959
17	0.974	1.965
18	0.968	1.966
19	0.973	1.956
20	0.972	1.967
21	0.969	1.958
22	0.970	1.963
23	0.974	1.961
24	0.973	1.962
25	0.972	1.959
26	0.973	1.967
27	0.968	1.962
28	0.973	1.956
29	0.974	1.965
30	0.970	1.967
31	0.973	1.961
32	0.972	1.958
33	0.969	1.956
34	0.968	1.967
35	0.972	1.966
36	0.973	1.959
37	0.970	1.965
38	0.973	1.956
39	0.970	1.962
40	0.973	1.965
41	0.974	1.967
42	0.969	1.961
43	0.970	1.956
44	0.974	1.959
45	0.968	1.967
46	0.972	1.965
47	0.974	1.962
48	0.973	1.961
49	0.969	1.959
50	0.970	1.958
Average	0.97	1.96
Cmk	6.50	7.10

UPPER WIRE KIND & SIZE

C/W(l): mm

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-6685	TERMINAL No. 端子品番	7116-7488
共通品番	– – – – – – – –		

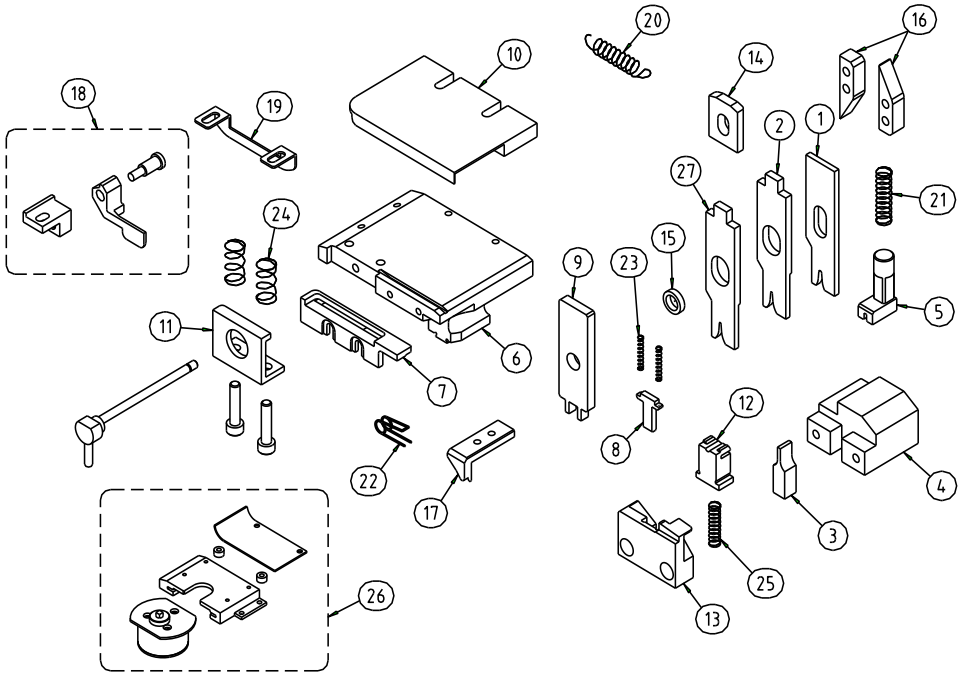

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-7488XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	-001	FEEDING CLAW 送り爪
2	7116-7488XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-7488XA		ANVIL アンビル	19	48A19047	-003	TERMINAL SCRAPER 端子掻き落とし
4	7116-7488XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-7488XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-7488XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-7488XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-003 ①	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
10	48A47020	-A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-002	TERMINAL HOLDER ターミナル押さえ		7116-7488XKP		BRACKET ブラケット
12	48A47024	-001	SHEARBLADE シャーブレード	27	~~7116-7488XQ~~		~~STABILIZER CRIMPER~~ ~~スタビライザークリンパー~~
13	48A47025	-001	OUTER SHEARBLADE アウターシャーブレード	〈OPTION オプション〉			
14	48A19007	-024	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャーブレード
15	48A19019	-014	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-001	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計	ISSUED 発行
①	13-10-2016	48A47017002 → 48A47017003	PTC	C.F.Almeida	H.Hasegawa	C.F.Almeida	23-09-2016

APPRICATION POST 申請部署: YWTL

DESIGNED DATE 設計日: 23-09-2016