PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1601E139

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164493 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-4493-02	*	MYSR	4514400057	DAIMLER TRUCK - NCP

Applicable Terminals for this Tool:

7116-4493-02					

Anvil			Wire Crimper			Insulation Crimper		
7116-4493XA		(N)	7116-4493XW		(2)	7116-4493XI		(2)
CW (c)	1.92	CW (i) 2.40	CW	1.90		CW	2.40	

1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.15 mm 0.15 - 0.45 mm	0.35		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.1		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 5 ° 0 - 5 °	0.18		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 1 mm	0.58		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	0.95		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 3 °	0.05		The body of the terminal is not twisted.	O


O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE | **UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

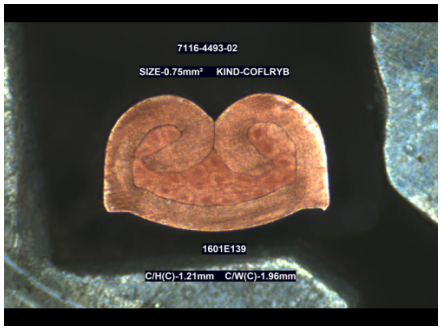

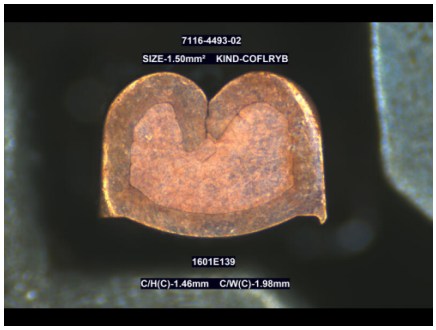

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.2	1.20	2.11
	+/- 0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.45	1.45	2.68
	+/- 0.05		

REMARKS:

Applicable wire range 0.75mm²~1.50mm².

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº5061
Date: 23/06/2026	Date: 23/06/2026	Date: 23/06/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°
1601E139

LOWER WIRE KIND & SIZE

C/W(I): 2.42 mm
Wire kind: COFLRYB
Wire size: 0.75 mm²
Nominal Cr. Height: 1.2 2.2 mm
+/- 0.05 0.1 mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.202	2.192
2	1.212	2.202
3	1.194	2.208
4	1.206	2.200
5	1.201	2.194
6	1.194	2.206
7	1.208	2.197
8	1.202	2.206
9	1.212	2.212
10	1.198	2.204
11	1.201	2.196
12	1.201	2.205
13	1.193	2.210
14	1.202	2.214
15	1.207	2.207
16	1.202	2.201
17	1.196	2.197
18	1.206	2.203
19	1.198	2.208
20	1.192	2.211
21	1.204	2.203
22	1.211	2.197
23	1.197	2.204
24	1.212	2.212
25	1.215	2.213
26	1.201	2.204
27	1.216	2.199
28	1.212	2.206
29	1.204	2.200
30	1.198	2.208
31	1.206	2.200
32	1.210	2.196
33	1.204	2.206
34	1.214	2.201
35	1.216	2.195
36	1.206	2.196
37	1.199	2.205
38	1.211	2.197
39	1.200	2.195
40	1.215	2.208
41	1.221	2.206
42	1.203	2.211
43	1.218	2.203
44	1.208	2.213
45	1.199	2.213
46	1.213	2.206
47	1.200	2.201
48	1.212	2.211
49	1.199	2.214
50	1.198	2.203
Average	1.20	2.20
Cmk	2.11	5.40

UPPER WIRE KIND & SIZE

C/W(I): 2.49 mm
Wire kind: COFLRYB
Wire size: 1.50 mm²
Nominal Cr. Height: 1.45 2.6 mm
+/- 0.05 0.1 mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.454	2.617
2	1.463	2.621
3	1.454	2.614
4	1.447	2.608
5	1.456	2.615
6	1.461	2.608
7	1.451	2.617
8	1.464	2.612
9	1.446	2.609
10	1.440	2.606
11	1.454	2.605
12	1.448	2.612
13	1.458	2.609
14	1.461	2.605
15	1.465	2.601
16	1.451	2.598
17	1.459	2.605
18	1.452	2.611
19	1.463	2.614
20	1.450	2.606
21	1.462	2.604
22	1.455	2.602
23	1.451	2.601
24	1.448	2.600
25	1.456	2.604
26	1.459	2.608
27	1.451	2.611
28	1.451	2.615
29	1.455	2.606
30	1.449	2.603
31	1.458	2.600
32	1.452	2.599
33	1.458	2.604
34	1.451	2.607
35	1.450	2.609
36	1.457	2.612
37	1.449	2.605
38	1.446	2.610
39	1.462	2.613
40	1.453	2.604
41	1.457	2.601
42	1.458	2.608
43	1.445	2.612
44	1.453	2.615
45	1.458	2.603
46	1.445	2.600
47	1.456	2.600
48	1.455	2.602
49	1.444	2.608
50	1.458	2.601
Average	1.45	2.61
Cmk	2.68	5.65


Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-0028	TERMINAL No. 端子品番	7116-4493

Rev.1

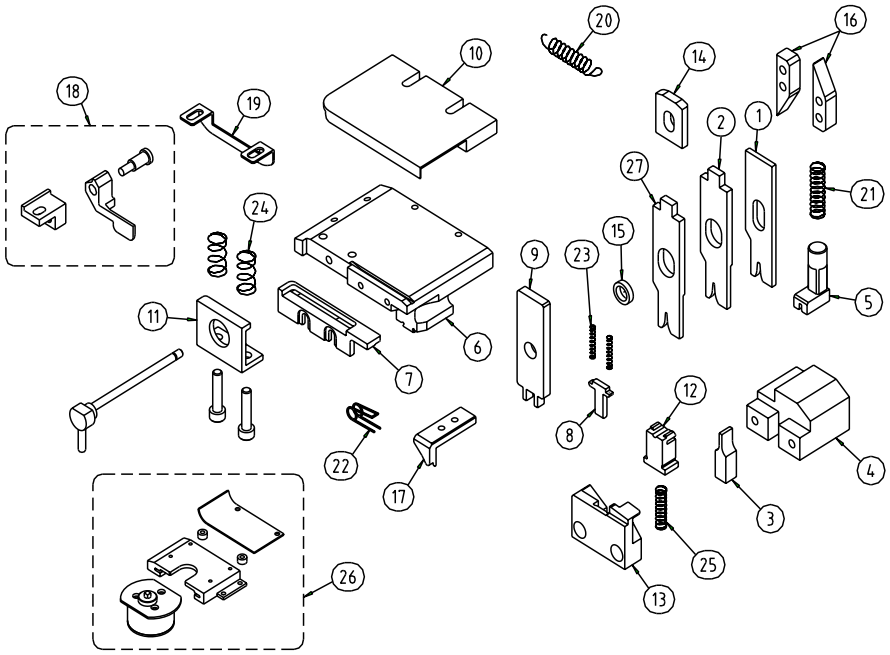

No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
1	7116-4493XW		WIRE CRIMPER ワイヤークリンパー
2	7116-4493XI		INSULATION CRIMPER インシュレーションクリンパー
3	7116-4493XA		ANVIL アンビル
4	7116-4493XJE		ANVIL HOLDER アンビルホルダー
5	7116-4493XYY		SUPPORTING STOPPER サポーティングストッパー
6	7116-4493XYB		BASE ベース
7	7116-4493XYH		TERMINAL GUIDEPLATE B ターミナルガイドプレートB
8	48A47016	001	WIRE HOLDER 電線押さえ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー
10	48A47020	A04 ③	TERMINAL GUIDEPLATE A ターミナルガイドプレートA
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ
12	48A47024	001	SHEARBLADE シャーブレード
13	48A47025	001	OUTER SHEARBLADE アウターシャーブレード
14	48A19007	024 ①	INSULATION ADJUSTING PIECE インシュレーション調整コマ
15	48A19019	030 ②	BUSH ブッシュ

No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
16	48A47014	003	FEEDING CAM 送りカム
17	48A47013		FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
19	48A19047	002 ①	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しスプリング
21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
23	48A19023	001	WIRE HOLDER SPRING 電線押さえスプリング
24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
	7116-4493XKP		BRACKET ブラケット
〈オプション OPTION〉			
13	48A47025	-101	OUTER SHEARBLADE アウターシャーブレード
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED
③	4/15/2016	A03→A04	16D-012	Y.YAGI
②	10/18/2011	032 ⇒ 030	11J-038	M.Segawa
①	10/3/2007	023→024, 001→002	QX7	T.Suzuki

APPRICATION POST 申請部	
PTC	
DESIGNED DATE 設計日	
3/20/2007	
APPROVED 承認	DESIGNED 設計
K.Hiraguchi	T.Suzuki
3/20/2007	3/20/2007

ISSUE
5/13/2024
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED