APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1601E142

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71165801 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-5801-06	**7158-3666**	**04 SIDE FEED**	**YSD-3500091458**	*







Anvil		
7116-5801XAD		(N)
CW (c) 2,81	*CW (i)* 6,60	





Wire Crimper		
7116-5801XW		(N)
CW 2,79		

Insulation Crimper		
7116-5801XID		(N)
CW 6,60		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

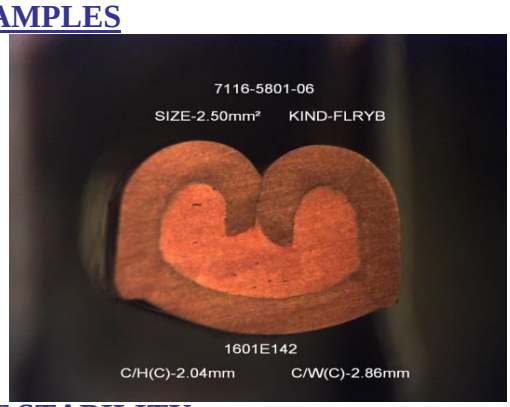
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,76	1,77	4,87
	+/-0,05		

	NOMINAL	AVERAGE	Cmk
mm	2,04	2,05	4,62
	+/-0,05		

REMARKS:

Aplicable wire range 1.50mm²~2.50mm²
Wire 1.50mm² C/W(I)-6.58mm
Wire 2.50mm² C/W(I)-6.60mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2018-set-27	Date: 2018-set-26	Date: 2018-set-26

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1601E142

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 1,5 mm²

Nominal Cr. Height:	1,76	6,3	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,757	6,303
2	1,760	6,304
3	1,759	6,303
4	1,760	6,304
5	1,760	6,305
6	1,764	6,301
7	1,762	6,305
8	1,766	6,306
9	1,760	6,305
10	1,764	6,298
11	1,761	6,298
12	1,763	6,302
13	1,766	6,299
14	1,762	6,298
15	1,767	6,301
16	1,766	6,301
17	1,766	6,300
18	1,764	6,298
19	1,763	6,300
20	1,764	6,298
21	1,764	6,298
22	1,763	6,301
23	1,766	6,298
24	1,766	6,304
25	1,766	6,297
26	1,769	6,298
27	1,770	6,296
28	1,769	6,298
29	1,769	6,296
30	1,766	6,300
31	1,764	6,293
32	1,768	6,293
33	1,767	6,295
34	1,767	6,297
35	1,769	6,298
36	1,767	6,294
37	1,768	6,291
38	1,768	6,290
39	1,768	6,304
40	1,767	6,300
41	1,766	6,293
42	1,767	6,304
43	1,769	6,300
44	1,768	6,297
45	1,766	6,297
46	1,768	6,295
47	1,767	6,298
48	1,766	6,298
49	1,767	6,296
50	1,768	6,299
Average	1,77	6,30
Cmk	4,87	8,67

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 2,5 mm²

Nominal Cr. Height:	2,04	6,4	mm
+/-	0,05	0,1	mm

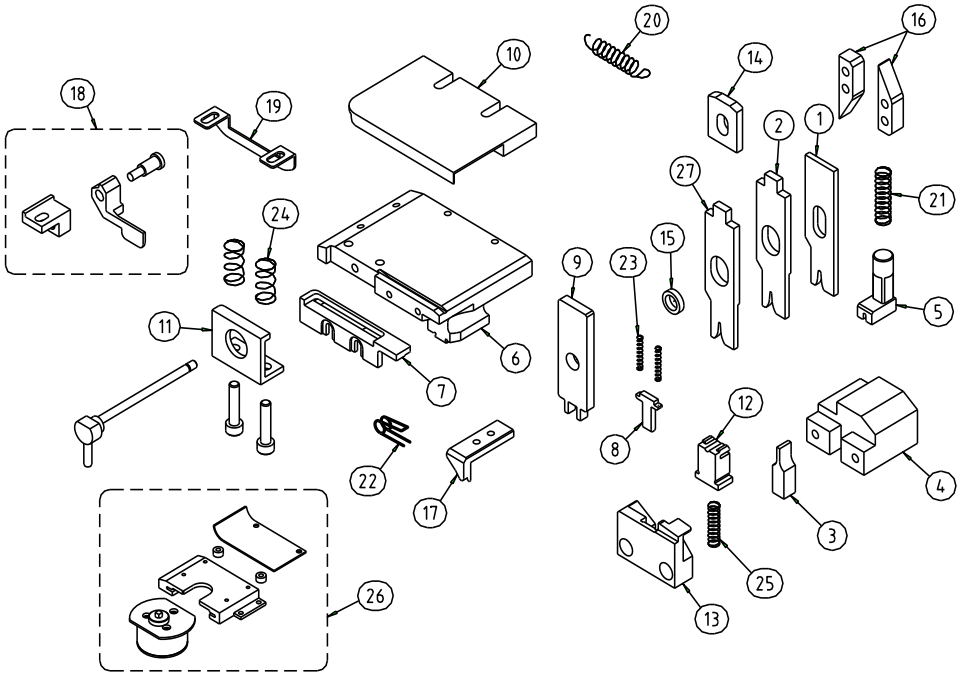
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,045	6,408
2	2,045	6,407
3	2,047	6,404
4	2,048	6,405
5	2,048	6,405
6	2,043	6,404
7	2,050	6,407
8	2,048	6,407
9	2,048	6,407
10	2,051	6,405
11	2,049	6,409
12	2,052	6,408
13	2,054	6,406
14	2,049	6,407
15	2,049	6,407
16	2,050	6,396
17	2,053	6,401
18	2,054	6,400
19	2,044	6,403
20	2,046	6,404
21	2,046	6,404
22	2,044	6,402
23	2,044	6,401
24	2,044	6,400
25	2,043	6,399
26	2,047	6,397
27	2,045	6,396
28	2,043	6,396
29	2,043	6,395
30	2,043	6,394
31	2,044	6,395
32	2,043	6,406
33	2,046	6,406
34	2,044	6,406
35	2,042	6,405
36	2,044	6,405
37	2,041	6,405
38	2,043	6,405
39	2,044	6,402
40	2,048	6,402
41	2,048	6,402
42	2,047	6,402
43	2,047	6,402
44	2,048	6,403
45	2,046	6,403
46	2,049	6,403
47	2,049	6,403
48	2,048	6,403
49	2,047	6,399
50	2,049	6,402
Average	2,05	6,40
Cmk	4,62	8,53

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-5822	TERMINAL No. 端子品番	7116-5801 DD
共通品番	– –	– –	– –



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-5801XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	7116-8156XYF		FEEDING CLAW 送り爪
2	7116-5801XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-5801XAD		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	-001	TERMINAL SCRAPER 端子掻き落とし
4	7116-5801XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-5801XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-5801XYB		BASE ﾍﾞｰｽ	22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-5801XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	-101	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	-103	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A19039	-A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-5801XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	-018	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	~~7116-5801XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	-008	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	-001	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	-102	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	-032	BUSH ﾌﾞｯｼｭ	14	48A47042	-003	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	-005	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署		
YIL		
DESIGNED DATE 設計日		
19-12-2013		
APPROVED 承認	DESIGNED 設計	ISSUED 発行
T,Maki	C.Almeida	
19-12-2013	19-12-2013	