PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1607E190

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72141840 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7214-1840-02	7158-3357-70	MXD2R	4514417508	DAIMLER TRUCK - BEV







Applicable Terminals for this Tool:

7214-1840-02	7214-1840-06		

Anvil			Wire Crimper			Insulation Crimper		
7214-1840ZZXAD		(N)	7214-1840ZZXW		(N)	7214-1840ZZXID		(N)
CW (c)	2.56	CW (i) 4.32	CW	2.54		CW	4.32	

1 - VISUAL / MEASURED CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.2 mm 0.2 - 0.6 mm	0.53		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.5 mm	0.12		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.3 mm 0 - 0.3 mm	0.15		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 1 mm	0.49		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 5 °	0.5		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.5 mm	0.01		The body of the terminal is not twisted.	O

(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.58	1.58	3.07
	+/- 0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.88	1.88	3.37
	+/- 0.05		

REMARKS:

Applicable wire range >1.00mm²~2.50mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº5061
Date: 28/07/2026	Date: 27/07/2026	Date: 27/07/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°
1607E190

LOWER WIRE KIND & SIZE

C/W(I): 4.31 mm
Wire kind: FLRYA
Wire size: 1.50 mm²
Nominal Cr. Height: 1.58 4.2 mm
+/- 0.05 0.1 mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.583	4.210
2	1.576	4.211
3	1.582	4.201
4	1.580	4.205
5	1.576	4.209
6	1.583	4.214
7	1.574	4.207
8	1.576	4.198
9	1.586	4.206
10	1.579	4.200
11	1.587	4.210
12	1.588	4.208
13	1.577	4.200
14	1.584	4.195
15	1.586	4.198
16	1.589	4.201
17	1.586	4.196
18	1.575	4.197
19	1.580	4.195
20	1.586	4.195
21	1.589	4.199
22	1.583	4.202
23	1.589	4.206
24	1.585	4.209
25	1.580	4.212
26	1.588	4.207
27	1.591	4.212
28	1.594	4.204
29	1.587	4.201
30	1.593	4.199
31	1.584	4.197
32	1.580	4.201
33	1.586	4.201
34	1.589	4.197
35	1.591	4.204
36	1.587	4.212
37	1.578	4.203
38	1.589	4.199
39	1.579	4.207
40	1.588	4.211
41	1.590	4.217
42	1.585	4.204
43	1.588	4.199
44	1.585	4.209
45	1.592	4.214
46	1.584	4.206
47	1.583	4.213
48	1.589	4.204
49	1.582	4.201
50	1.582	4.200
Average	1.58	4.20
Cmk	3.07	5.52

UPPER WIRE KIND & SIZE

C/W(I): 4.36 mm
Wire kind: FLRYA
Wire size: 2.50 mm²
Nominal Cr. Height: 1.88 4.35 mm
+/- 0.05 0.1 mm

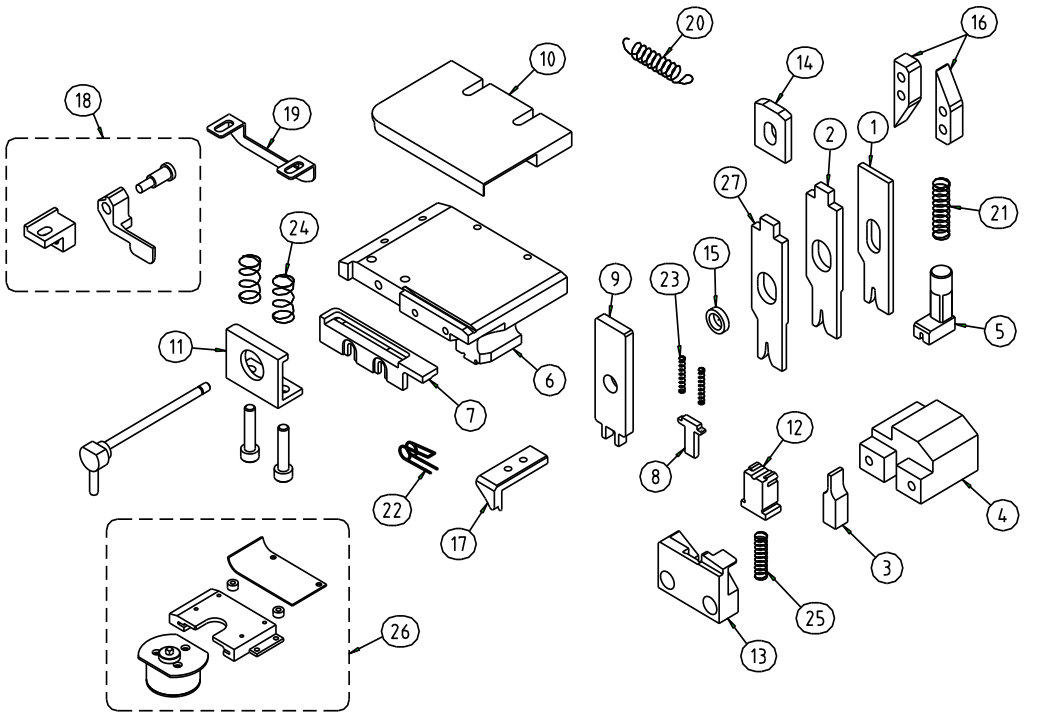
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.888	4.363
2	1.877	4.358
3	1.885	4.353
4	1.889	4.352
5	1.887	4.356
6	1.890	4.360
7	1.887	4.354
8	1.883	4.350
9	1.887	4.348
10	1.890	4.351
11	1.886	4.356
12	1.881	4.352
13	1.884	4.353
14	1.887	4.362
15	1.885	4.364
16	1.883	4.356
17	1.890	4.351
18	1.883	4.356
19	1.890	4.358
20	1.885	4.357
21	1.884	4.364
22	1.881	4.359
23	1.879	4.372
24	1.877	4.368
25	1.882	4.362
26	1.876	4.357
27	1.880	4.362
28	1.876	4.368
29	1.882	4.363
30	1.876	4.358
31	1.874	4.365
32	1.880	4.356
33	1.877	4.352
34	1.876	4.351
35	1.873	4.348
36	1.881	4.344
37	1.883	4.342
38	1.875	4.353
39	1.882	4.355
40	1.874	4.342
41	1.883	4.346
42	1.882	4.356
43	1.881	4.351
44	1.873	4.360
45	1.879	4.351
46	1.878	4.348
47	1.882	4.350
48	1.884	4.356
49	1.877	4.355
50	1.885	4.359
Average	1.88	4.36
Cmk	3.37	4.83

Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	ZZ	TERMINAL No. 端子品番	7214-1840 DD
共通品番	– / –	– / –	– / –



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7214-1840ZZXW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	001	FEEDING CLAW 送り爪
2	7214-1840ZZXID		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7214-1840ZZXAD		ANVIL アンビル	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7214-1840XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7214-1840XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7214-1840XYB		BASE ベース	22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
7	7214-1840XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
10	48A47020	A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ		7214-1840XKP		BRACKET ブラケット
12	7214-1841DDPS		SHEARBLADE シャーブレード	27	~~7214-1840XQ~~		~~STABILIZER CRIMPER~~ ~~スタビライザークリンパー~~
13	7214-1841XP		OUTER SHEARBLADE アウターシャーブレード	〈OPTION オプション〉			
14	48A19007	014	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	7214-1841XPM ①		OUTER SHEARBLADE アウターシャーブレード
15	48A19019	032	BUSH ブッシュ	14	48A47042	002	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	001	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計	ISSUED 発行
					APPRICATION POST 申請部署		
					YTU		
					DESIGNED DATE 設計日		
					04/01/2017		
①	27/07/2026	Change Part Codification	PTC	D.Tavares	S.Junior	C.F.Almeida	
					04/01/2017	04/01/2017	