PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1608E220

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71169617 L1 SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-9617-02	*	MYCR	4514400057	DAIMLER TRUCK - BEV D4

Applicable Terminals for this Tool:

7116-9617-02					

Anvil			Wire Crimper			Insulation Crimper		
7116-9617XA		(1)	7116-9617XW		(1)	7116-9617T-01XIC		(N)
CW (c)	2.02	CW (i) 3.00	CW	2.00		CW	3.003	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.4 mm 0.2 - 0.6 mm	0.15 0.47		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.5 mm	0.13		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.3 mm 0 - 0.3 mm	0.11		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.5 - 1 mm	0.52		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	1.6		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.3 mm	0.01		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable

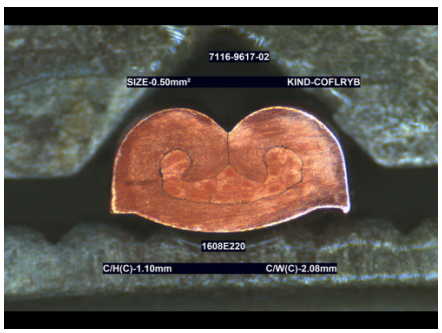
(*) - Specified on Crimping Spec.

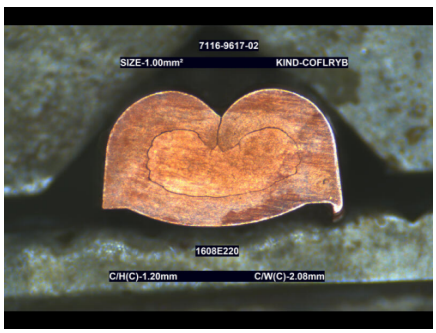
(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.1	1.11	4.22
	+/- 0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.2	1.20	3.25
	+/- 0.05		

REMARKS:

Applicable wire range 0.50mm²~1.00mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº33664
Barbara	Pedro	Dimis Giannos
Date: 26/06/2026	Date: 25/06/2026	Date: 25/06/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°
1608E220

LOWER WIRE KIND & SIZE

C/W(I): 2.97 mm

Wire kind: COFLRYB

Wire size: 0.50 mm²

Nominal Cr. Height:	1.1	2	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.107	2.009
2	1.109	2.010
3	1.111	2.013
4	1.107	2.016
5	1.110	2.013
6	1.104	2.007
7	1.112	2.014
8	1.111	2.008
9	1.110	2.013
10	1.112	2.010
11	1.106	2.015
12	1.113	2.007
13	1.109	2.012
14	1.110	2.011
15	1.108	2.011
16	1.110	2.011
17	1.107	2.011
18	1.111	2.016
19	1.106	2.013
20	1.112	2.010
21	1.112	2.016
22	1.105	2.010
23	1.116	2.018
24	1.106	2.010
25	1.111	2.017
26	1.106	2.006
27	1.115	2.019
28	1.111	2.020
29	1.110	2.024
30	1.110	2.019
31	1.118	2.020
32	1.114	2.019
33	1.111	2.020
34	1.115	2.021
35	1.111	2.022
36	1.113	2.023
37	1.106	2.024
38	1.116	2.022
39	1.109	2.024
40	1.117	2.020
41	1.108	2.022
42	1.107	2.022
43	1.112	2.022
44	1.110	2.022
45	1.110	2.023
46	1.110	2.023
47	1.111	2.023
48	1.112	2.023
49	1.110	2.020
50	1.113	2.024
Average	1.11	2.02
Cmk	4.22	4.99

UPPER WIRE KIND & SIZE

C/W(I): 3.02 mm

Wire kind: COFLRYB

Wire size: 1.00 mm²

Nominal Cr. Height:	1.2	2.2	mm
+/-	0.05	0.1	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.200	2.220
2	1.211	2.216
3	1.195	2.217
4	1.205	2.219
5	1.206	2.212
6	1.204	2.219
7	1.204	2.216
8	1.198	2.216
9	1.204	2.216
10	1.204	2.216
11	1.211	2.216
12	1.206	2.213
13	1.197	2.217
14	1.206	2.215
15	1.197	2.216
16	1.196	2.214
17	1.206	2.213
18	1.195	2.215
19	1.196	2.216
20	1.195	2.217
21	1.202	2.239
22	1.194	2.237
23	1.201	2.217
24	1.197	2.214
25	1.203	2.216
26	1.200	2.215
27	1.201	2.217
28	1.199	2.216
29	1.202	2.219
30	1.201	2.218
31	1.198	2.237
32	1.204	2.220
33	1.196	2.218
34	1.203	2.220
35	1.197	2.220
36	1.201	2.221
37	1.195	2.219
38	1.204	2.221
39	1.196	2.221
40	1.200	2.237
41	1.198	2.237
42	1.200	2.220
43	1.211	2.237
44	1.205	2.223
45	1.197	2.224
46	1.209	2.222
47	1.212	2.229
48	1.213	2.226
49	1.201	2.226
50	1.197	2.232
Average	1.20	2.22
Cmk	3.25	3.64

Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-7767	TERMINAL No. 端子品番	7116-9617L1 -C
共通品番	– –	– –	– –

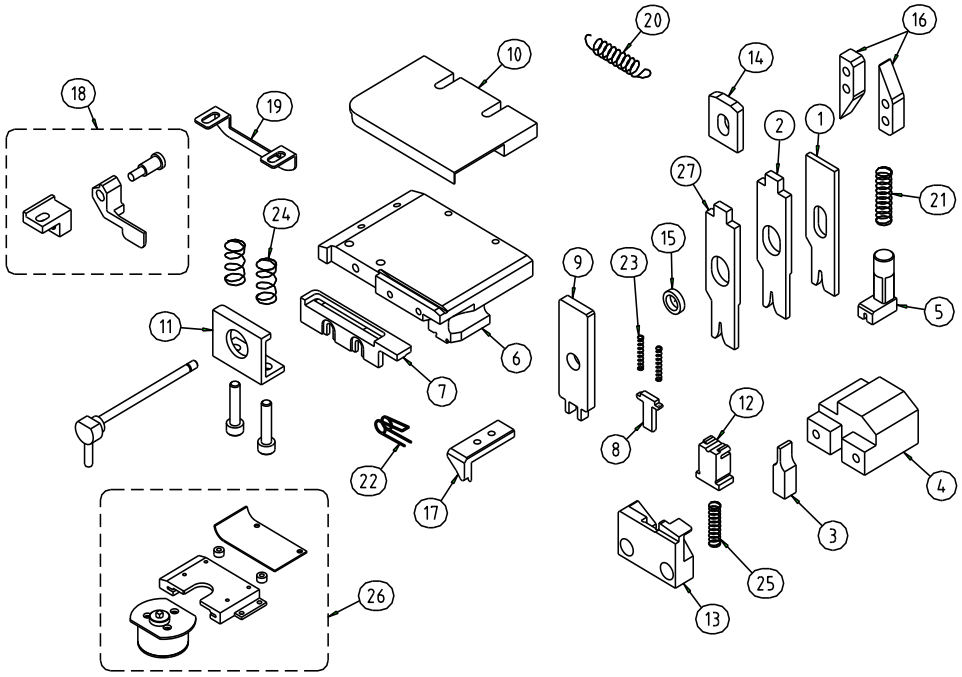

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-9617XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	-001	FEEDING CLAW 送り爪
2	7116-9617T-01XIC	①	INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-9617XA		ANVIL アンビル	19	48A19047	-003	TERMINAL SCRAPER 端子掻き落とし
4	7116-9617XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-9617XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-9617XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-9617XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-001	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
10	48A47020	-A05	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7116-9617XKP		BRACKET ブラケット
12	48A47024	-001	SHEARBLADE シャーブレード	27	~~7116-9617XQ~~		~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	-001	OUTER SHEARBLADE アウターシャーブレード	〈OPTION オプション〉			
14	48A19007	-026	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャーブレード
15	48A19019	-014	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-001	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					PTC		
					DESIGNED DATE 設計日		
					11-05-2020		
					APPROVED 承認	DESIGNED 設計	
①	25-05-2020	7116-9617TXI->7116-9617T-01XIC	PTC	C.Almeida	H.Hasegawa	F.Loureiro	
					11-05-2020	11-05-2020	