PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1608E240

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164916 * SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-4916-02	7157-3345-40	MXDR	4514417508	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7116-4916-02	7116-4916-06		

Anvil			Wire Crimper			Insulation Crimper		
7116-4916XAD		(A)	7116-4916XW		(1)	7116-4916XID		(A2)
CW (c)	1.80	CW (i) 3.38	CW	1.78		CW	3.38	

1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.2 mm 0.2 - 0.6 mm	0.32		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.12		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.3 mm 0 - 0.3 mm	0.09		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 0.6 mm	0.41		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 10 °	2.2		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.4 mm	0.01		The body of the terminal is not twisted.	O


(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

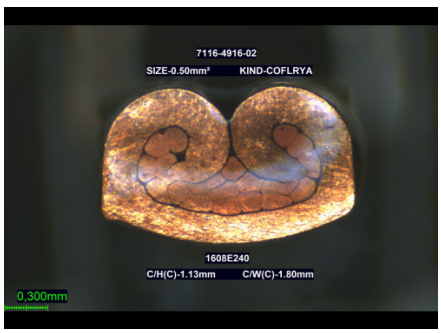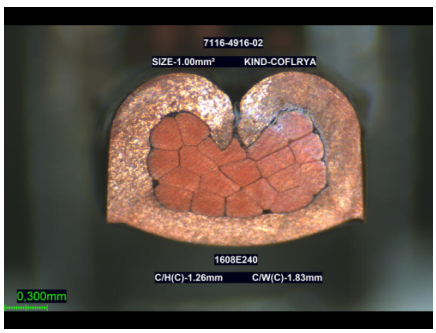2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk		NOMINAL	AVERAGE	Cmk
mm	1.13	1.13	3.77	mm	1.26	1.26	3.93
	+/- 0.05				+/- 0.05		

REMARKS:

Applicable wire range 0.50mm²~1.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº18388	PREPARED (Operator) nº19147
	HELDER ROCHA	RAFAEL VALENTE
Date: 06/08/2026	Date: 06/08/2026	Date: 06/08/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°
1608E240

LOWER WIRE KIND & SIZE

C/W(I): 3.26 mm
Wire kind: COFLRYA
Wire size: 0.50 mm²
Nominal Cr. Height: 1.13 3.1 mm
+/- 0.05 0.1 mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.131	3.100
2	1.128	3.100
3	1.121	3.103
4	1.126	3.104
5	1.129	3.106
6	1.131	3.107
7	1.131	3.111
8	1.133	3.112
9	1.134	3.106
10	1.134	3.101
11	1.122	3.098
12	1.130	3.095
13	1.120	3.095
14	1.120	3.096
15	1.120	3.103
16	1.126	3.103
17	1.126	3.108
18	1.128	3.108
19	1.131	3.108
20	1.133	3.112
21	1.133	3.099
22	1.134	3.113
23	1.135	3.105
24	1.122	3.099
25	1.135	3.095
26	1.131	3.093
27	1.126	3.093
28	1.130	3.089
29	1.132	3.086
30	1.132	3.090
31	1.132	3.097
32	1.133	3.097
33	1.134	3.100
34	1.134	3.102
35	1.131	3.105
36	1.127	3.105
37	1.127	3.109
38	1.128	3.106
39	1.124	3.099
40	1.124	3.099
41	1.125	3.111
42	1.125	3.112
43	1.127	3.105
44	1.130	3.104
45	1.127	3.096
46	1.130	3.092
47	1.132	3.099
48	1.135	3.099
49	1.135	3.096
50	1.131	3.097
Average	1.13	3.10
Cmk	3.77	5.09

UPPER WIRE KIND & SIZE

C/W(I): 3.40 mm
Wire kind: COFLRYA
Wire size: 1.00 mm²
Nominal Cr. Height: 1.26 3.5 mm
+/- 0.05 0.1 mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.258	3.506
2	1.259	3.499
3	1.265	3.501
4	1.266	3.499
5	1.268	3.501
6	1.264	3.502
7	1.264	3.505
8	1.260	3.506
9	1.257	3.507
10	1.259	3.507
11	1.268	3.507
12	1.269	3.509
13	1.270	3.510
14	1.270	3.512
15	1.262	3.509
16	1.259	3.505
17	1.258	3.498
18	1.263	3.499
19	1.263	3.497
20	1.266	3.498
21	1.266	3.514
22	1.261	3.505
23	1.262	3.507
24	1.259	3.508
25	1.257	3.510
26	1.258	3.511
27	1.263	3.508
28	1.266	3.503
29	1.266	3.503
30	1.265	3.501
31	1.262	3.497
32	1.262	3.497
33	1.258	3.499
34	1.255	3.514
35	1.260	3.507
36	1.260	3.507
37	1.264	3.510
38	1.267	3.511
39	1.269	3.506
40	1.267	3.506
41	1.262	3.514
42	1.261	3.512
43	1.265	3.498
44	1.265	3.493
45	1.265	3.492
46	1.260	3.498
47	1.256	3.498
48	1.255	3.501
49	1.257	3.507
50	1.259	3.507
Average	1.26	3.50
Cmk	3.93	5.76


Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1600	TERMINAL No. 端子品番	7116-4916DD

共通品番	9116-1380DD	–	–	–
	–	–		

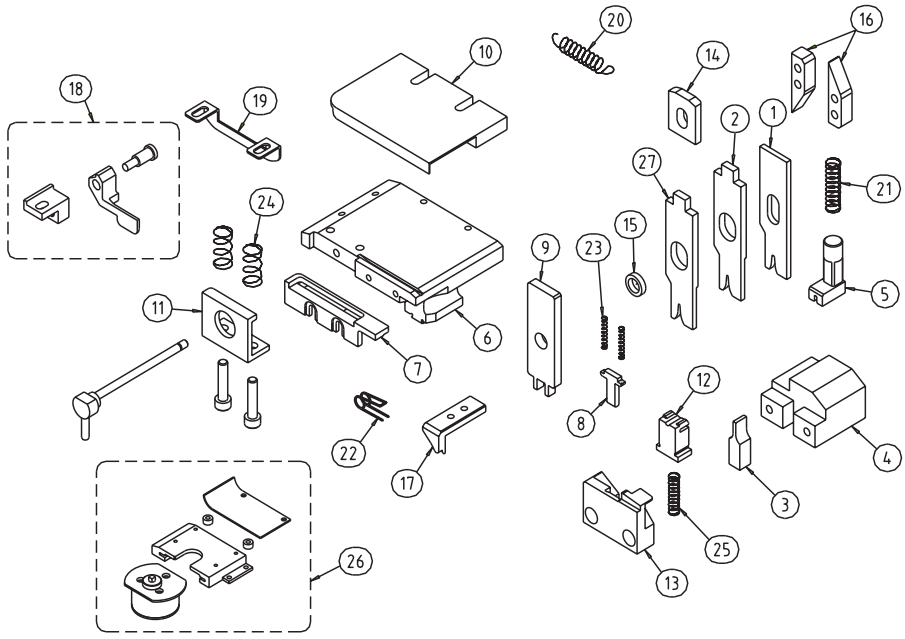

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4916XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ
2	7116-4916XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ
3	7116-4916XAD		ANVIL ｱﾝﾋﾞﾙ
4	7116-4916XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ
5	7116-4916XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ
6	7116-4916XYB		BASE ﾍﾞｰｽ
7	7116-4916XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB
8	48A47016	002	WIRE HOLDER 電線押さえ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ
10	48A47020	A05	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ
12	48A19049	002 ①	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ
13	48A47025	003 ①②	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A19007	022	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ
15	48A19019	-023 ③	BUSH ﾌﾞｯｼｭ
16	48A47014	001	FEEDING CAM 送りｶﾑ

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
17	48A47013	001	FEEDING CLAW 送り爪
18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
21	48A47032	002 ②	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
	7116-4916XKP		BRACKET ﾌﾞﾗｹｯﾄ
27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
〈OPTION オプション〉			
13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
③	8/23/2012	020→023	12I-010	Y.NOZAWA
②	9/11/2007	002→003, 001→002	QX7	T,Suzuki
①	6/26/2007	001→002	QX7	T,Suzuki

APPRICATION POST 申請部署	
HIB	
DESIGNED DATE 設計日	
5/25/2007	
APPROVED 承認	DESIGNED 設計
K,Hiraguchi	T,Suzuki
5/25/2007	5/25/2007

ISSUED 発行

ISSUE
4/27/2018
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.