PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1701E055

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164453 SEQUENCE Nº 9






Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4453-02	*	**04 SIDE FEED**	**YSD-3500139443**	*

Anvil		
7116-4453XAC		(N)
CW (c) 2.63	*CW (i)* 3.53	



Wire Crimper	
7116-4453XW	(1)
CW 2.61	

Insulation Crimper	
7116-4453XIC	(3)
CW 3.53	

1 - VISUAL CHECK ITEMS

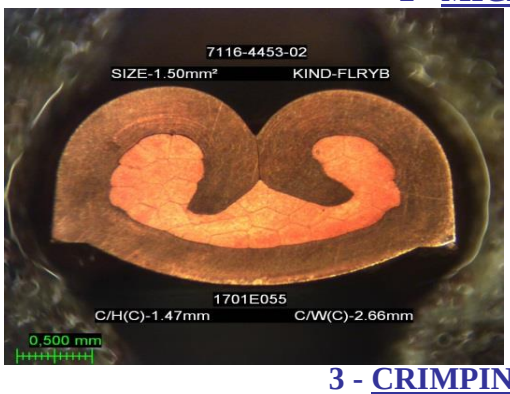
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

O - ok **X** - ng **NA** - not aplicable

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.47	1.47	5.94
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.7	1.70	5.03
	+/-0.05		

REMARKS:

Aplicable Wire Range 1.50mm²~2.50mm²
Wire 1.50mm² C/W(I)-3.52mm
Wire 2.50mm² C/W(I)-3.58mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 678
Date: 2019/Oct/19	Date: 2019/Oct/19	Date: 2019/Oct/18

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1701E055

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 1.5 mm²

Nominal Cr. Height:	1.47	2.9	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.476	2.896
2	1.470	2.898
3	1.472	2.901
4	1.471	2.896
5	1.479	2.898
6	1.479	2.901
7	1.476	2.900
8	1.474	2.895
9	1.471	2.887
10	1.474	2.888
11	1.476	2.899
12	1.478	2.903
13	1.475	2.900
14	1.472	2.898
15	1.471	2.892
16	1.470	2.898
17	1.476	2.901
18	1.478	2.900
19	1.474	2.897
20	1.474	2.893
21	1.471	2.891
22	1.473	2.898
23	1.477	2.894
24	1.473	2.891
25	1.471	2.889
26	1.470	2.896
27	1.469	2.900
28	1.473	2.900
29	1.477	2.901
30	1.475	2.893
31	1.471	2.888
32	1.475	2.886
33	1.475	2.887
34	1.474	2.895
35	1.471	2.898
36	1.469	2.900
37	1.473	2.899
38	1.471	2.893
39	1.471	2.901
40	1.472	2.899
41	1.476	2.895
42	1.475	2.891
43	1.473	2.891
44	1.471	2.894
45	1.471	2.898
46	1.475	2.900
47	1.475	2.895
48	1.474	2.893
49	1.471	2.891
50	1.474	2.896
Average	1.47	2.90
Cmk	5.94	7.19

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 2.5 mm²

Nominal Cr. Height:	1.7	3.3	mm
+/-	0.05	0.1	mm

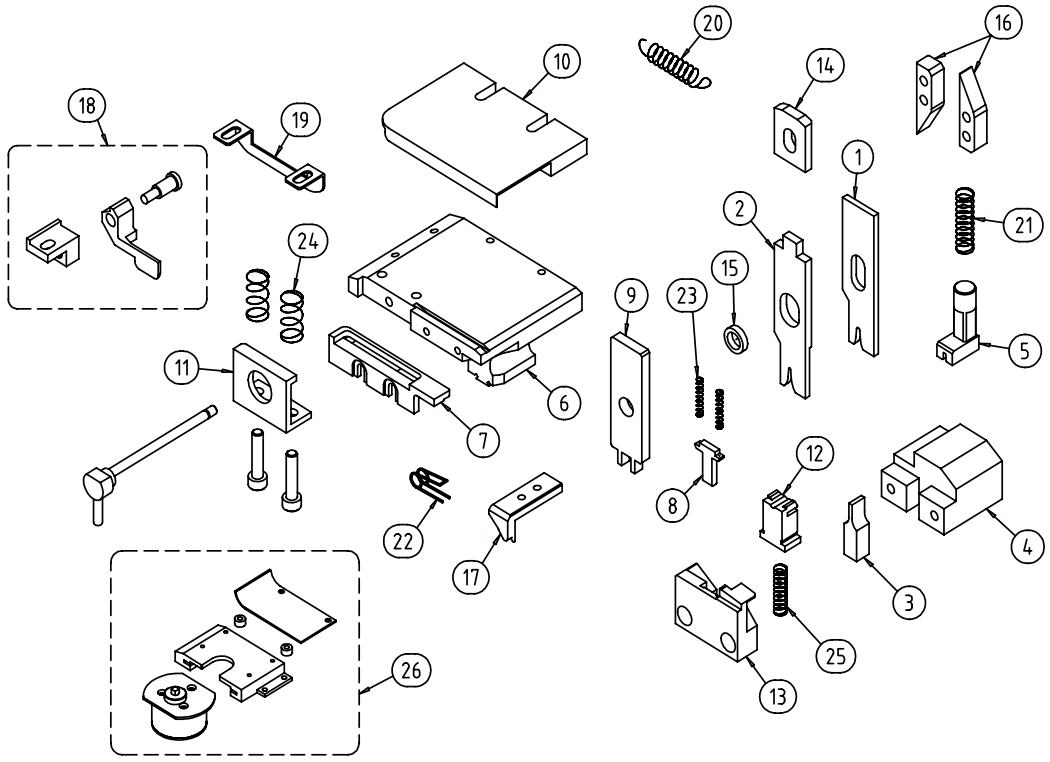
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.700	3.305
2	1.704	3.297
3	1.701	3.303
4	1.706	3.310
5	1.707	3.308
6	1.703	3.305
7	1.702	3.300
8	1.701	3.299
9	1.706	3.305
10	1.710	3.308
11	1.706	3.298
12	1.705	3.299
13	1.702	3.307
14	1.701	3.310
15	1.701	3.308
16	1.705	3.301
17	1.709	3.295
18	1.702	3.305
19	1.701	3.302
20	1.705	3.296
21	1.710	3.292
22	1.708	3.298
23	1.703	3.305
24	1.700	3.306
25	1.703	3.301
26	1.705	3.301
27	1.708	3.307
28	1.705	3.309
29	1.703	3.298
30	1.702	3.297
31	1.701	3.295
32	1.705	3.301
33	1.707	3.306
34	1.710	3.308
35	1.705	3.309
36	1.703	3.303
37	1.701	3.298
38	1.700	3.295
39	1.705	3.295
40	1.708	3.304
41	1.709	3.307
42	1.704	3.301
43	1.701	3.297
44	1.700	3.294
45	1.700	3.302
46	1.704	3.304
47	1.708	3.298
48	1.708	3.298
49	1.706	3.308
50	1.703	3.308
Average	1.70	3.30
Cmk	5.03	6.60

Acceptance criteria: Cmk>= 2.0

END

04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表 ／04 APPLICATOR CONSUMABLE PARTS LIST

製品番号 PRODUCT No.	C0100-4076	端子品番 TERMINAL No.	7116-4453C



No.	部品番号 PARTS No.	図番 DRW. No.	部品名称 PARTS NAME
1	7116-4453XW		ﾜｲﾔｰｸﾘﾝﾊﾟｰ WIRE CRIMPER
2	7116-4453XIC		ｲﾝｼｭｸﾘﾝﾊﾟｰ INSULATION CRIMPER
3	7116-4453XAC		ｱﾝﾋﾞﾙ ANVIL
4	7116-4453CXJE		ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ ANVIL HOLDER
5	7116-4453CXYY		ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ SUPPORTING STOPPER
6	7116-4453CXYB		ﾍﾞｰｽ BASE
7	7116-4453CXYH		ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB TERMINAL GUIDE PLATE B
8	48A47016	001	電線押さえ WIRE HOLDER
9	48A47017	002	切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ CUTTING PUNCH & WIRE HOLDER
10	48A47020	A05 ①	ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA TERMINAL GUIDE PLATE A
11	48A47022	001 ①	ﾀｰﾐﾅﾙ押さえ TERMINAL HOLDER
12	48A47024	002	ｼｬｰﾌﾟﾚｰﾄﾞ SHEARBLADE
13	48A47025	002/101	ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ OUTER SHEARBLADE
14	48A19007	025 ①	ｲﾝｼｭ調整ｺﾏ INSULATION ADJUSTING PIECE
15	48A19019	014	ﾌﾞｯｼｭ BUSH

No.	部品番号 PARTS No.	図番 DRW. No.	部品名称 PARTS NAME
16	48A47014	001	送りｶﾑ FEEDING CAM
17	48A47013		送り爪 FEEDING CLAW
18	48A19100	005	電線ｽﾄｯﾊﾟｰ Assy WIRE STOPPER Assy
19	48A19047	002 ②	端子掻き落とし TERMINAL SCRAPER
20	48A47031		戻しｽﾌﾟﾘﾝｸﾞ RETURN SPRING
21	48A47032	001	ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ SUPPORTING STOPPER SPRING
22	48A19017	003	送り爪ｽﾌﾟﾘﾝｸﾞ FEEDING CLAW SPRING
23	48A19023	001	電線押さえｽﾌﾟﾘﾝｸﾞ WIRE HOLDER SPRING
24	48A19074		ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ TERMINAL HOLDER SPRING
25	48A19050		ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ SHEARBLADE SPRING
26	48A19999		ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ TERMINAL OIL UNIT
27	7116-4453CXKP		ﾌﾞﾗｹｯﾄ BRACKET
<ｵﾌﾟｼｮﾝ OPTION>			
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK	DATE	REVISION RECORD	No.	CHECKED
②	2010/9/13	003→002	10H-046	Y.NOZAWA
①	2007/12/20	CHANGED No.	QX7	T,Suzuki

APPRICATION POST	
専用機	
DESIGNED DATE	
2006/9/4	
APPROVED	DESIGNED
松田	八木
2006/9/4	2006/9/4

ISSUED '12.03.08 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED MARK

YAZAKI