PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1701E125

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72950087 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7295-0087-02	*	MXSR	4514204129	DAIMLER TRUCK - NCP

Applicable Terminals for this Tool:

7295-0087-02	7295-0087-06		

Anvil			Wire Crimper			Insulation Crimper		
7295-0087XA		(N)	7295-0087XW		(N)	7295-0087XI		(N)
CW (c)	1.37	CW (i) 1.78	CW	1.35		CW	1.78	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.3 mm 0.3 - 0.7 mm	0.16 0.43		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.26		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.2 mm 0 - 0.2 mm	0.04		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0 - 0.4 mm	0.36		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	1.3		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 3 °	0.2		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable


(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

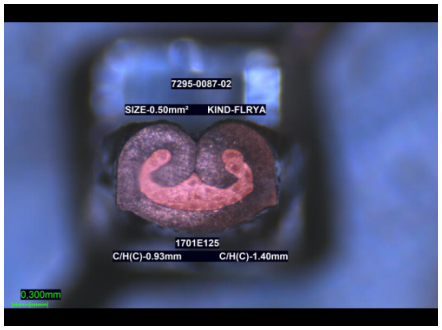



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.93	0.93	6.74
	+/- 0.03		

	NOMINAL	AVERAGE	Cmk
mm	1.05	1.05	6.72
	+/- 0.03		

REMARKS:

Applicable wire range 0.50mm²~0.75mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº44	PREPARED (Operator) nº18388
		HÉLDER ROCHA
Date: 07/05/2025	Date: 06/05/2025	Date: 06/05/2025

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

1701E125

LOWER WIRE KIND & SIZE

C/W(I): 1.87 mm

Wire kind: FLRYA

Wire size: 0.5 mm²

Nominal Cr. Height:	0.93	1.95	mm
+/-	0.03	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	0.928	1.954
2	0.932	1.950
3	0.930	1.952
4	0.932	1.956
5	0.929	1.958
6	0.932	1.948
7	0.930	1.954
8	0.929	1.950
9	0.932	1.955
10	0.930	1.958
11	0.932	1.954
12	0.928	1.958
13	0.930	1.955
14	0.932	1.948
15	0.929	1.952
16	0.932	1.958
17	0.928	1.954
18	0.932	1.955
19	0.930	1.954
20	0.931	1.950
21	0.929	1.954
22	0.932	1.949
23	0.930	1.949
24	0.932	1.954
25	0.928	1.950
26	0.932	1.946
27	0.930	1.954
28	0.932	1.958
29	0.928	1.955
30	0.929	1.949
31	0.930	1.954
32	0.931	1.958
33	0.929	1.950
34	0.932	1.946
35	0.930	1.952
36	0.928	1.954
37	0.932	1.949
38	0.930	1.958
39	0.931	1.955
40	0.929	1.952
41	0.930	1.954
42	0.932	1.955
43	0.929	1.949
44	0.932	1.950
45	0.931	1.958
46	0.928	1.954
47	0.929	1.949
48	0.931	1.958
49	0.929	1.954
50	0.928	1.955
Average	0.93	1.95
Cmk	6.74	9.51

UPPER WIRE KIND & SIZE

C/W(I): 1.91 mm

Wire kind: FLRYA

Wire size: 0.75 mm²

Nominal Cr. Height:	1.05	2.1	mm
+/-	0.03	0.1	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.051	2.099
2	1.052	2.106
3	1.053	2.097
4	1.052	2.106
5	1.051	2.097
6	1.048	2.099
7	1.053	2.104
8	1.051	2.099
9	1.052	2.109
10	1.053	2.106
11	1.051	2.099
12	1.048	2.106
13	1.051	2.099
14	1.053	2.097
15	1.048	2.099
16	1.051	2.098
17	1.052	2.106
18	1.051	2.098
19	1.053	2.098
20	1.051	2.098
21	1.051	2.104
22	1.052	2.098
23	1.051	2.097
24	1.053	2.098
25	1.051	2.098
26	1.052	2.100
27	1.051	2.097
28	1.053	2.106
29	1.051	2.098
30	1.052	2.100
31	1.051	2.109
32	1.051	2.106
33	1.053	2.100
34	1.051	2.104
35	1.048	2.100
36	1.051	2.100
37	1.051	2.106
38	1.052	2.097
39	1.051	2.109
40	1.053	2.109
41	1.048	2.106
42	1.051	2.100
43	1.052	2.104
44	1.051	2.100
45	1.053	2.106
46	1.048	2.100
47	1.052	2.098
48	1.051	2.106
49	1.052	2.109
50	1.051	2.100
Average	1.05	2.10
Cmk	6.72	8.11

Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-5834	TERMINAL No. 端子品番	7295-0087
Common PN 共通品番	–	–	–
	–	–	

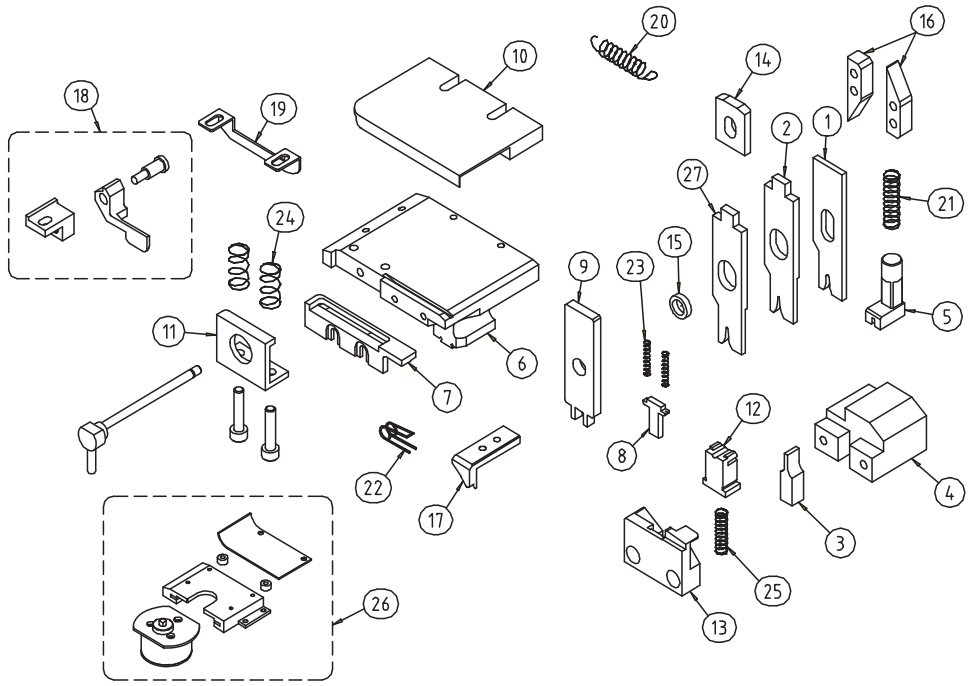

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7295-0087XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	-001	FEEDING CLAW 送り爪
2	7295-0087XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7295-0087XA		ANVIL アンビル	19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
4	7295-0087XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7295-0087XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7295-0087XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7295-0087XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-003①	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレードスプリング
10	48A47020	-A03	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7295-0087XKP		BRACKET ブラケット
12	48A47024	-001	SHEARBLADE シャープレード	27	~~7295-0087XQ~~		~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	-002	OUTER SHEARBLADE アウターシャープレード	〈OPTION オプション〉			
14	48A19007	-022	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャープレード
15	48A19019	-019	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-001	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					YTU-FIAT		REVISED
					DESIGNED DATE 設計日		
					2014/1/13		ISSUE 2016/12/20 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP
					APPROVED 承認	DESIGNED 設計	
①	2016/6/17	CUTTING PUNCH 002→003	16F-110	A.YAMADA	H.HASEGAWA	C.Almeida	
					2015/6/18	2014/1/13	