PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1701E128

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72141840 * SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7214-1840-02	7158-3354-70	MYD2R	4514417508	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7214-1840-02	7214-1840-06		

Anvil			Wire Crimper			Insulation Crimper		
7214-1840ZZXAD		(N)	7214-1840ZZXW		(N)	7214-1840ZZXID		(N)
CW (c)	2.56	*CW (i)* 4.32	*CW*	2.54		*CW*	4.32	

1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.2 mm 0.2 - 0.6 mm	0.53		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.5 mm	0.16		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.3 mm 0 - 0.3 mm	0.17		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 1 mm	0.47		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 5 °	0.9		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.5 mm	0.01		The body of the terminal is not twisted.	O


O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

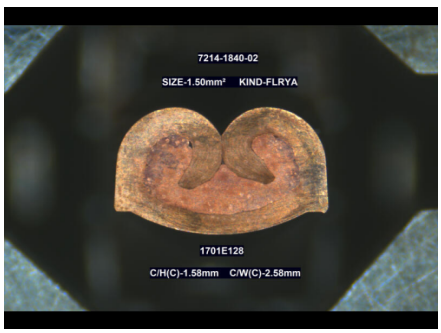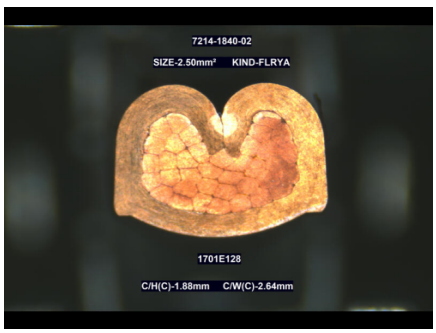2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.58	1.59	3.40
	+/- 0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.88	1.88	3.49
	+/- 0.05		

REMARKS:

Applicable wire range >1.00mm²~2.50mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº5061
Date: 01/09/2026	Date: 31/08/2026	Date: 31/08/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°
1701E128

LOWER WIRE KIND & SIZE

C/W(I): 4.29 mm
Wire kind: FLRYA
Wire size: 1.50 mm²
Nominal Cr. Height: 1.58 4.2 mm
+/- 0.05 0.1 mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.582	4.202
2	1.580	4.213
3	1.576	4.204
4	1.583	4.212
5	1.587	4.209
6	1.589	4.217
7	1.584	4.219
8	1.590	4.222
9	1.588	4.215
10	1.594	4.209
11	1.588	4.208
12	1.591	4.207
13	1.589	4.207
14	1.585	4.212
15	1.591	4.211
16	1.585	4.200
17	1.587	4.193
18	1.592	4.199
19	1.588	4.203
20	1.588	4.206
21	1.584	4.208
22	1.581	4.210
23	1.578	4.208
24	1.585	4.204
25	1.587	4.198
26	1.583	4.210
27	1.582	4.214
28	1.583	4.204
29	1.587	4.201
30	1.585	4.209
31	1.589	4.202
32	1.585	4.212
33	1.580	4.206
34	1.577	4.199
35	1.583	4.207
36	1.580	4.211
37	1.585	4.213
38	1.578	4.216
39	1.587	4.201
40	1.584	4.196
41	1.585	4.205
42	1.590	4.196
43	1.585	4.206
44	1.589	4.209
45	1.591	4.214
46	1.586	4.212
47	1.591	4.200
48	1.593	4.197
49	1.588	4.213
50	1.594	4.203
Average	1.59	4.21
Cmk	3.40	4.87

UPPER WIRE KIND & SIZE

C/W(I): 4.36 mm
Wire kind: FLRYA
Wire size: 2.50 mm²
Nominal Cr. Height: 1.88 4.35 mm
+/- 0.05 0.1 mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.879	4.355
2	1.876	4.363
3	1.883	4.358
4	1.886	4.365
5	1.888	4.356
6	1.883	4.355
7	1.882	4.353
8	1.886	4.352
9	1.888	4.359
10	1.885	4.364
11	1.882	4.366
12	1.887	4.358
13	1.889	4.360
14	1.890	4.359
15	1.885	4.361
16	1.883	4.364
17	1.880	4.366
18	1.879	4.355
19	1.882	4.354
20	1.877	4.348
21	1.881	4.357
22	1.883	4.363
23	1.881	4.366
24	1.877	4.353
25	1.883	4.352
26	1.886	4.349
27	1.889	4.357
28	1.891	4.372
29	1.893	4.357
30	1.887	4.362
31	1.886	4.364
32	1.883	4.368
33	1.882	4.356
34	1.879	4.354
35	1.878	4.353
36	1.884	4.359
37	1.887	4.357
38	1.890	4.363
39	1.895	4.353
40	1.885	4.358
41	1.880	4.354
42	1.877	4.360
43	1.876	4.358
44	1.882	4.351
45	1.877	4.364
46	1.882	4.370
47	1.885	4.355
48	1.880	4.344
49	1.886	4.349
50	1.881	4.352
Average	1.88	4.36
Cmk	3.49	5.19

Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	ZZ	TERMINAL No. 端子品番	7214-1840 DD
共通品番	– / –	– / –	– / –

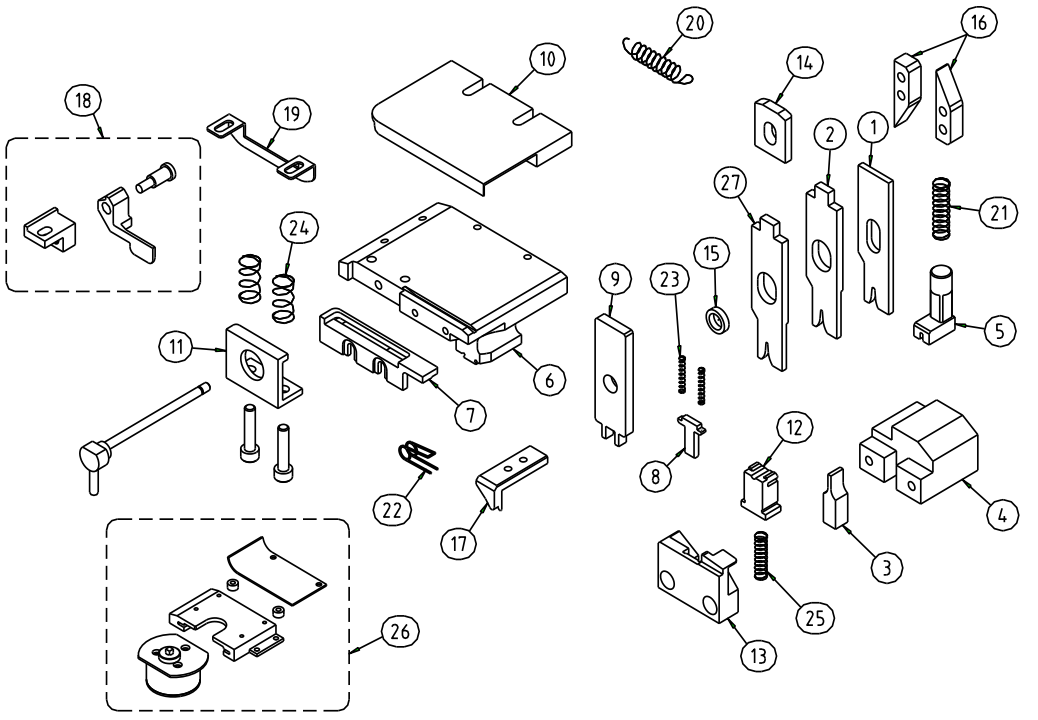

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7214-1840ZZXW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	001	FEEDING CLAW 送り爪
2	7214-1840ZZXID		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7214-1840ZZXAD		ANVIL アンビル	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7214-1840XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7214-1840XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7214-1840XYB		BASE ベース	22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
7	7214-1840XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
10	48A47020	A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ		7214-1840XKP		BRACKET ブラケット
12	7214-1841DDPS		SHEARBLADE シャーブレード	27	~~7214-1840XQ~~		~~STABILIZER CRIMPER~~ ~~スタビライザークリンパー~~
13	7214-1841XP		OUTER SHEARBLADE アウターシャーブレード	〈OPTION オプション〉			
14	48A19007	014	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	7214-1841XPM ①		OUTER SHEARBLADE アウターシャーブレード
15	48A19019	032	BUSH ブッシュ	14	48A47042	002	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	001	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計	ISSUED 発行
					APPRICATION POST 申請部署		
					YTU		
					DESIGNED DATE 設計日		
					04/01/2017		
①	27/07/2026	Change Part Codification	PTC	D.Tavares	S.Junior	C.F.Almeida	
					04/01/2017	04/01/2017	