PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1703E098

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7316-8096 * SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7316-8096-02	*	**MXCR**	**YSD-4514078965**	**AIMLER TRUCK B**

Applicable Terminals for this Tool:

7316-8096-02							

Anvil			Wire Crimper			Insulation Crimper		
7316-8096XA		(1)	7316-8096XW		(1)	7316-8096XIC		(1)
CW (c)	1,92	*CW (i)* 2,70	*CW*	1,90		*CW*	2,70	


1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
					O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	O	0~0.20mm 0.20~0.60mm	0 0.42		The Bell Mouth is within the spec.**(*)**	O
	Not found any Bell Mouth in the insulation area.	O	0~0.30mm	0.18		The dimension of the cutting carrier is within the spec.**(*)**	O
	The lance height and shape are not deformed.	O	0~0.30mm 0~0.30mm	0.06 -		Bend up and Bend down are within the criteria**(*)**	O
	Not found any burr in the cutting carrier.	O	0.10~0.50mm	0.44		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	5º	0.5		The terminal is not bent sideway, look-king from the top**(*)**	O
	The wire barrel is free from major burrs.	O	0~0.30mm	0.05		The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

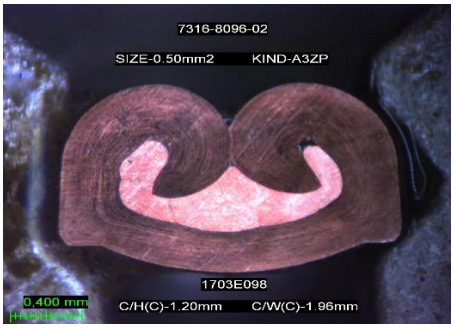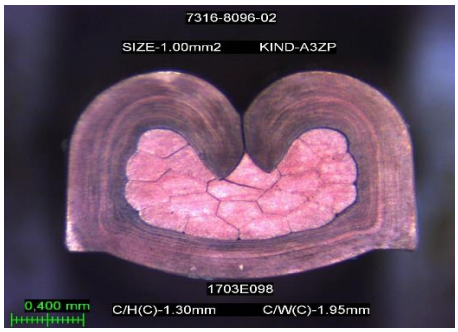2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,2	1,20	5,45
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1,3	1,30	7,40
	+/-0.05		

REMARKS:

Aplicable wire range-0.50~1.00mm^2
Size 0.50mm^2 C/W(I)-2.68mm
Size 1.00mm^2 C/W(I)-2.73mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2024/jul/08	Date: 2024/jun/28	Date: 2024/jun/27

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1703E098

LOWER WIRE KIND & SIZE

Wire kind: A3ZP

Wire size: 0,5 mm^2

Nominal Cr. Height:	1,2	2,2	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,201	2,201
2	1,206	2,204
3	1,202	2,207
4	1,200	2,204
5	1,202	2,201
6	1,205	2,199
7	1,203	2,198
8	1,201	2,199
9	1,198	2,203
10	1,199	2,204
11	1,202	2,208
12	1,204	2,208
13	1,204	2,206
14	1,204	2,204
15	1,202	2,205
16	1,199	2,208
17	1,200	2,207
18	1,202	2,195
19	1,207	2,196
20	1,205	2,197
21	1,204	2,194
22	1,200	2,191
23	1,201	2,192
24	1,204	2,206
25	1,206	2,204
26	1,204	2,199
27	1,201	2,202
28	1,202	2,203
29	1,204	2,206
30	1,207	2,205
31	1,208	2,205
32	1,206	2,201
33	1,205	2,200
34	1,202	2,204
35	1,203	2,204
36	1,208	2,202
37	1,208	2,204
38	1,206	2,205
39	1,204	2,206
40	1,205	2,205
41	1,207	2,203
42	1,209	2,199
43	1,208	2,200
44	1,207	2,202
45	1,204	2,205
46	1,205	2,205
47	1,208	2,201
48	1,208	2,202
49	1,207	2,202
50	1,204	2,200
Average	1,20	2,20
Cmk	5,45	8,17

UPPER WIRE KIND & SIZE

Wire kind: A3ZP

Wire size: 1 mm^2

Nominal Cr. Height:	1,3	2,3	mm
+/-	0,05	0,1	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,306	2,312
2	1,309	2,308
3	1,306	2,304
4	1,303	2,301
5	1,300	2,303
6	1,301	2,306
7	1,305	2,303
8	1,307	2,303
9	1,304	2,300
10	1,300	2,301
11	1,302	2,303
12	1,304	2,307
13	1,305	2,306
14	1,306	2,304
15	1,303	2,302
16	1,301	2,307
17	1,302	2,305
18	1,307	2,304
19	1,305	2,302
20	1,303	2,301
21	1,302	2,304
22	1,306	2,308
23	1,307	2,305
24	1,305	2,304
25	1,303	2,302
26	1,302	2,302
27	1,302	2,306
28	1,302	2,304
29	1,305	2,304
30	1,303	2,308
31	1,302	2,308
32	1,301	2,308
33	1,302	2,306
34	1,303	2,304
35	1,303	2,304
36	1,303	2,309
37	1,305	2,308
38	1,307	2,306
39	1,305	2,300
40	1,305	2,304
41	1,307	2,307
42	1,302	2,308
43	1,302	2,307
44	1,302	2,304
45	1,302	2,296
46	1,303	2,295
47	1,302	2,293
48	1,302	2,293
49	1,303	2,295
50	1,302	2,296
Average	1,30	2,30
Cmk	7,40	7,66

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1855	TERMINAL No. 端子品番	7316-8096C

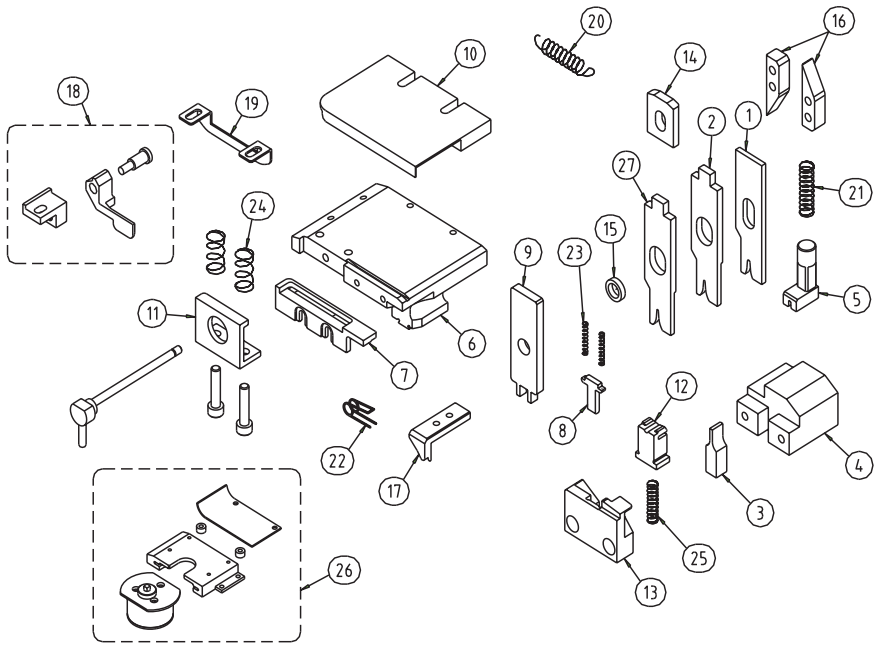

No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
1	7316-8096XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ
2	7316-8096XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ
3	7316-8096XA		ANVIL ｱﾝﾋﾞﾙ
4	7316-8096XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ
5	7316-8096XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ
6	7316-8096XYB		BASE ﾍﾞｰｽ
7	7316-8096XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB
8	48A47016	001	WIRE HOLDER 電線押さえ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ
10	48A47020	A05 ②④	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ
12	48A47024	002 ②	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ
13	48A47025	003 ②	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A19007	025③	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ
15	48A19019	013	BUSH ﾌﾞｯｼｭ

No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
16	48A47014	001	FEEDING CAM 送りｶﾑ
17	48A47013		FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
23	48A19023	001	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
	7316-8096XKP		BRACKET ﾌﾞﾗｹｯﾄ
27	-		~~STABILIZER CRIMPER~~ ~~ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
〈オプション OPTION〉			
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
④	2011/7/5	A04→A05	11F-052	Y.YAGI
③	2009/6/3	023→025	QX7	C.Abe
②	2007/5/17	CHANGED PART No.	QX7	T.Suzuki
①	2007/3/20	CHANGED PART No.	07C-031	鈴木

APPRICATION POST 申請部署	
PTC	
DESIGNED DATE 設計日	
2007/3/1	
APPROVED 承認	DESIGNED 設計
K.Hiraguchi	T.Suzuki
2007/3/1	2007/3/1

ISSUED 発行

ISSUE
2021/06/24
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.