PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)





Applicator Serial Nº
A0201717

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70037831 SEQUENCE Nº 9



Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7003-7831-02	*	**BC**	**YSD-3500207944**	*

Anvil		Wire Crimper		Insulation Crimper	
7003-7831-00BA	(N)	7003-7831-00BW	(N)	NA	
CW (c) 15.00	*CW (i)*	*CW* 14.36		*CW*	

1 - VISUAL CHECK ITEMS

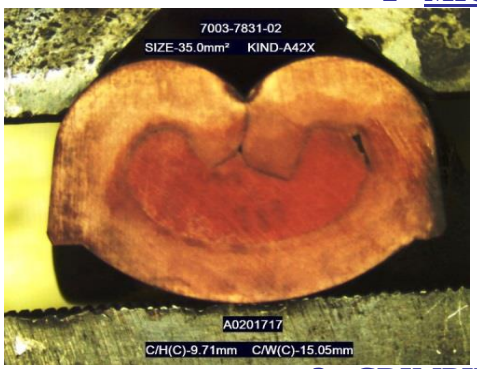
	The two sides of the insulation grips are in the correct position.	**NA**
	Not found any Bell Mouth in the insulation area.	**NA**
	The lance height and shape are not deformed.	**NA**
	Not found any burr in the cutting carrier.	**NA**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

O - ok **X** - ng **NA** - not aplicable

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	9.7	9.72	3.81
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	10.1	10.11	4.87
	+/-0.2		

REMARKS:

Aplicable wire range-35.0mm²~50.0mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2021/Mar/15	Date: 2021/Mar/08	Date: 2021/Mar/02

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0201717

LOWER WIRE KIND & SIZE

Wire kind:	A42X		
Wire size:	35		mm^2
Nominal Cr. Height:	9.7	NA	mm
+/-	0.2	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	9.710	
2	9.720	
3	9.705	
4	9.721	
5	9.704	
6	9.697	
7	9.714	
8	9.725	
9	9.714	
10	9.711	
11	9.730	
12	9.719	
13	9.699	
14	9.714	
15	9.712	
16	9.689	
17	9.697	
18	9.731	
19	9.740	
20	9.712	
21	9.698	
22	9.734	
23	9.741	
24	9.702	
25	9.722	
26	9.733	
27	9.719	
28	9.705	
29	9.717	
30	9.740	
31	9.744	
32	9.726	
33	9.702	
34	9.701	
35	9.735	
36	9.749	
37	9.714	
38	9.708	
39	9.734	
40	9.748	
41	9.751	
42	9.735	
43	9.713	
44	9.705	
45	9.714	
46	9.737	
47	9.726	
48	9.707	
49	9.731	
50	9.736	
Average	9.72	
Cmk	3.81	

UPPER WIRE KIND & SIZE

Wire kind:	A42X		
Wire size:	50		mm^2
Nominal Cr. Height:	10.1	NA	mm
+/-	0.2	NA	mm

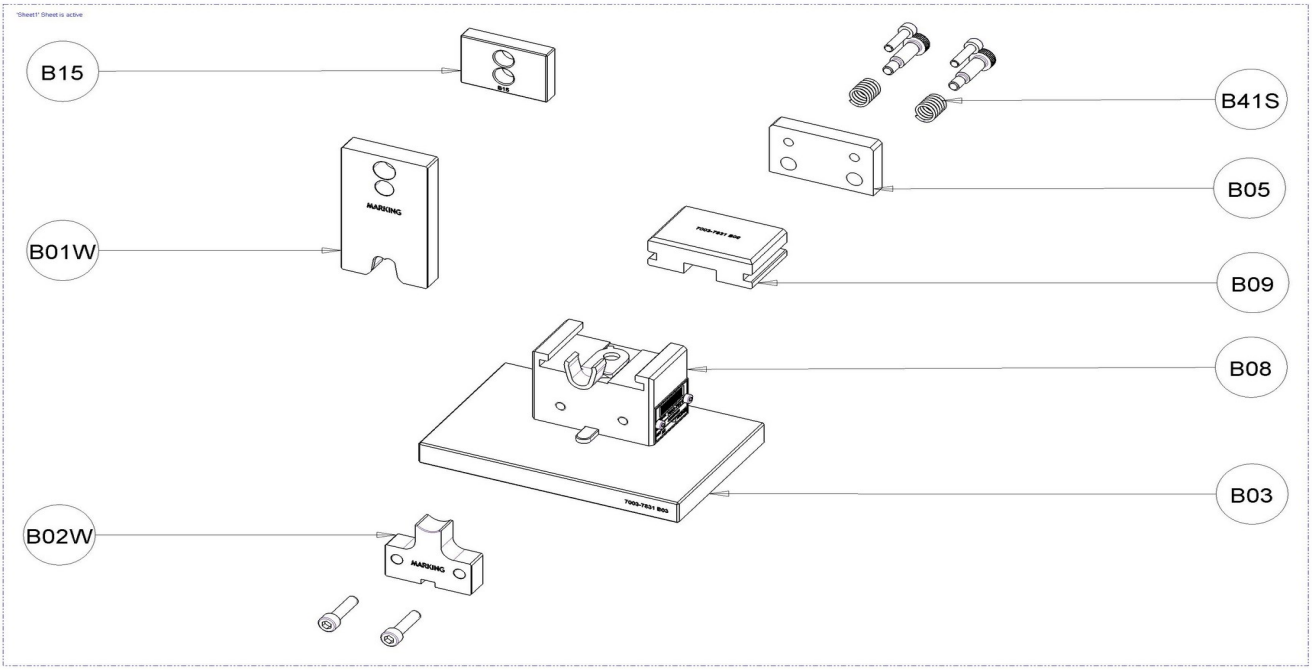
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	10.112	
2	10.120	
3	10.130	
4	10.112	
5	10.117	
6	10.105	
7	10.117	
8	10.125	
9	10.095	
10	10.108	
11	10.102	
12	10.095	
13	10.120	
14	10.125	
15	10.096	
16	10.109	
17	10.116	
18	10.102	
19	10.110	
20	10.100	
21	10.129	
22	10.108	
23	10.112	
24	10.139	
25	10.143	
26	10.125	
27	10.116	
28	10.104	
29	10.117	
30	10.135	
31	10.107	
32	10.105	
33	10.100	
34	10.118	
35	10.123	
36	10.095	
37	10.101	
38	10.122	
39	10.101	
40	10.124	
41	10.100	
42	10.097	
43	10.132	
44	10.136	
45	10.115	
46	10.106	
47	10.097	
48	10.095	
49	10.110	
50	10.122	
Average	10.11	
Cmk	4.87	

Acceptance criteria: Cmk>= 2.0

END

APP BATTERY CABLE CONSUMABLE PART LIST

A0201717	7003-7831G1



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01	***7003-7831-00BW***	WIRE CRIMPER	1
B02	***7003-7831-00BA***	ANVIL	1
B03	7003-7831 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7003-7831 B08	MAIN BLOCK	1
B09	7003-7831 B09	SLIDER	1
B15	B15	FRAME SPACER	1
B41S	***41P00000811***	SPRING	2