PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0202165

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7003-7570 * SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7003-7570-02	*	**BC**	**YSD 45141075748**	**DAIMLER**

Applicable Terminals for this Tool:

7003-7570-02							

Anvil			Wire Crimper			Insulation Crimper		
7003-7570BAN/7003-7570BAP		(N/N)	7003-7570BW		(N)	7003-7570BI		(N)
CW (c)	14,20	*CW (i)* 17,50	*CW*	14,20		*CW*	17,50	


1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
							O - ok X - ng NA - not aplicable
	The two sides of the insulation grips are in the correct position.	O	0.00~1.00mm 1.50~2.50mm	0.61 1.73		The Bell Mouth is within the spec.(*)	O
	Not found any Bell Mouth in the insulation area.	O				The dimension of the cutting carrier is within the spec.(*)	NA
	The lance height and shape are not deformed.	O	5º 5º	1 --		Bend up and Bend down are within the criteria(*)	O
	Not found any burr in the cutting carrier.	O	0.00~2.00mm	1.50		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	3º	0.4		The terminal is not bent sideway, look-king from the top(*)	O
	The wire barrel is free from major burrs.	O	3º	0.2		The body of the terminal is not twisted(*)	O

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

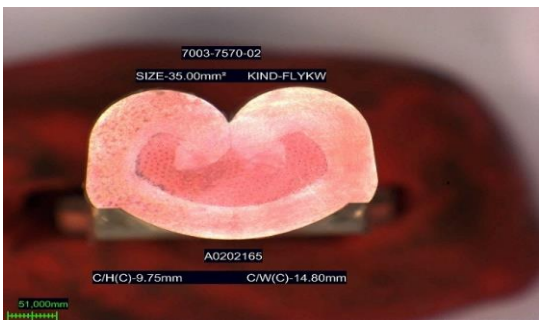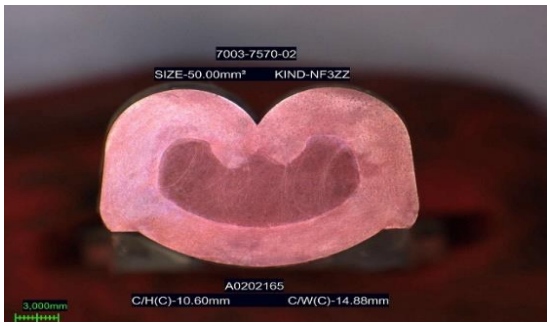2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk		NOMINAL	AVERAGE	Cmk
mm	9,75	9,75	9,23	mm	10,6	10,60	8,59
	+/-0.1				**+/-0.1**		

REMARKS:

Aplicable wire range 35.00mm²~50.00mm²
SIZE-35.00mm² C/W(I)-16.69mm
SIZE-50.00mm² C/W(I)-17.10mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2024/jul/08	Date: 2024/jul/01	Date: 2024/jul/01

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0202165

LOWER WIRE KIND & SIZE

Wire kind: FLYKW

Wire size: 35 mm²

Nominal Cr. Height:	9,75	13,8	mm
+/-	0,1	0,5	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	9,751	13,808
2	9,752	13,799
3	9,749	13,793
4	9,752	13,810
5	9,751	13,810
6	9,752	13,793
7	9,746	13,807
8	9,752	13,805
9	9,758	13,819
10	9,752	13,819
11	9,749	13,789
12	9,752	13,797
13	9,746	13,808
14	9,751	13,799
15	9,759	13,808
16	9,749	13,805
17	9,752	13,808
18	9,751	13,793
19	9,752	13,818
20	9,754	13,789
21	9,746	13,799
22	9,752	13,816
23	9,751	13,793
24	9,752	13,807
25	9,752	13,809
26	9,759	13,806
27	9,752	13,799
28	9,752	13,789
29	9,751	13,805
30	9,758	13,799
31	9,752	13,816
32	9,754	13,806
33	9,752	13,809
34	9,746	13,797
35	9,752	13,808
36	9,759	13,810
37	9,751	13,819
38	9,754	13,805
39	9,749	13,806
40	9,758	13,789
41	9,751	13,797
42	9,752	13,809
43	9,746	13,793
44	9,752	13,810
45	9,751	13,797
46	9,758	13,808
47	9,759	13,799
48	9,752	13,789
49	9,746	13,806
50	9,752	13,797
Average	9,75	13,80
Cmk	9,23	19,27

UPPER WIRE KIND & SIZE

Wire kind: NF3ZZ

Wire size: 50 mm²

Nominal Cr. Height:	10,6	16	mm
+/-	0,1	0,5	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	10,603	16,001
2	10,601	16,000
3	10,608	16,003
4	10,600	16,008
5	10,602	16,006
6	10,609	16,000
7	10,605	16,001
8	10,609	16,000
9	10,603	16,006
10	10,600	16,000
11	10,602	16,003
12	10,603	16,001
13	10,603	16,015
14	10,605	16,000
15	10,603	16,003
16	10,597	16,008
17	10,603	16,006
18	10,603	16,005
19	10,597	16,008
20	10,603	16,004
21	10,601	16,001
22	10,603	16,004
23	10,603	16,000
24	10,605	16,008
25	10,603	16,003
26	10,609	16,021
27	10,597	16,000
28	10,600	16,001
29	10,603	16,005
30	10,597	16,008
31	10,597	16,004
32	10,601	16,000
33	10,609	16,008
34	10,608	16,082
35	10,603	16,005
36	10,597	16,000
37	10,603	16,008
38	10,601	16,005
39	10,602	16,004
40	10,609	16,003
41	10,608	16,008
42	10,597	16,000
43	10,603	16,001
44	10,601	16,004
45	10,597	16,008
46	10,603	16,008
47	10,608	16,001
48	10,609	16,004
49	10,597	16,003
50	10,603	16,005
Average	10,60	16,01
Cmk	8,59	14,05

Acceptance criteria: Cmk>= 2,0

END

APP BATTERY CABLE CONSUMABLE PART LIST

A0202165	7003-7570

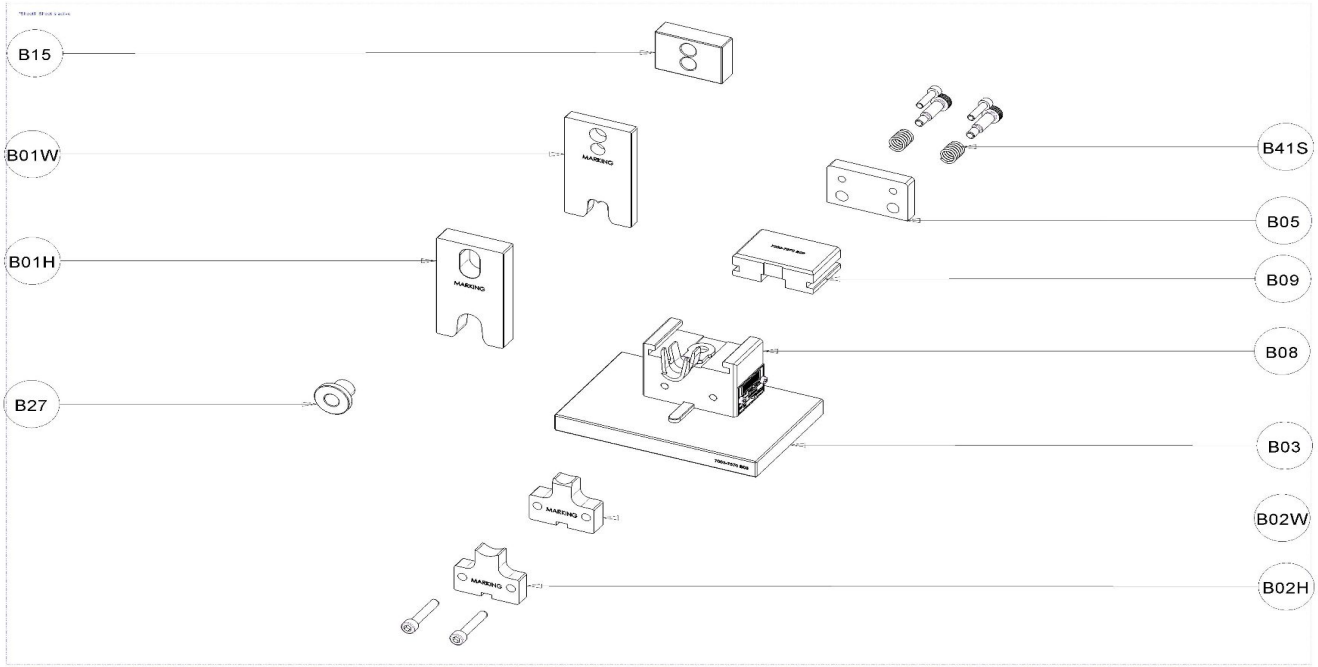

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01H	***7003-7570BI***	INSULATION CRIMPER	1
B01W	***7003-7570BW***	WIRE CRIMPER	1
B02H	***7003-7570BAP***	INSULATION ANVIL	1
B02W	***7003-7570BAN***	WIRE ANVIL	1
B03	7003-7570 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7003-7570 B08	MAIN BLOCK	1
B09	7003-7570 B09	SLIDER	1
B15	7003-7570 B15	FRAME SPACER	1
B27	***7003-7570BYC***	BUSH	1
B41S	41P00000811	SPRING	2