PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0202210

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7003-7891 G1 SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7003-7891-02	*	**BC**	**YSD 4514075748**	**MLER TRUCK BEV**

Applicable Terminals for this Tool:

7003-7891-02			

Anvil			Wire Crimper		Insulation Crimper	
7003-7891-Z0BAN/7003-7891-Z0BAP	(N/N)		7003-7891-Z0BW	(N)	7003-7891-Z0BI	(N)
CW (c) 11,40	*CW (i)* 13,00		*CW* 11,40		*CW* 13,00	


1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
							O - ok X - ng NA - not aplicable
	The two sides of the insulation grips are in the correct position.	O	0.00~1.00mm 1.00~1.50mm	0.64 1.13		The Bell Mouth is within the spec.(*)	O
	Not found any Bell Mouth in the insulation area.	O				The dimension of the cutting carrier is within the spec.(*)	NA
	The lance height and shape are not deformed.	O	3º 3º	-- 0.5		Bend up and Bend down are within the criteria(*)	O
	Not found any burr in the cutting carrier.	O	0.10~2.50mm	1.49		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	5º	0.3		The terminal is not bent sideway, look-king from the top(*)	O
	The wire barrel is free from major burrs.	O	3º	0.4		The body of the terminal is not twisted(*)	O

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

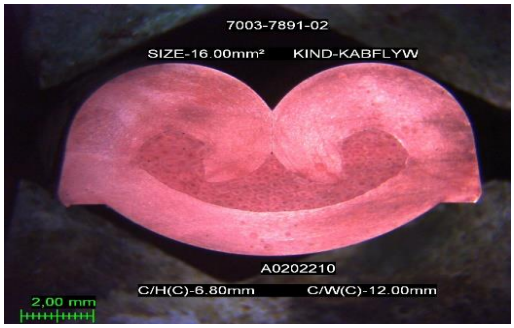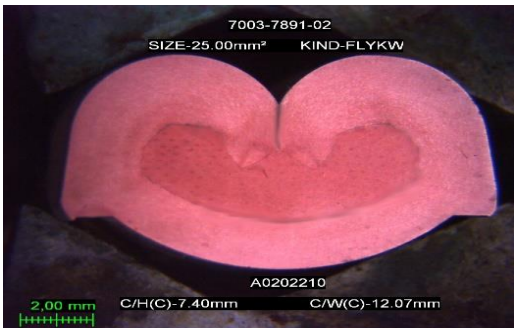2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	6,8	6,80	7,94
	+/-0.1		

	NOMINAL	AVERAGE	Cmk
mm	7,4	7,40	8,10
	+/-0.1		

REMARKS:

Aplicable wire range 16.00mm²~25.00mm²
SIZE-16.00mm² C/W(I)-12.63mm
SIZE-25.00mm² C/W(I)-13.10mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2024/out/17	Date: 2024/out/16	Date: 2024/out/16

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0202210

LOWER WIRE KIND & SIZE

Wire kind: KABFLYW

Wire size: 16 mm²

Nominal Cr. Height:	6,8	9,5	mm
+/-	0,1	0,2	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	6,800	9,503
2	6,806	9,496
3	6,798	9,502
4	6,803	9,503
5	6,806	9,504
6	6,812	9,508
7	6,808	9,498
8	6,800	9,503
9	6,806	9,504
10	6,806	9,512
11	6,800	9,503
12	6,798	9,508
13	6,803	9,498
14	6,800	9,505
15	6,800	9,503
16	6,803	9,503
17	6,806	9,508
18	6,800	9,504
19	6,797	9,496
20	6,812	9,503
21	6,800	9,503
22	6,800	9,504
23	6,800	9,494
24	6,798	9,508
25	6,806	9,505
26	6,800	9,496
27	6,801	9,502
28	6,803	9,503
29	6,798	9,508
30	6,798	9,503
31	6,800	9,504
32	6,808	9,505
33	6,801	9,498
34	6,812	9,508
35	6,800	9,494
36	6,800	9,504
37	6,803	9,503
38	6,800	9,503
39	6,798	9,512
40	6,800	9,503
41	6,800	9,504
42	6,798	9,503
43	6,806	9,503
44	6,800	9,494
45	6,812	9,505
46	6,800	9,503
47	6,800	9,502
48	6,798	9,503
49	6,800	9,498
50	6,800	9,502
Average	6,80	9,50
Cmk	7,94	16,00

UPPER WIRE KIND & SIZE

Wire kind: FLYKW

Wire size: 25 mm²

Nominal Cr. Height:	7,4	11,7	mm
+/-	0,1	0,2	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	7,405	11,707
2	7,397	11,700
3	7,402	11,707
4	7,408	11,698
5	7,405	11,706
6	7,412	11,697
7	7,405	11,704
8	7,402	11,706
9	7,405	11,698
10	7,400	11,700
11	7,408	11,697
12	7,401	11,709
13	7,405	11,704
14	7,397	11,706
15	7,400	11,701
16	7,408	11,708
17	7,405	11,700
18	7,396	11,709
19	7,405	11,701
20	7,408	11,706
21	7,402	11,697
22	7,396	11,706
23	7,397	11,708
24	7,405	11,698
25	7,402	11,704
26	7,401	11,706
27	7,405	11,706
28	7,397	11,701
29	7,396	11,700
30	7,405	11,706
31	7,400	11,697
32	7,397	11,706
33	7,405	11,700
34	7,408	11,709
35	7,401	11,697
36	7,405	11,706
37	7,402	11,701
38	7,405	11,706
39	7,405	11,698
40	7,405	11,704
41	7,408	11,709
42	7,405	11,701
43	7,401	11,706
44	7,402	11,698
45	7,405	11,709
46	7,400	11,706
47	7,408	11,697
48	7,397	11,709
49	7,405	11,701
50	7,397	11,706
Average	7,40	11,70
Cmk	8,10	15,89

Acceptance criteria: Cmk>= 2,0

END

APP BATTERY CABLE CONSUMABLE PART LIST

A0202210	7003-7891G1

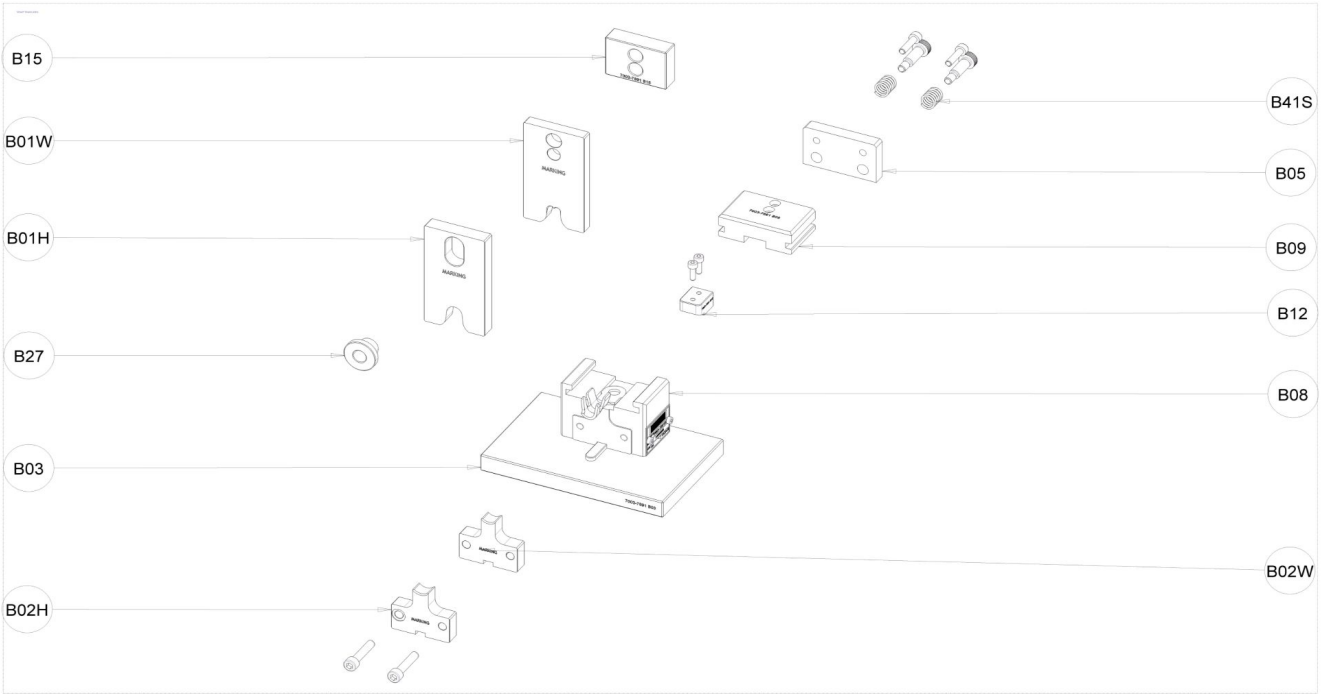

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01H	***7003-7891-Z0BI***	INSULATION CRIMPER	1
B01W	***7003-7891-Z0BW***	WIRE CRIMPER	1
B02H	***7003-7891-Z0BAP***	INSULATION ANVIL	1
B02W	***7003-7891-Z0BAN***	WIRE ANVIL	1
B03	7003-7891 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7003-7891 B08	MAIN BLOCK	1
B09	7003-7891 B09	SLIDER	1
B12	7003-7891 B12	TERMINAL STOPPER	1
B15	7003-7891 B15	FRAME SPACER	1
B27	***7003-7891BYC***	BUSH	1
B41S	41P00000811	SPRING	2