PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0202215

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5623 G1 SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5623-02	*	**BC**	**YSD 4514127913**	**MLER TRUCK BEV**

Applicable Terminals for this Tool:

7004-5623-02			

Anvil		Wire Crimper		Insulation Crimper	
7004-5623-Z0BA	(N)	7004-5623-Z0BW	(N)	NA	
CW (c) 10,34	*CW (i)*	*CW* 10,34		*CW*	


1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
							O - ok X - ng NA - not aplicable
	The two sides of the insulation grips are in the correct position.	NA	0.00~1.50mm 0.00~1.50mm	0.66 0.32		The Bell Mouth is within the spec.(*)	O
	Not found any Bell Mouth in the insulation area.	NA				The dimension of the cutting carrier is within the spec.(*)	NA
	The lance height and shape are not deformed.	O	3º 3º	1.5 --		Bend up and Bend down are within the criteria(*)	O
	Not found any burr in the cutting carrier.	O	0.00~2.00mm	0.67		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	3º	0.4		The terminal is not bent sideway, look-king from the top(*)	O
	The wire barrel is free from major burrs.	O	2º	0.2		The body of the terminal is not twisted(*)	O

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

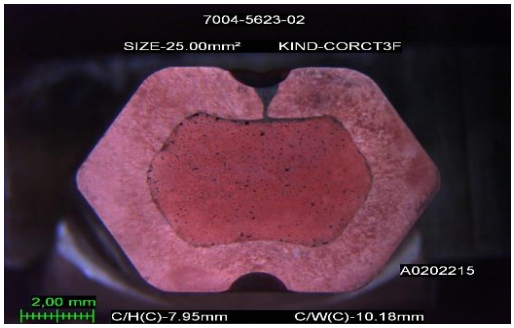2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	7,95	7,95	12,58
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range 25.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2024/dez/09	Date: 2024/dez/06	Date: 2024/dez/06

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0202215

LOWER WIRE KIND & SIZE

Wire kind: CORCT3F

Wire size: 25 mm²

Nominal Cr. Height:	7,95	NA	mm
+/-	0,2	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	7,953	
2	7,961	
3	7,947	
4	7,955	
5	7,945	
6	7,958	
7	7,952	
8	7,953	
9	7,961	
10	7,952	
11	7,962	
12	7,947	
13	7,953	
14	7,955	
15	7,952	
16	7,953	
17	7,961	
18	7,953	
19	7,955	
20	7,963	
21	7,953	
22	7,953	
23	7,961	
24	7,953	
25	7,962	
26	7,953	
27	7,958	
28	7,952	
29	7,953	
30	7,956	
31	7,953	
32	7,955	
33	7,947	
34	7,961	
35	7,955	
36	7,945	
37	7,953	
38	7,961	
39	7,953	
40	7,947	
41	7,961	
42	7,945	
43	7,961	
44	7,953	
45	7,958	
46	7,961	
47	7,947	
48	7,956	
49	7,947	
50	7,961	
Average	7,95	
Cmk	12,58	

UPPER WIRE KIND & SIZE

Wire kind: NA

Wire size: NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP BATTERY CABLE CONSUMABLE PART LIST

A0202215	7004-5623G1

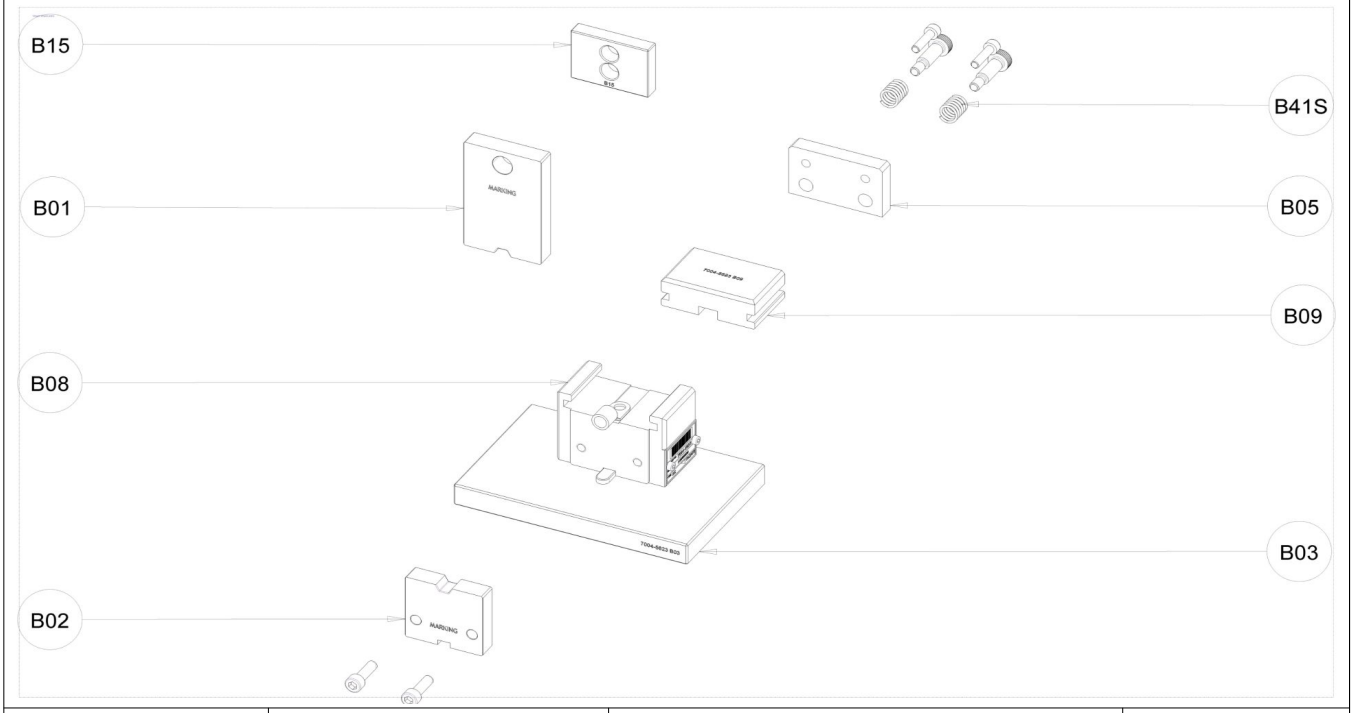

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01	***7004-5623-Z0BW***	WIRE CRIMPER	1
B02	***7004-5623-Z0BA***	ANVIL	1
B03	7004-5623 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7004-5623 B08	MAIN BLOCK	1
B09	7004-5623 B09	SLIDER	1
B15	B15	FRAME SPACER	1
B41S	41P00000811	SPRING	2